

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project :		
Model #:		
Item #:	Qty:	
Available W/H :		
Approval :		

Roll-In Solid Door Heated Cabinet

Roll-In PRO Series

Model: PRO-50H-RI

___ FEATURES & BENEFITS =__

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- · Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- · Digital display allows for easy monitoring.
- · Sensitive touch display.

■ Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ LED interior lighting

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Full length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime quaranteed heavy duty hinges and handles











Model	Swing Door	CU./FT.	#of Rack Accepted	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D*x H † (inches)
PRO-50H-RI	2	75.59	2	3000	15	696	667/8 x 373/4 x 841/4

(unit: inch)

Model: PRO-50H-RI

ELECTRICAL DATA					
Voltage	208/115/60/1				
Plug Type	③ NEMA L14-20P				
Full Load Amperes	15				
Wattage (W)	3000				
Feed Wires with Ground	4				
Cord Length (ft.)	8				
DIMENSIONAL DATA					
# of Doors	2				
# of Racks Accepted	2				
Net Capacity (cu. ft.)	75.59				
Ext. Length Overall (in.)	667/8 (1700mm)				
Ext. Depth Overall (in.)	373/4 (960mm)				
Ext. Height Overall (in.)*	841/4 (2140mm)				
Int. Length Overall (in.)	573/8 (1459mm)				
Int. Depth Overall (in.)	31 _{1/2} (800mm)				
Int. Height Overall (in.)	667/8 (1699mm)				
Rack Size (L x D x H) (in.)	27 x 29 x 66				
Net Weight (lbs.)	544				
Gross Weight (lbs.)	696				


Design and specifications subject to change without notice.


■ WARRANTY: 3 Year Parts and Labor Warranty

STANDARD FEATURES

- Door locks standard
- · Solid and sturdy grille design
- · Heavy duty stainless steel ramp standard
- ** Lead time applies. Please contact your sales representative for more details to order.

PLAN VIEW

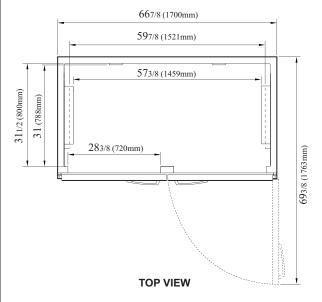

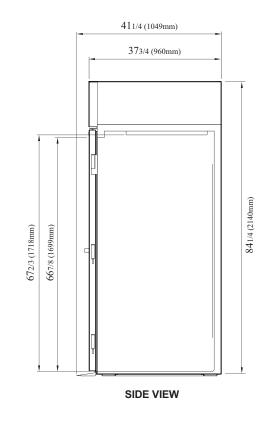

Ver.20200420


















Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles. Depth does not include 5-1/2" for ramp.