

Commercial Manual Gas Griddle

SPEC SHEET

MODEL#: PMG-HD SERIES



MODEL # PMG-36-HD

Specifications

- Stainless Steel Front And Sides
- **High Powered** U-Shaped Burner
- CSA Approved Brass Gas Valve
- 25mm/1 " thick griddle plate
- Manual ignition
- Adjustable height legs
- 3/4" rear gas connection
- ETL Safety and ETL Sanitation approved

Choose GAS TYPE When Placing Order

- LPG**
Liquefied Propane Gas
- Natural Gas**


Models in PMG-HD series

- PMG-24-HD Gas Griddle**
- PMG-36-HD Gas Griddle**
- PMG-48-HD Gas Griddle**
- PMG-60-HD Gas Griddle**

Standard Accessories

- Adjustable bullet leg
- NG to LP Conversion Kit

PRODUCT DIMENSION CHART

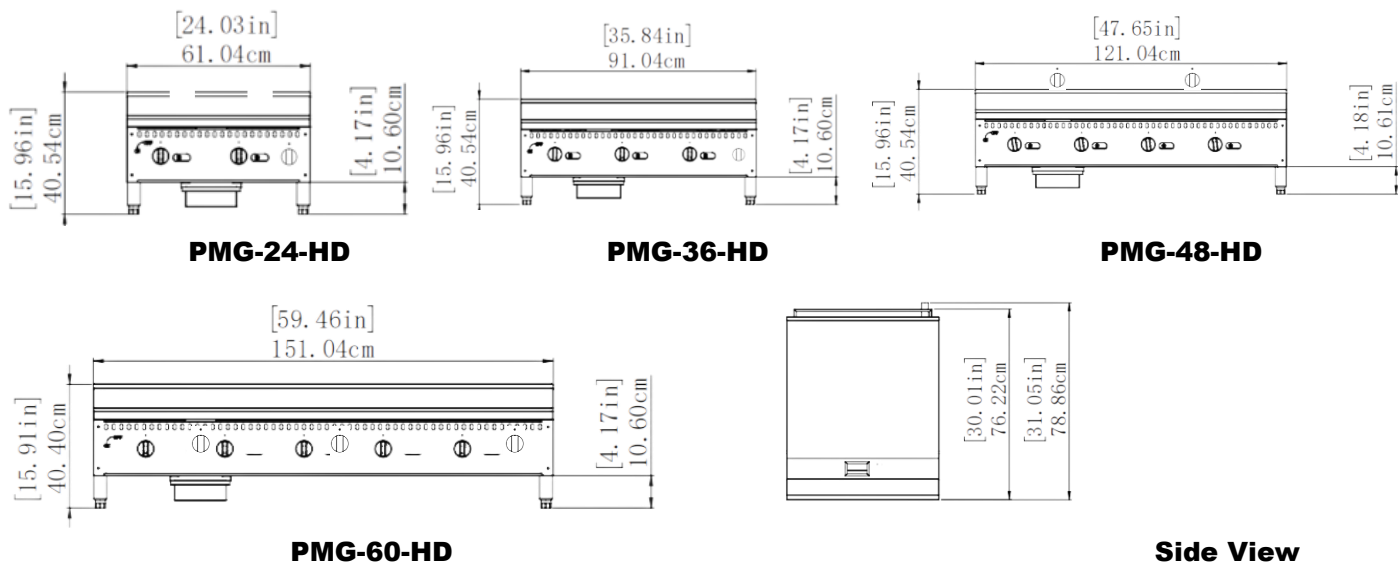

Key Parameters

Model #	Product Dimension	Heat Power	Heating Burner	Gas Consumption:	Gas inlet Connection	N.W	G.W	Packing dimension
PMG-24-HD	24x31.05x15.96 inch 610x789x405mm	60,000 BTU/H	2	LPG: 0.68(kg/h) Town Gas: 1.578(kg/h)	3/4" NPT Male	90.5kg	110.5kg	740X900X510mm
PMG-36-HD	36x31.05x15.96 inch 910x789x405mm	90,000 BTU/H	3	LPG: 1.02(kg/h) Town Gas: 2.367(kg/h)	3/4" NPT Male	129.5kg	156kg	1040X900X510mm
PMG-48-HD	48x31.05x15.96 inch 1210x789x405mm	120,000 BTU/H	4	LPG: 1.36(kg/h) Town Gas: 3.156(kg/h)	3/4" NPT Male	165kg	196kg	1345X900X510mm
PMG-60-HD	60x31.05x15.96 inch 1510x789x405mm	150,000 BTU/H	5	LPG: 3.946(kg/h) Town Gas: 1.578(kg/h)	3/4" NPT Male	204.5kg	242.5kg	1625X900X510mm