



Project \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000



SDPE/SDPS SALAD DRYERS

## SDPE/SDPS Salad Dryers



### SPECIFIER STATEMENT

Specified unit is a polyethylene (SDPE) or stainless steel (SDPS) salad dryer. With 20 gallon capacity, specified unit can hold approximately 16 heads of lettuce. Unit is equipped with a ¼ HP motor with thermal overload protection, 5 minute timer and easy load polyethylene spin basket with hand grips.

### MODELS

- SDPE** All polyethylene salad dryer
- SDPS** Stainless steel salad dryer

### STANDARD FEATURES

- + ¼ HP motor with thermal overload
- + Permanently lubricated gear drive
- + 406 RPM
- + Polyethylene (Model SDPE) or stainless steel (Model SDPS) outer tub and lid with fully sealed polyethylene base
- + Stainless steel motor splashguard
- + 5 minute timer
- + Polyethylene spin basket with hand grips
- + Drain pipe extension tube for draining into floor or container up to 9" high
- + Lockable casters

### ACCESSORIES

- Extra spin basket

### Plugs and Receptacles

*Dependent on Local Power Codes*

Machine Voltages		
<b>SDPE/SDPS</b>	<b>115/60/1</b>	<b>230/50/1</b>
<b>Service Current Requirement if Plug Connected</b>	120/60/1	230/50/1
	15 Amp.	15 Amp.
<b>Terminal Designation of Plug</b>	2 Pole 3 Wire Grounding	2 Pole 3 Wire Grounding
<b>NEMA Plug Configuration</b>	5-15P	6-15P
<b>Plug Configuration</b>		
<b>Molded Plug on Cord</b>	Yes	Yes
<b>Plug – Straight/Angle</b>	Straight	Straight
<b>NEMA Receptacle or Connector Configuration</b>	5-15R	6-15R
<b>Power Cord Included</b>	Yes	Yes

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_

### SOLUTIONS / BENEFITS

#### PERFORMANCE

##### ¼ HP Motor with 406 RPM

- + Ideal speed and power to spin off water without damaging product

##### Permanently Lubricated Gear Drive

- + Ensures gear drive is properly lubricated for better performance

#### EASE OF USE

##### Easy Load Polyethylene Spin Basket

- + Simple loading and unloading of product

##### 5 Minute Top-Mounted Timer

- + Easy to reach timer

##### Large, Locking Casters

- + Easy mobility
- + Prevents salad dryer from moving during operation

##### Drain Pipe Extension Tube

- + Easily drain excess water

##### Permanently Lubricated Gear Drive

- + Less maintenance for the operator

#### SANITATION & CLEANING

##### Polyethylene (SDPE) or Stainless Steel (SDPS) Outer Tub and Lid with Fully Sealed Polyethylene Base

- + Easy to clean

##### Easy Load Polyethylene Spin Basket

- + Removes easily for cleaning

#### OPERATOR ASSURANCE

##### Thermal Overload Protection

- + Protects salad dryer from overheating

### SPECIFICATIONS

**Electrical:** 115/60/1 and 230/50/1. 230/50/1 not submitted for UL listing.

**Motor:** ¼ HP, 2.5 amps gear motor with thermal overload and permanently lubricated gear drive.

**Switch:** 5 minute timer.

**Housing:** All polyethylene outer tub and lid and a polyethylene, one-piece molded, fully sealed base on the SDPE. All stainless steel outer tub and lid and a polyethylene, one-piece molded, fully sealed base on SDPS. Stainless steel motor splash guard protects fully sealed motor.

**Basket:** Polyethylene spin basket with hand grips.

**Drain:** Water drains through a 1¾" OD extension tube directly into floor drain or container up to 9" high.

**Casters:** Lockable, heavy-duty casters with brakes.

**Cord & Plug:** 7 foot, 3-wire cord and grounding type plug.

**Accessories:** Extra spin basket.


**Warranty:** Unit has full one-year warranty on parts, labor and mileage against manufacturer's defects.

#### Weight:

SDPE: Shipping – 88 lbs.; Net – 60 lbs.

SDPS: Shipping – 113 lbs.; Net – 75 lbs.

**WARNING:** Electrical and grounding connections must comply with the applicable portions of the National Electrical Code and/or other codes in force.

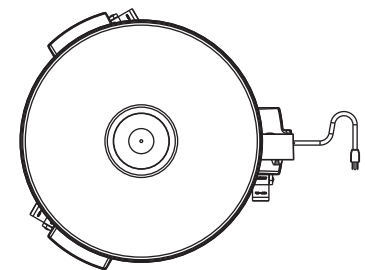

7 Foot  
Power Cord Standard  
(Single Phase Machines)

