**PALLADIO 330 AUTOMEC** 





- Semi-automatic slicer designed for repeatable slicing requiring limited attendance, maximizing the productivity of kitchen labor
- Special end weight and adjustable vertical product fence to provide stability and advance products evenly
- Carriage release system for manual operation
- Exclusive high-quality, rounded, no edges design, increased blade and machine body gap, easy breakdown for a fast and effective cleaning
- Inner blade cover ensures a perfectly aligned cut. No waste when cutting same product at different times.
- Zero blade exposure due to a permanent blade rim guard, a safety hand guard mounted to the carriage and a carriage lockout to prevent exposed blade edge

# **Features**

### Technical:

- The sharpener assembly is made entirely from aluminum, no plastic presence that may break with heavy use.
- The tie rod assembly and all external screws are made of stainless steel for longer life.
- The slide shaft is made of ground, chromed steel for a smoother operation.
- The high-quality bushings and ball bearings are self-lubricating.
- The dial thickness control cam system allows for an always precise cut.

#### Safety:

- A safety cover is placed under the motor and the electrical components.
- The hopper features an exclusive heavy duty plastic protection to keep operator's hand at a safe distance from the blade while operating the slicer.
- A permanently-mounted knife ring guard covers the non- cutting side of the blade.
- Overcurrent and no volt release protection

#### Sanitary:

- Easy to clean aluminum alloy construction does not crack or stain.
- The screws are stainless steel and resist wear and oxidation.
- The carriage and the center plate are quickly removable without tools.
- Exceptionally easy and roomy access to the back of the blade.

# Specifications

**Operation:** Gravity feed.

**Construction:** Polished, anodized aluminum alloy.

**Knife:** One piece, chromium plated 100Cr6 forged carbon steel blade.

**Sharpener:** Built-in, removable, two stone dual action.

Slice thickness: Infinitely variable up to 13/16" Motor: 1/2 Hp (410 W), fan cooled.

Electrical: 120V AC, 60Hz, 3.4A (220V, 50Hz available on request).

Plug & Cord: Attached, flexible, 3 wire SJT 18 AWG, 6'4" long cord.

Switch: Two (2) electronic keypads with on/off buttons.








Increased gap between blade and machine body




Large receiving tray



Inner blade cover avoids product waste

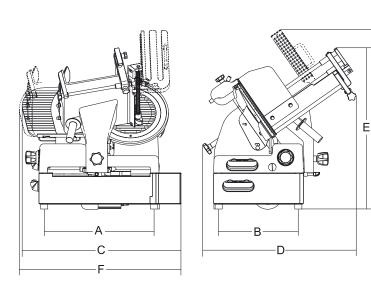



	Ø Blade	Motor	Cut thickness	Blade rpm	Carriage stroke	Норрег	А	В	С	D	E	F	G	X	Y	Н	W	Net weight	Shipping	Gross weight
	mm/inch	watt/Hp	inch.	rpm	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
Palladio 330 AUTOME	<b>C</b> 330/13"	410-0,55	1 3/16"	315	12 3/16" 1	4 <sup>3/8</sup> " x 10 <sup>5/8</sup> "	18 5/16"	13 3/8"	26 15/16"	26	26 3/8"	27 9/16"	29 1/2"	9 7/16" / 9 7/16"	8 1/4"	10 1/4"	9 7/16"	123	34 <sup>1/4</sup> " x 33 <sup>1/16</sup> " x 29 <sup>1/2</sup> "	156

G

