

SOFTCOOKER S - SR

water baths



SOFTCOOKER SR 1/1 GN



SOFTCOOKER S 2/3 GN

- Sous-vide water baths offer an excellent temperature stability, reliability and flexibility
- Choice of two sizes, 2/3 GN and 1/1 GN
- Bright LED display visualizes temperature and working time
- Temperature range from 86 °F to 212 °F, accuracy 32 1/2 °F
- 5 programs allow to save your favorite recipes
- Compact space-saving design with practical handles to carry it easily.

Features

Technical:

- AISI 304 stainless steel insulated shell and inner container
- Powerful shock-proof heating element is positioned under the inner container and provides effective heating
- Display in °C or °F
- Energy-saving feature that reduces energy consumption, when the set temperature is reached, without any loss of temperature control
- Supplied with lid to minimize heat loss and water evaporation
- Optional drain tap for easy emptying

Safety

- Removable perforated tray over the base of the container prevents poaches from coming into contact with the heated bottom
- Safety cut-out switches off the unit, if it is accidentally run with little water
- Equipped with a thermal protection to prevent overload and over temperature
- Alarm and fault indicators

Sanitary

- High-quality seamless stainless steel construction is durable and easy to clean

Specifications

Construction:

AISI 304 stainless steel enclosure and container

Electrical:

120 V, 60 Hz, Amp

Plug & Cord:

Attached, flexible, 3 wire SJT 18 AWG, 6'4" long cord, NEMA 5-15P

Switch:

Membrane keypad with 4-digit LED display

Benefits


- Cost-effective entry-level option for those who approach the sous-vide cooking for the first time



SOFTCOOKER SR 2/3 GN



SOFTCOOKER S 1/1 GN

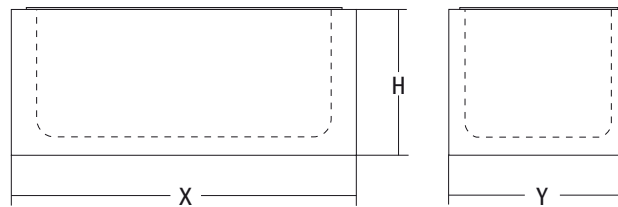

	Power	Power source	Temperature	Bowl capacity	Bowl filling level	X	Y	H	Net weight	Shipping	Gross weight
	watt		°C / °F	gal	gal	inch.	inch.	inch.	lbs.	inch.	lbs.
SOFTCOOKER S 2/3 GN	1150	120V/60Hz	30 ÷ 100 / 86 ÷ 212	4.36	3.70	15 ^{23/64} "	14 ^{11/64} "	11 ^{13/16} "	11	23 ^{5/8} " x 19 ^{11/16} " x 16 ^{17/32} "	19
SOFTCOOKER SR 2/3 GN	1150	120V/60Hz	30 ÷ 100 / 86 ÷ 212	5.02	4.49	15 ^{3/4} "	14 ^{9/16} "	11 ^{13/16} "	12	23 ^{5/8} " x 19 ^{11/16} " x 16 ^{17/32} "	19
SOFTCOOKER S 1/1 GN	1700	120V/60Hz	30 ÷ 100 / 86 ÷ 212	7	5.81	22 ^{1/4} "	14 ^{11/64} "	11 ^{13/16} "	35	23 ^{5/8} " x 19 ^{11/16} " x 16 ^{17/32} "	44
SOFTCOOKER SR 1/1 GN	1700	120V/60Hz	30 ÷ 100 / 86 ÷ 212	7.66	6.60	22 ^{41/64} "	14 ^{9/16} "	11 ^{13/16} "	36	23 ^{5/8} " x 19 ^{11/16} " x 16 ^{17/32} "	44