



SPA-160 • SFA-191 Ice Dispensers

Model

____ SPA-160

___ SFA-191

ONLY 22" WIDE

SPA Model

Designed for ice bucket filling in hotels, motels, and resorts

Ice only dispense, with coin-op and room card dispensing control options



Indigo Series 522 Ice Machine SPA-160 Ice Dispenser

Indigo Series 522 Ice Machine SFA-191 Ice & Water Dispenser

SFA Model

Designed for "large" container ice filling. Accepts up to 10.5" (26.67 cm) high container

Built-in water valve



Standard Features

- 120 lbs. (54.4 kgs.) ice storage capacity. Accepts 22" (55.88 cm) wide Manitowoc ice machine.
- Only 22" (55.88 cm) wide, 31" (78.7 cm) deep, and 75.5" high (191.77 cm).
- · Patented rocking chute dispense mechanism reduces in-flight ice and ice spillage with quick on/off activation.
- Efficient built-in agitator assures 100% dispensing. Oversized drain pan collects larger quantity of ice overflow.
- DuraTech™ exterior provides superior corrosion resistance. Stainless finish with innovative clear-coat resists fingerprints and dirt.

Warranty

- 5-year parts and 5-year labor coverage on ice machine evaporator.
- 5-year parts and 3-year labor coverage on ice machine compressor.
- 3-year parts-and-labor coverage on all other ice machine and dispenser components.

Ice Shape



Half Dice (.95 x 2.86 x 2.22 cm)



Dice










2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com







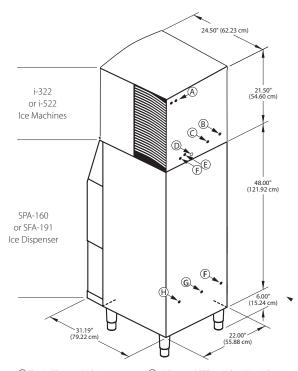

- (A) Electrical Entrance (2) Options
- B 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
- (1.2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
- ① 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- E 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
- © Dispenser Electrical Entrance
- \bigcirc 1/2" (1.27 cm) F.P.T. Melting Tray Pan Drain Floor To Drain Distance = 13" (With 6" legs)
- (H) Water Inlet: SFA-191 only

Installation Note - Dispensers have no minimum clearance, when installing an ice machine/dispenser combination follow the clearance requirements for the ice machine being installed.

Ice Machine Electric

Note: Dispenser will accept single 22" wide ice machine. Ice machine ordered separately. Choose Dice or Half Dice cube size. Refer to ice machine specification sheet for electrical and complete AHRI standard ratings.

Dispenser Electric:

115/60/1. (208-230/60/1 and 230/50/1 also available.)

Maximum Circuit Fuse Size:

15.0 amps. HACR-type circuit breakers can be used in place of fuses.

Dispenser Electrical Connection:

6' power cord, rated 125 VAC, 16-3 conductors with standard 3-prong, straight-blade, ground-type plug (NEMA configuration 5-15P).

Motor:

1.6 amps maximum. Permanently lubricated.

Service Access:

Dispenser door removes easily to access components.

Model Options:

SPA-160 push-for-ice rocking chute, SCA-163 coin-op and SRA-164 room card control available. To field-convert SPA-160 to SRA-164, call factory for information. SFA-191 has a water valve option.

Series 322 (115 volt)

		Ice Production 24 Hours					
	Ice	70°Air/50°F Water		90°Air/70°F Water			
Model	Shape	lbs.	kgs.	lbs.	kgs.		
ID-0322A	dice	335	152	225	102		
ID-0323W	dice	330	150	270	122		
IY-0324A	half-dice	350	159	230	104		
IY-0325W	half-dice	350	159	290	132		

Series 522 (115 volt)

		Ice Production 24 Hours					
	lce	70°Air/50°F Water		90°Air/70°F Water			
Model	Shape	lbs.	kgs.	lbs.	kgs.		
ID-0522A	dice	475	215	325	147		
ID-0523W	dice	460	209	375	170		
IY-0524A	half-dice	485	220	340	154		
IY-0525W	half-dice	480	218	395	179		

LuminIce™ Growth Inhibitor

reduces yeast and bacteria growth for a cleaner ice machine.



Options for SPA-160:



Room Card SRA-164



Coin-Op SCA-163 25-cent coin standard. ©2011 Manitowoc 5/11 Continuing product improvement

4358D

2110 South 26th Street
PO Box 1720
Manitowoc, WI 54221-1720 USA

Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com

