




**a Standex company**

Item \_\_\_\_\_

**SQ MARKET DELI™  
SELF-SERVE  
REFRIGERATED  
DELI CASE**

**MODEL SQ-3CDSS    SQ-6CDSS  
                          SQ-4CDSS    SQ-8CDSS  
                          SQ-5CDSS**

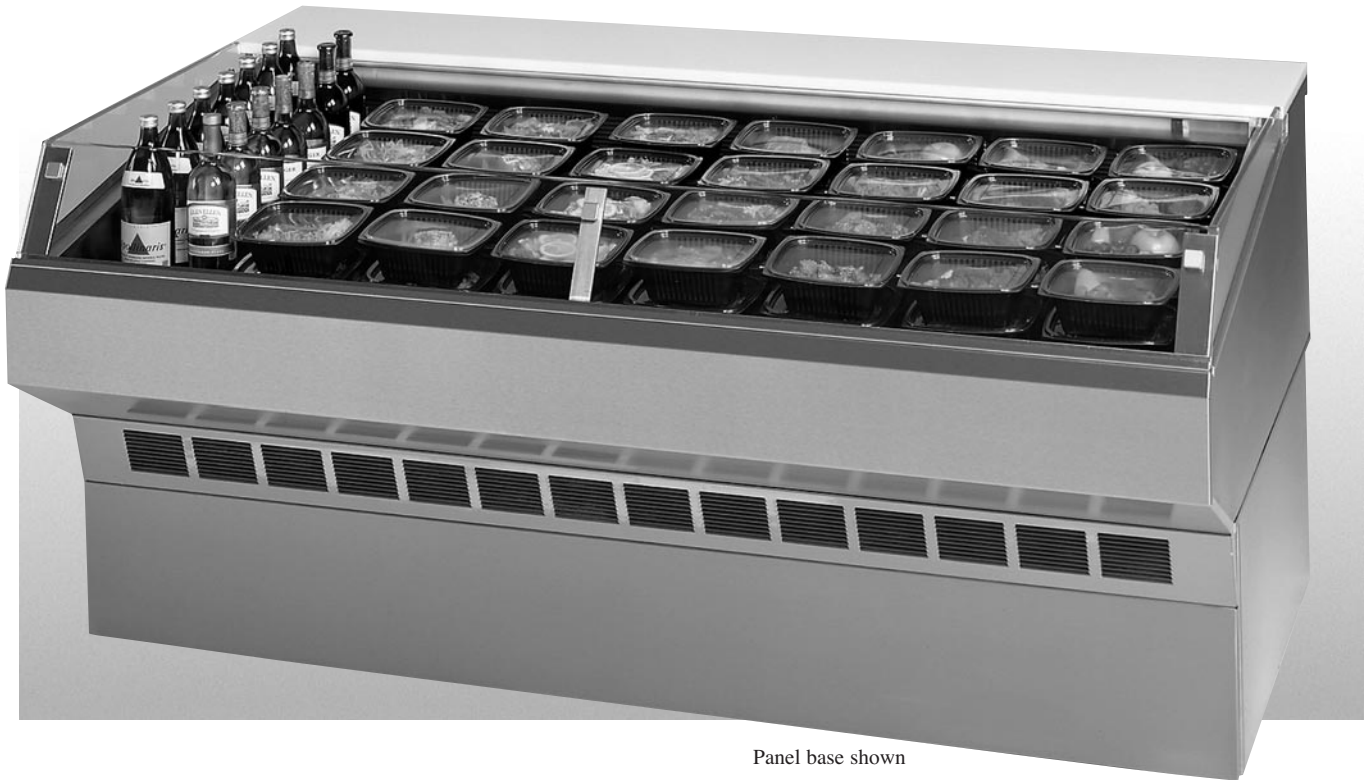

Panel base shown

*Market Deli. The merchandiser that provides solutions to your fresh food merchandising needs. Cases are available in lengths of 3', 4', 5', 6', and 8'.  
Designed for continuous case line-ups.*

**STANDARD FEATURES**



- Four point leveling system.
- Rear work counter.
- Octron case light.
- Pedestal or panel base design.
- Stainless steel interior and exterior finish.
- Solid-state control panel with main power, light, and temperature readout.
- Condensate evaporator provided for a totally self-contained system. Remote refrigeration available.
- Average case temperature of 36° to 38° F is maintained.
- Appliance receptacle provided on back for cash register, scale, or slicer.
- Coated evaporator coil.
- UL Safety & UL Sanitation Listed.
- Designed for continuous case line-ups.

# SQ MARKET DELI™

## SELF-SERVE REFRIGERATED CASE

### OPTIONAL ACCESSORIES:

- \* Special Case Height (34" or 36")
- \* Front Bumper Rail  
(Black, White, Green, Gray)
- \* Display Riser or Step Pan Holder
- \* Remote Refrigeration
- \* Decorative End Panel  
(Black, White, Green, Gray)
- \* Scale Stand
- \* Food Container Holder
- \* Accent Base Light
- \* Slicer Stand
- \* Promolux Lighting
- \* Fish Case Package  
(Includes Ice Pan and Drain)

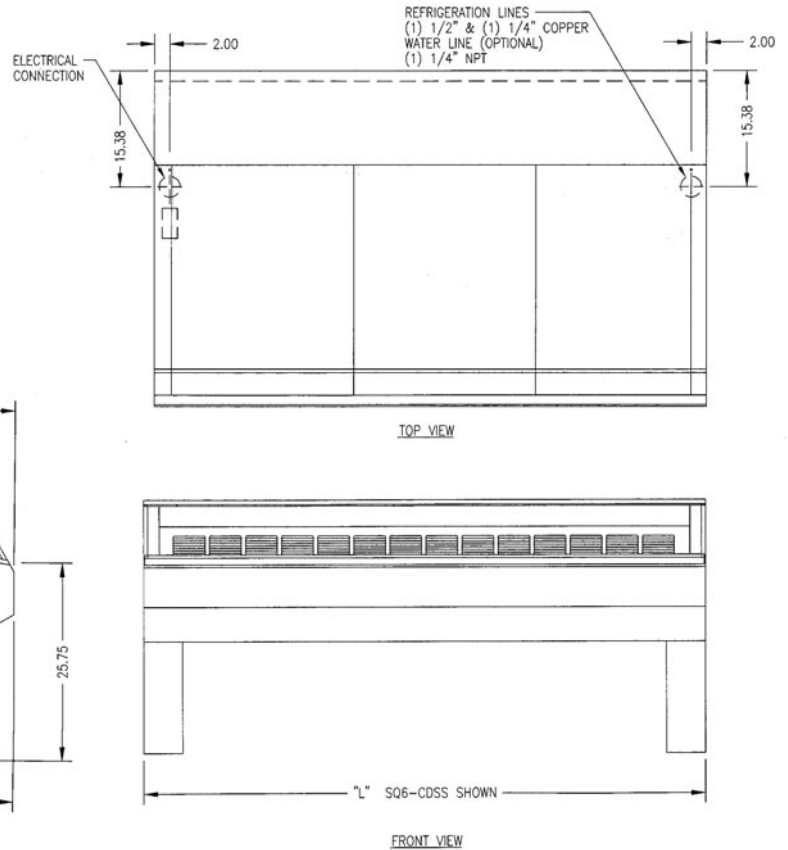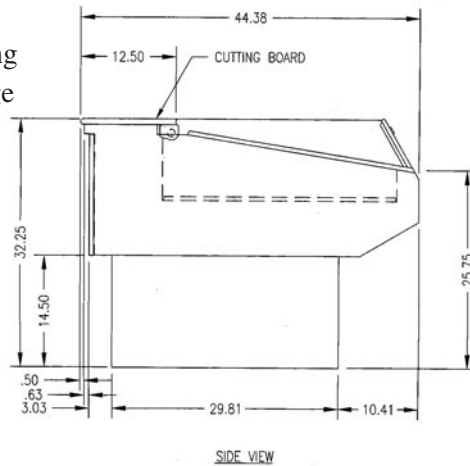

### SPECIFICATIONS:

Model	*Dimensions			Approx. Shipping Weight (lbs)	Capacity Display Riser	**Self-Contained 120/60/1	**Remote 120/60/1
	L	W	H				
SQ-3CDSS	36"	44 1/8"	32 1/4"	675	3	1/2 HP - 11.5 Amps	6 Amps
SQ-4CDSS	48"	44 1/8"	32 1/4"	795	4	1/2 HP - 13.8 Amps	7 Amps
SQ-5CDSS	60"	44 1/8"	32 1/4"	895	4	1/2 HP - 13.8 Amps	7 Amps
SQ-6CDSS	72"	44 1/8"	32 1/4"	1,035	7	1/2 HP - 14.8 Amps	7 Amps
SQ-8CDSS	96"	44 1/8"	32 1/4"	1,135	9	3/4 HP - 16.0 Amps	8 Amps

- \* Without decorative end panel.
- \*\* Plus general receptacle 120V, 15 Amp. (2nd circuit required.)
- **When ordering, specify case line-up and pedestal or panel design.**
- Cases are designed to operate in an environment of 75° ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



### Look to Federal for Innovative Merchandising



**a Standex company**

**Federal Industries**  
**A Standex Company**  
**215 Federal Avenue**  
**Belleville WI 53508-0290**  
**Phone: 800-356-4206**  
**Fax: 608-424-3234**  
**Email: geninfo@federalind.com**  
**Web Site: www.federalind.com**