



## FREEZER BASE (REMOTE CONDENSER)

*Platinum Series*



(Model 30072RSB with optional casters)

- 30032RSB (32" wide)
- 30036RSB (36" wide)
- 30048RSB (48" wide)
- 30060RSB (60" wide)
- 30064RSB (64" wide)
- 30072RSB (72" wide)
- 30084RSB (84" wide)
- 30096RSB (96" wide)
- 30108RSB (108" wide)

### Standard Features

- Available in 32", 36", 48", 60", 64", 72", 84", 96", and 108" widths that can support any of the modular sectional range tops
- Self-closing heavy-duty drawers slide on stainless steel rollers
- Drawers hold standard sized (12" x 20" x 4") pans -pans not included
- Removable door assembly
- CFC-free refrigeration system has an expansion valve for rapid temperature recovery -the remote condenser unit is NOT included
- Foamed-in-place CFC-free polyurethane insulation provides highest insulation factor available
- Rubber magnetic door gaskets provide a positive seal and easy cleaning
- Stainless steel top, front, sides, back, drawers, and interior cavity
- 6" adjustable stainless steel legs
- Coved interior corners (meets NSF standard #7)
- Condensate drain (1/2" I.D. tube) with standard electric condensate evaporator pan.
- Adjustable digital thermostat
- Mullion coils are coated to resist corrosion and provide maximum air flow for even cooling
- Operates on 120-volt single phase 50/60Hz AC power
- Warranty: two years on specified operational parts, five years on compressor, and one year on labor from date of purchase

### OPTIONS & ACCESSORIES AT ADDITIONAL COST

- Cable restraint kit (to restrict movement when on casters)
- Casters -front two casters lock
- Open-frame base with casters

### STANDARD CONSTRUCTION SPECIFICATIONS

**Exterior Finish:** Top, front, sides, back, drawers, and interior cavity are 304 stainless steel #3 polish.

**Drawers:** Stainless steel -holds standard size (12" x 20" x 4") pans -not included. Removable drawer assembly.


**Base:** 32-1/2" deep and 26" high, including adjustable legs or casters -32" units are 36" deep.

**Refrigerant:** R-404a -CFC-free. Uses an optional remote condenser.



Approval Notes: \_\_\_\_\_

\_\_\_\_\_

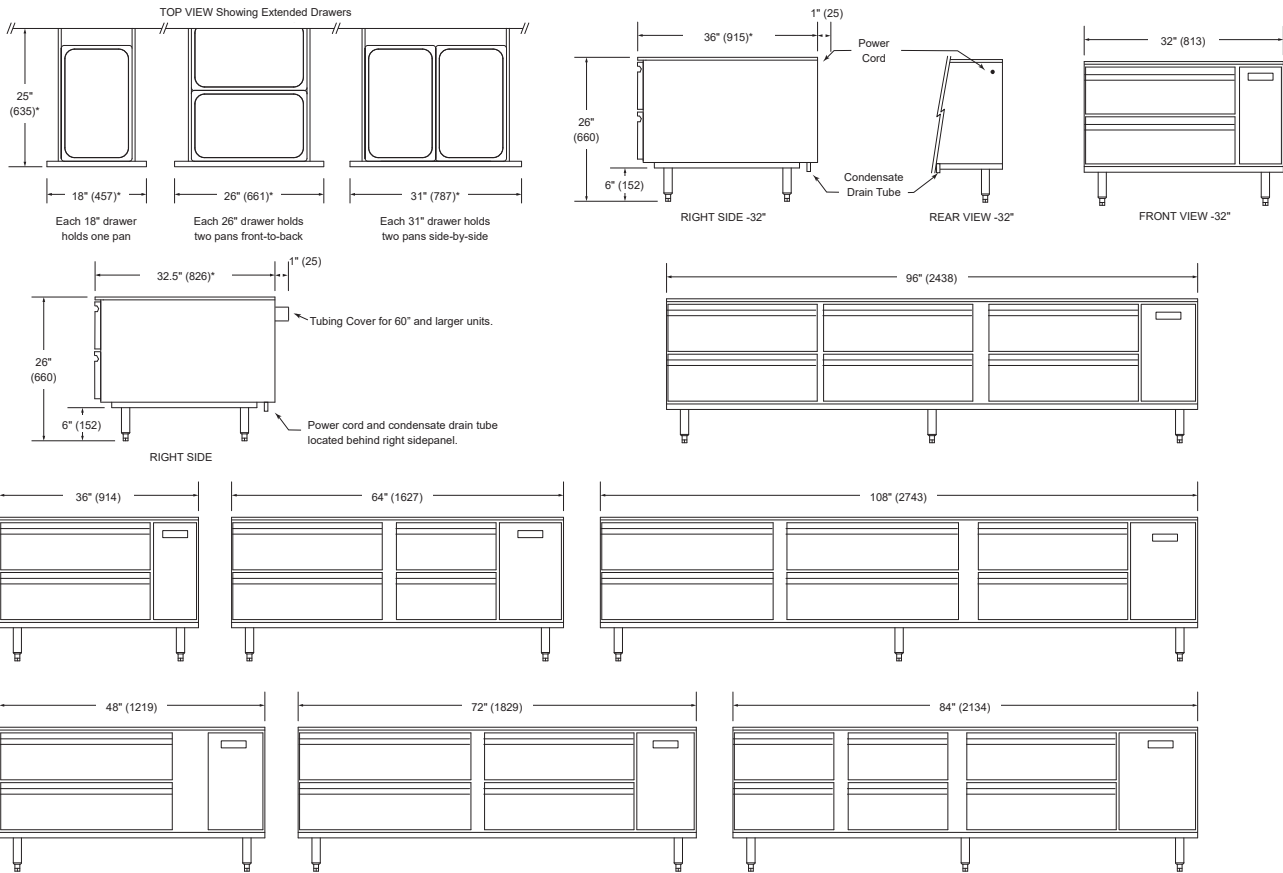

The drawer-front width, drawer-extension distance, and overall depth may vary (the maximum values are specified and shown)

**UTILITY INFORMATION**

Model	Width	# of Drawers			# of Pans	Cooled Volume cu. ft (cu. m.)	Cooling Cap BTU/hour	Electricity 120V Amps	Compressor Motor	Shipping Weight
		18"	26"	31"						
30032RSB	32"	-	2	-	4	7.3 (0.21)	1550	8	1/3 H.P.	325 lbs (147 kg)
30036RSB	36"	-	2	-	4	7.3 (0.21)	1550	8	1/3 H.P.	325 lbs (147 kg)
30048RSB	48"	-	-	2	4	10 (0.28)	1775	8	1/3 H.P.	400 lbs (181 kg)
30060RSB	60"	2	2	-	6	13 (0.37)	1875	8	1/3 H.P.	530 lbs (240 kg)
30064RSB	64"	2	2	-	6	13 (0.37)	1875	8	1/3 H.P.	530 lbs (240 kg)
30072RSB	72"	-	2	2	8	16 (0.45)	1920	10.1	1/2 H.P.	637 lbs (289 kg)
30084RSB	84"	4	2	-	8	19 (0.54)	1955	10.1	1/2 H.P.	735 lbs (333 kg)
30096RSB	96"	-	6	-	12	23 (0.51)	1955	20	1/2 H.P.	835 lbs (379 kg)
30108RSB	108"	-	2	4	12	26 (0.74)	2000	20	1/2 H.P.	940 lbs (426 kg)

Amperage is approximate and is for compressor only. Do not use for breaker sizing.

All models have a six foot power cord with a grounded plug to receive 50Hz or 60Hz single-phase AC. Condensate drain is a 1/2" inside diameter vinyl tube. Condenser unit is NOT included.

**MISCELLANEOUS**

- If casters are used with flex hose, a restraining device should be used to eliminate undue strain on the flex hose.
- Minimum clearance on rear is 2" (51 mm)
- Modular range top sections can be mounted directly on top using an insulated base adapter.
- Can be part of sectional battery, provided that the adjoining base sections are insulated, or do not produce heat.

- Avoid locating where the temperature will drop below 55°F or rise above 90°F
- Check local codes for fire and sanitary regulations.

**NOTICE:**

Southbend has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

**INTENDED FOR COMMERCIAL USE ONLY.  
NOT FOR HOUSEHOLD USE.**

