



## ADVANTEDGE™ BOTTLE COOLERS



NLBC80

PROJECT:  
 .....  
 ITEM NUMBER:  
 .....  
 MODEL NUMBER:  
 .....

BOTTLE COOLERS

### SPECIFICATIONS FOR: NLBC50, NLBC65, NLBC80 & NLBC95

- **Finish:** Black vinyl coated steel cabinet exterior front, sides and back with stainless steel top and sliding covers. Interior galvanized walls and stainless steel floor with floor drain.
- **Insulation:** Foamed-in-place with 1-1/2" CFC free polyurethane insulation.
- **Hardware:** Standard with removable bottle opener cap catcher, integrated glass rail on rear top, easy glide sliding lids with locks. Adjustable product dividers supplied. Plastic breaker strips around door openings to limit the formation of any condensation.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and NEMA 5-15P plug.
- **Refrigeration:** Self-contained forced air R-134a capillary tube refrigeration system. Automatic defrost and condensate evaporator requires no plumbing. Adjustable temperature control with temperature range: +34°F to +38°F.
- **Approvals:** UL, C-UL Safety and ETL Sanitation (US & Canada) \*\*

### STANDARD FEATURES

- Adjustable temperature control
- Air cooled condensing unit
- Automatic defrost and condensate evaporator
- Black vinyl coated steel exterior
- Capillary tube system
- Durable galvanized interior walls
- Removable cap catcher
- Multiple evaporator fan motors
- Stainless steel top with integrated glass rail
- Stainless steel interior floor
- Stainless steel sliding lids with locks
- Temperature range: +34°F to +38°F
- Vinyl coated product dividers
- UL, C-UL Safety and ETL Sanitation (US & Canada) \*\*
- Warranties: 3 year parts & labor, 5 year compressor


### OPTIONAL FEATURES\*

- Additional dividers
- 4" plate casters


\*Most options are available one week from receipt of order. Please contact us for specific questions.

\*\* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


\*\* UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

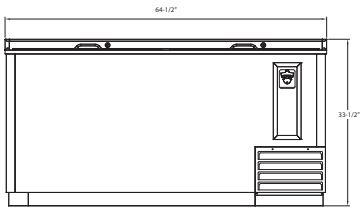


**FRONT  
NLBC65**

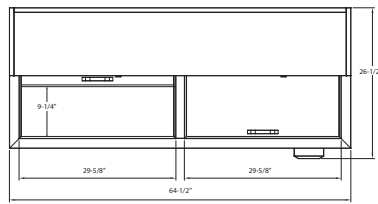


**TOP  
NLBC65**




**FRONT  
NLBC50**




**TOP  
NLBC50**

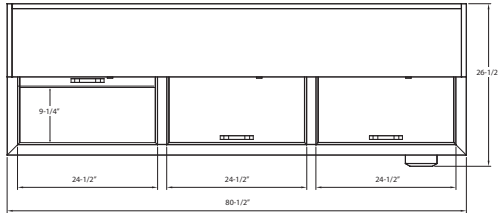


**TOP  
NLBC80**

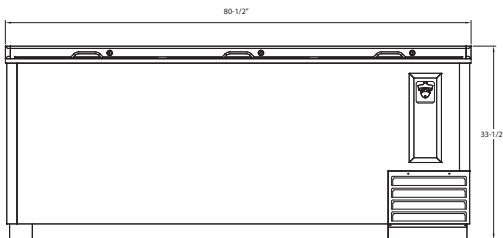


**FRONT  
NLBC80**

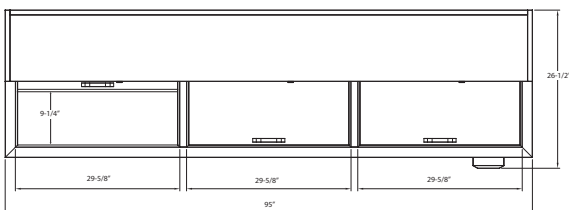

**TOP  
NLBC95**

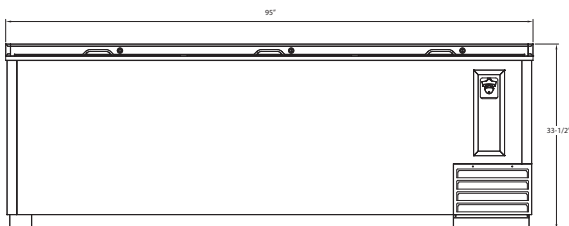

**FRONT  
NLBC95**



**SIDE VIEW  
ALL MODELS**

**SPECIFICATIONS**

<b>Models</b>	<b>NLBC50</b>	<b>NLBC65</b>	<b>NLBC80</b>	<b>NLBC95</b>
<i>Crated Weight (lbs) (kg)</i>	260 (118)	310 (141)	415 (188)	430 (195)
<i>Crated Height (in) (cm)</i>	41 (104)	41 (104)	41 (104)	41 (104)
<i>Crated Width (in) (cm)</i>	52-1/2 (133)	67 (170)	83 (211)	97-1/2 (248)
<i>Crated Depth (in) (cm)</i>	29-1/8 (74)	29-1/8 (74)	29-1/8 (74)	29-1/8 (74)
<i>Interior Height (in) (cm)</i>	27-7/8 (71)	27-7/8 (71)	27-7/8 (71)	27-7/8 (71)
<i>Interior Width (in) (cm)</i>	46 (117)	60-1/2 (154)	76-1/2 (194)	91 (231)
<i>Interior Depth (in) (cm)</i>	22-3/4 (58)	22-3/4 (58)	22-3/4 (58)	22-3/4 (58)
<i>Overall Height (in) (cm)</i>	33-1/2 (85)	33-1/2 (85)	33-1/2 (85)	33-1/2 (85)
<i>Overall Width (in) (cm)</i>	50 (127)	64-1/2 (164)	80-1/2 (205)	95 (241)
<i>Overall Depth (in) (cm)</i>	26-1/2 (67)	26-1/2 (67)	26-1/2 (67)	26-1/2 (67)
<i>Gross Cubage (CuFt) (L)</i>	14.8 (419)	20.1 (569)	26 (736)	31.3 (886)
<i>Number of Dividers</i>	3	4	5	6
<i>Condensing Unit Size</i>	3/8 HP	3/8 HP	3/8 HP	3/8 HP
<i>Refrigerant</i>	R-134a	R-134a	R-134a	R-134a
<i>Electrical Characteristics</i>	115/60/1	115/60/1	115/60/1	115/60/1
<i>Cord and Plug Furnished</i>	Yes	Yes	Yes	Yes
<i>NEMA Plug Configuration</i>	5-15P	5-15P	5-15P	5-15P
<i>Total Amp Draw</i>	6.1	6.1	6.1	6.1
<i>12 oz. Can Capacity</i>	857	1191	1575	1893
<i>12 oz. Bottle Capacity</i>	377	539	715	877

*Specifications subject to change without notice.*

*\* Floor drain connection exits the rear of the cabinet condensing unit compartment.*



**NORLAKE**<sup>®</sup>

Revision Date: 03/15  
©2015 NOR-LAKE, INC  
Printed in the USA  
Part Number: 143469

