



ITEM # \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 PROJECT NAME \_\_\_\_\_

SIS #

AIA #



ST-27-2



ST-45-3

# SUPER SANDWICH/SALAD PREP TABLES

**27" Wide Models ST-27-2**

**45" Wide Models ST-45-2 & ST-45-3**

**59" Wide Models ST-59-3 & ST-59-4**

## Standard Features

- "One-shot" high-pressure, foamed-in-place Polyurethane insulation
- Automatic defrost
- Matched coil and compressor
- Energy-free automatic condensate evaporator
- No need for plumbing or floor drains
- Heavy-duty stainless steel tops, fronts, doors and exterior ends
- 6" adjustable legs
- Full access, combination stainless steel telescoping box cover and utility shelf
- 4" deep salad/condiment pans
- 10" full-width removable/reversible synthetic cutting board
- Interior thermometer



McCall Refrigeration specification sheets are available online @ [www.mccallrefrigeration.com](http://www.mccallrefrigeration.com)

Approval : \_\_\_\_\_

## SPECIFICATIONS

**Cabinet** - Stainless steel top, front, door(s) and exterior ends. All metal, welded construction. All joints and seams closed and sealed. Enclosed rear with removable machine compartment panel, Zinc coated steel exterior bottom and rear with coved, sanitary aluminum interior (S/S interior available if specified.). Salad and sandwich unit model tops are provided with foamed-in-place, high impact non-conducting thermobarrier, raised edge breaker frame. Opening fitted with 1/6 size 4" deep high-impact plastic salad pans. Openings will accommodate 6" deep inserts (not provided). The unit is supported by 6" minimum height adjustable legs with non-marring feet.

**Doors** - Self-closing with full face S/S exterior and aluminum inner pan standard, stainless steel optional. Door insulated with one-shot, polyurethane and one piece vinyl, self-adjusting

magnetic gasket keyed into a thermal-breaker retainer frame. Gaskets are removable without tools for cleaning. All door openings have full perimeter minimum-wattage anti-condensate heaters behind the S/S fascia to retard condensation. One piece door pull with concealed self-closing hinge mechanism, safety stops and stay open feature. Doors on the single section models are reversible and can be quickly rehinged without special tools (with additional hardware). These are shipped from factory hinged on the right, facing cabinet.

**Insulation** - Entire cabinet, and door insulated with special, extra rigid one-shot, high pressure, foamed-in-place, closed cell polyurethane, average thickness 2". Moveable box cover lid has 1/2" insulation.

**Interior Shelves** - Two heavy-duty, adjustable,

removable epoxy coated shelves are furnished for each door section.

**Self-Contained Refrigeration** - The system is a forced-air, off cycle defrost, hermetic design with R-134a refrigerant, capillary-metering device, and automatic, adjustable thermostat. It is self-contained with air-cooled, condensing unit and a high-efficiency, space-saver diffuser with high-humidity, fin coil for extra long life. All models are complete with a removable, energy free automatic condensate evaporator. No floor drain or plumbing connections required.

All units are performance tested on the production line prior to shipping.

McCall Refrigeration / 81 West Holly Street / Parsons, TN 38363

Phone (731) 847-5570 / Fax (731) 847-9012 / 1-888-REACH-IN (1-888-732-2446) / [www.mccallrefrigeration.com](http://www.mccallrefrigeration.com)






September 2001 / Printed in U.S.A.

AIA #



Model ST-27-2  
ST-45-2  
ST-45-3  
ST-59-3  
ST-59-4

# SUPER SANDWICH/SALAD PREP TABLES

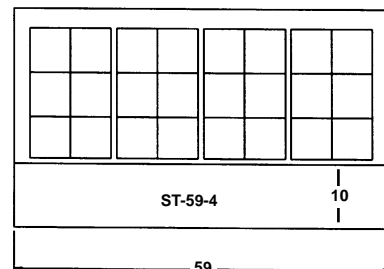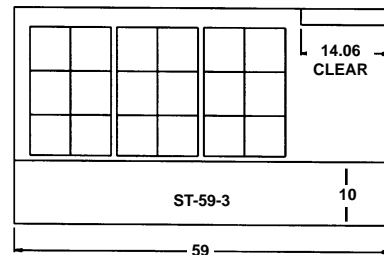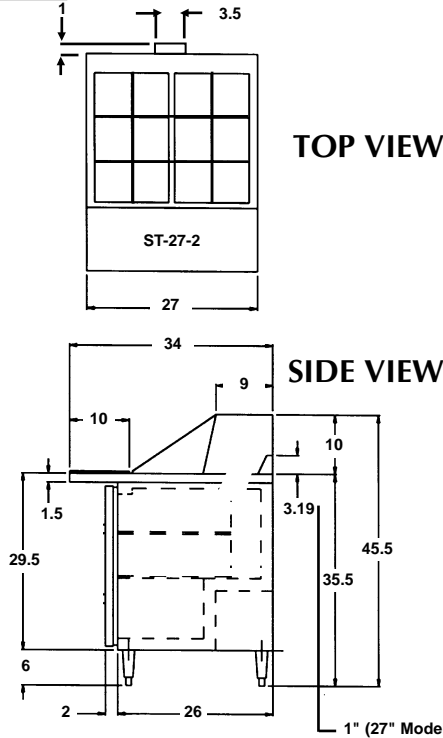

TOP VIEW

## DIMENSIONS

### One Door Super Sandwich Units (27" Models)

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Top	Comp HP	BTUH*	Cabinet Amps	Shipping Weight
ST-27-2	7	27"	35"	35.50"	12 Std. 1/6 Size Pans.	1/5	1440	6	240 lbs.

### Two Door Super Sandwich Units (45" Models)

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Top	Comp HP	BTUH*	Cabinet Amps	Shipping Weight
ST-45-2	12	45"	34"	35.50"	12 Std. 1/6 Size Pans.	1/4	1767	8	320 lbs.
ST-45-3	12	45"	34"	35.50"	18 Std. 1/6 Size Pans.	1/4	1767	8	320 lbs.

### Three Door Super Sandwich Units (59" Models)

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Top	Comp HP	BTUH*	Cabinet Amps	Shipping Weight
ST-59-3	16	59"	34"	35.50"	18 Std. 1/6 Size Pans.	1/4	1767	10	390 lbs.
ST-59-4	16	59"	34"	35.50"	24 Std. 1/6 Size Pans.	1/4	1767	10	390 lbs.

115 Volt, 60 Hz, 1 phase, 6', (3) wire power cord and polarized plug (NEMA 5-15).

\* Based on 90°F ambient and 20°F evaporating temperature.

\*\*6" height casters for 27" models.

3 3/4", 5", or 6" casters for 45" and 59" models.

Specifications subject to change without notice.

## Bidding Specifications

### McCall Super Sandwich Salad Prep Tables shall have:

Stainless steel front, door(s) and exterior ends. One-shot high-pressure, foamed in place polyurethane insulation. Automatic defrost. Energy-free automatic condensate evaporator. All metal construction. Insulated box cover lids. Matched coil and compressor. 2 shelves per section. No need for plumbing or drains. 6" adjustable legs. 4" deep pan inserts. 10" wide removable, reversible synthetic cutting board. Interior thermometer. Cord and plug attached. 115V, 60 Hz, NEMA 5-15

## OPTIONS

### Description

- Stainless steel interior.
- \*\*Swivel casters, two with brakes and two without brakes.
- Stainless steel overhead shelf.
- Stainless steel exterior rear and access panel.
- Door lock, individual cylinder type, keyed alike.

McCall Refrigeration / 81 West Holly Street / Parsons, TN 38363

Phone (731) 847-5570 / Fax (731) 847-9012 / 1-888-REACH-IN (1-888-732-2446) / www.mccallrefrigeration.com

September 2001 / Printed in U.S.A.