



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366  
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: \_\_\_\_\_

AIA #

Location: \_\_\_\_\_

SIS #

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model #: \_\_\_\_\_

## Glass & Plate Chillers/Frosters



T-24-GC

### Glass & Plate Chillers/Frosters

- T-24-GC,  T-36-GC,
- T-50-GC

True features the largest storage capacity in the industry - meets supply and demand requirements during peak hours.

### SPECIFICATIONS / FEATURES

#### *CABINET CONSTRUCTION:*

- Durable, non-peel or chip black laminated vinyl exterior (all models available in stainless steel exterior).
- All stainless steel countertop and lids.
- Interior - long lasting heavy duty galvanized steel. Construction of liner in accordance with NSF standards.

#### *DOORS:*

- Easy glide stainless steel lid.

#### *INSULATION:*

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

#### *REFRIGERATION SYSTEM:*

- Refrigeration system factory balanced using CFC free R404A refrigerant.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 0°F and below interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.
- Air vents on side to maximize flow of fresh air through condenser.
- Automatic defrost system.
- Self-contained system.

#### *ELECTRICAL CHARACTERISTICS:*

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.

115/60/1



Also available:

- Stainless Steel Exterior

Specifications subject to change without notice.

Printed in U.S.A.




APPROVALS:

5/1/02

Exceptions:



# T-GC-Series: Glass & Plate Chillers/Frosters

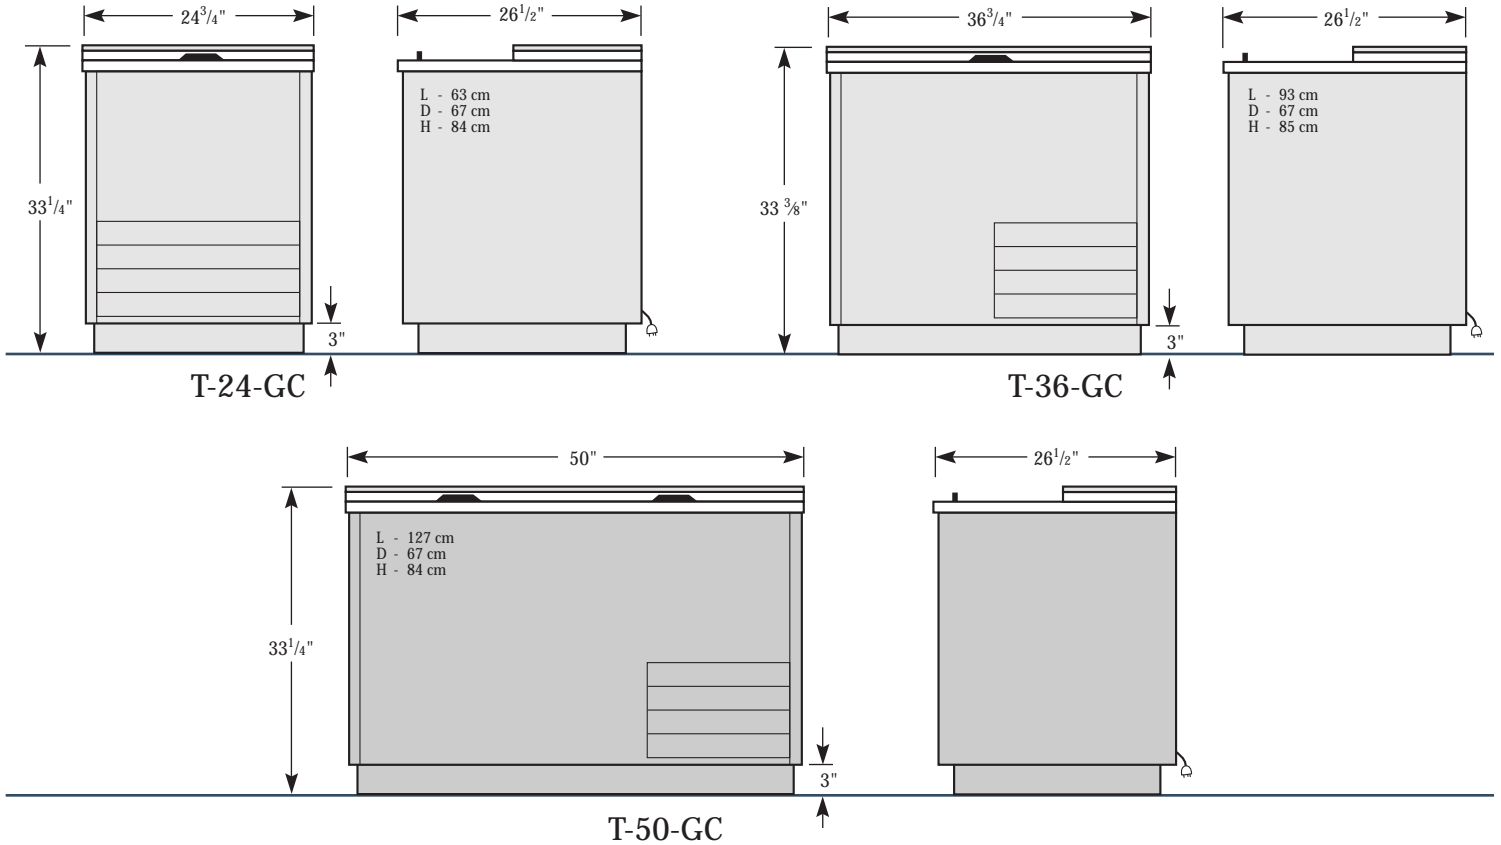

Rough-In Data											
Model	Capacity (8" mugs / 10" steins)	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
		L	D	H							
T-24-GC	90 / 85	24 3/4	26 1/2	33 1/4	1/4	115	1	5.8	5-15	7	160
T-36-GC	180 / 172	36 3/4	26 1/2	33 3/8	1/3	115	1	6.8	5-15	7	234
T-50-GC	250 / 240	50	26 1/2	33 1/4	1/3	115	1	7.6	5-15	7	282

note: All models available in stainless steel models.

Specifications subject to change without notice.

## Standard Features

- Stainless steel countertop and lids.
- Aluminum finished back.
- Durable, wear resistant, black laminated vinyl exterior.
- Interior - long lasting galvanized steel.
- Heavy duty vinyl coated wire racks - for maximum flexibility.
- Foamed-in-place high density polyurethane insulation (CFC free).
- Oversized environmentally friendly (R404A) refrigeration system holds 0°F and below.
- Automatic defrost system.
- Air vents on side of cooler.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self-contained system.

- 1 year parts & labor warranty (USA)
- 5 year compressor warranty

## Optional Accessories

- Additional wire racks available.

Model	Front	Right	Plan	3D
T-24-GC	TFLY03E	TFLY03S	TFLY03P	TFLY033
T-36-GC	TFLY02E	TFLY01S	TFLY02P	TFLY023
T-50-GC	TFLY01E	TFLY01S	TFLY01P	TFLY013

Clearance Required For Coolers (USA)		
Sides Inches/mm	Top Inches/mm	Rear Inches/mm
2 / 50	N/A	2 / 50



## TRUE FOOD SERVICE EQUIPMENT

