



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

24" Back Bar Storage Coolers



TBB-24-60

24" Back Bar Storage Coolers

- TBB-24-48**, **TBB-24GAL-48**
- TBB-24-60**, **TBB-24GAL-60**

True's oversized and balanced refrigeration system with extra large evaporator performs in the hottest, most humid climates. Excellent for all tropical beach bars.

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- 24" depth makes for easy placement in tight areas next to dry cabinetry.
- Durable, non-peel or chip black laminated vinyl exterior (stainless steel exterior available for all models).
- TBB-24-48 & TBB-24-60 feature a finished stainless steel top. TBB-24GAL-48 & TBB-24GAL-60 feature a galvanized steel top.
- Versatile flat top slides easily under bar or can be used as a counter/storage space.
- Interior - 300 series stainless steel floor with 1/2" lip and heavy galvanized steel walls. Construction of liner in accordance with NSF standards.
- Bright fluorescent interior lighting for excellent visibility.

DOORS:

- Positive seal doors. Door gaskets of one piece construction, and removable for ease in cleaning.
- Solid doors include 12" long horizontal recessed handle with sheetmetal interlock. Handles foamed-in-place CFC free polyurethane foam.
- Door locks standard.

INSULATION:

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33° to 38°F interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.
- Air vents on side to maximize flow of fresh air through condenser.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1
NEMA-5-15R

Also available:

- **Stainless Steel Exterior Back Bar Storage Coolers**
- **Glass Door Back Bar Storage Coolers**
- **Stainless Steel Exterior Glass Door Back Bar Storage Coolers**

Remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.

Specifications subject to change without notice.


Printed in U.S.A.



APPROVALS:

2/03

Exceptions:

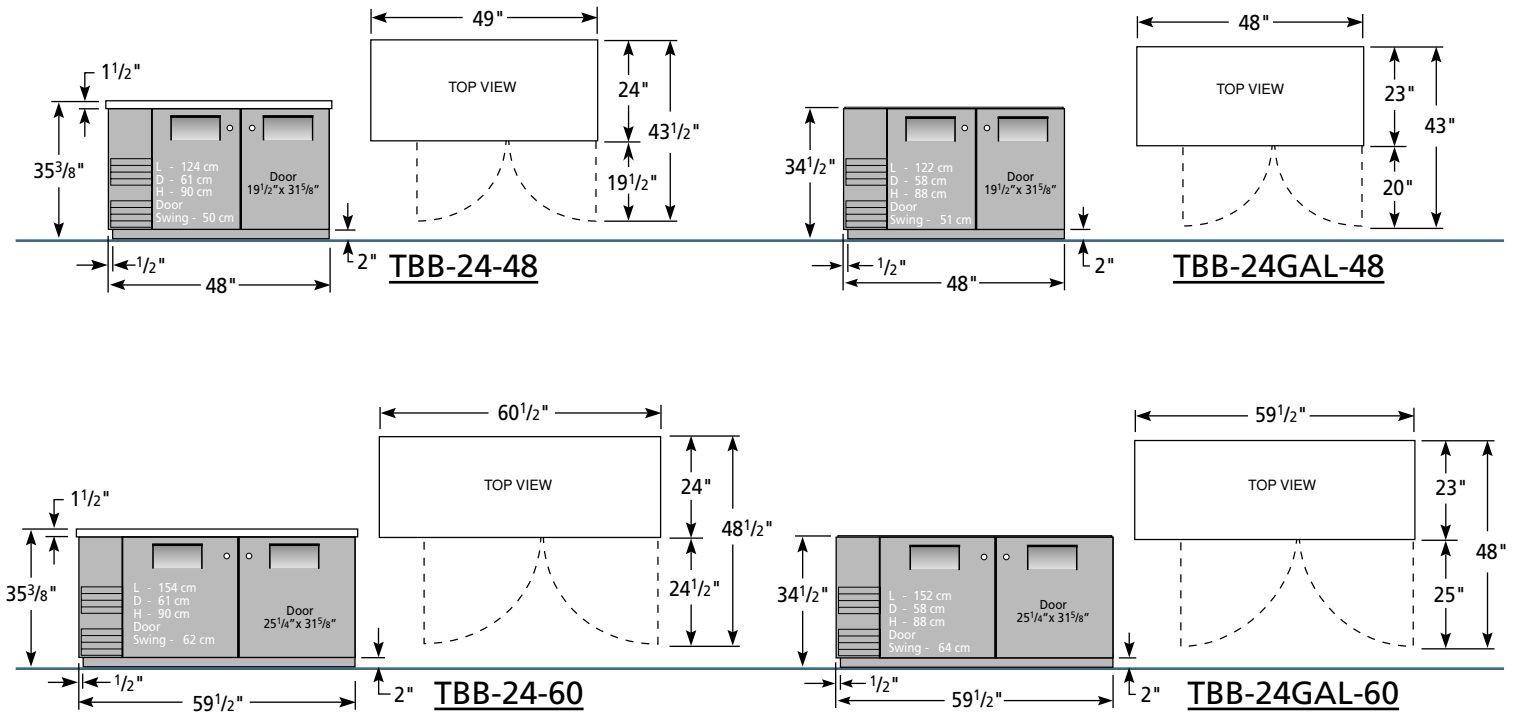

Rough-In Data

Model	Doors	Shelves	12 oz. cans	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D	H							
TBB-24-48*	2	4	82 6-packs	49	24	35 3/8	1/3	115	1	7.0	5-15	7	248
TBB-24GAL-48*	2	4	82 6-packs	48	23	34 1/2	1/3	115	1	7.0	5-15	7	228
TBB-24-60*	2	4	133 6-packs	60 1/2	24	35 3/8	1/3	115	1	6.0	5-15	7	320
TBB-24GAL-60	2	4	133 6-packs	59 7/8	23	34 1/2	1/3	115	1	6.0	5-15	7	300

* Available in glass door model.
 All models available with stainless steel exterior.

Specifications subject to change without notice.

Standard Features

- Oversized environmentally friendly (134A) refrigeration system.
- Quick pull down of hot 90°F products to cold 33°F to 38°F temperatures.
- 24" depth makes for easy placement in tight areas. Conserves valuable work space.
- TBB-24 models feature a finished stainless steel top providing an excellent work or storage area. TBB-24GAL models feature a galvanized steel top designed to slide under existing cabinetry providing a built-in look.
- Durable, black laminated vinyl exterior (available in stainless steel exterior).
- Interior - 300 series stainless steel floor with 1/2" lip & heavy galvanized steel walls.
- 2 heavy duty, 10 mill thick, pure grade vinyl coated wire shelves per door.
- Positive seal doors.
- Fluorescent interior lighting.
- Door locks standard.
- Foamed-in-place high density polyurethane insulation (CFC free).
- Air vents on side of cooler.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self-contained system.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.

Optional Accessories

- Available with 2 1/2" or 4" diameter stem castors.
- Available with optional stainless steel or seismic legs.
- Additional shelves available.
- Optional organizers available - one liter or wine bottle - 12 oz. bottle

	Model	Front	Right	Plan	3D
	TBB-24-48	TFJX35E	TFJX35S	TFJX35P	TFJX353
	TBB-24GAL-48	TFJX36E	TFJX36S	TFJX36P	TFJX363
	TBB-24-60	TFJX27E	TFJX27S	TFJX27P	TFJX273
	TBB-24GAL-60	TFJX28E	TFJX28S	TFJX28P	TFJX283

Clearance Required For Coolers (USA)		
Sides Inches/mm	Top Inches/mm	Rear Inches/mm
1 / 26	1 / 26	1 / 26

