	Model:	PROJECT NAME LOCATION			
	TBR72-RISZ1-L-B-SSS-1	Ітем #	Qty	AIA #	
REFRIGERATION DIVISION		Model #	SIS #		
TRUE MANUFACTURING CO., INC. 2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400	True Bar Refrigerator:				
Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com	Reach-In Single Zone Refrigerator				



FEATURES

- R290 Hydrocarbon refrigerant
- Temperatures of 33°F to 38°F (.5°C to 3.3°C)
- Exterior: Black powder coated cold rolled steel with stainless steel countertop
- Interior: Stainless steel
- RCU Technology
- White LED interior lighting
- NSF/ANSI standard 7 compliant for open food product
- UL Rated for outdoor use
- Three (3) interior access ports
- Field reversible doors
- Zero clearance (side and back)
- Front air intake / front air discharge
- Electronic temperature control with exterior digital display

ROUGH-IN DATA

$\label{eq:Specifications subject to change without notice. Chart dimensions rounded up to the nearest <math display="inline">\%$ " (millimeters rounded up to next whole number).

			Сара	acity 12 oz.	Cabinet Dimensions (inches) (mm)		115V/60/1 Voltage		Cord Length‡ (total ft.)	Crated Weight (lbs.)		
Model	Doors	Shelves	12 oz. Cans	Bottles	W	D†	Н	HP	Amps	NEMA	(total m)	(kg)
TBR72-RISZ1-L-B-SSS-1	3	9	125 6-pks	78 6-pks	72 1829	24% 631	34¾ 881	1⁄4	3.2	5-15P	10 3.04	405 184

† Depth does not include 1½" (35 mm) for door handles. * Height does not include ¼" (7 mm) for leg levelers ‡ Cord length listed represents usable cord length.

NTHE USA	APPROVALS:	AVAILABLE AT:
6/19 - MS		

Model:

TBR72-RISZ1-L-B-SSS-1

ADDITIONAL FEATURES

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system
- Environmentally friendly R290 hydrocarbon refrigerant
- Forced air refrigeration system which maintains 33°F to 38°F (.5°C to 3.3°C) product temperatures
- Exclusive RCU technology allows for the reversing of the condensor fan motor, helping to keep the condensing coil clean and reduce the negative effects of a dirty coil

CABINET CONSTRUCTION

- Exterior: Black, powder coated cold-rolled steel with stainless steel countertop.
- Interior: Stainless steel floor and sides with ABS plastic ceiling
- Insulation: Entire cabinet is foamed-in-place using a high density, polyurethane
 insulation that has zero ozone depletion and zero global warming potential
- Base fitted with leg levelers

PLAN VIEW

DOORSDoor locks standard

Field Reversible Doors standard (reverse hinge kit included)

Reach-In Single Zone Refrigerator

SHELVING

- Nine (9) adjustable, gray PVC coated wire shelves. 17¹% "W x 18"D (450 mm x 458 mm). Four (4) chrome plated shelf clips included per shelf.
- Aluminum shelf support pilasters. Shelves are adjustable on $\, ^{\prime }\! /_{2} \, "$ (13 mm) increments.

MODEL FEATURES

NSF/ANSI Standard 7 compliant for open food

True Bar Refrigerator:

- UL approved for outdoor use
- Electronic temp control with exterior digital display
- Three (3) access ports standard (see drawing for locations)

ELECTRICAL


 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.

REFRIGERATION


115/60/1 NEMA-5-15R

OPTIONAL FEATURES/ACCESSORIES Upcharge and lead times may apply.


- TruLumina® 14-Color LED lighting
- Castors: 7% " (23 mm) rollers, 2" (51mm), 3" (77mm), 4" (102mm), 5" (127mm) castors
- G" (153mm) legs
- G" (153mm) seismic legs
- □ Alternative temperature zones available (contact factory)







TOP VIEW

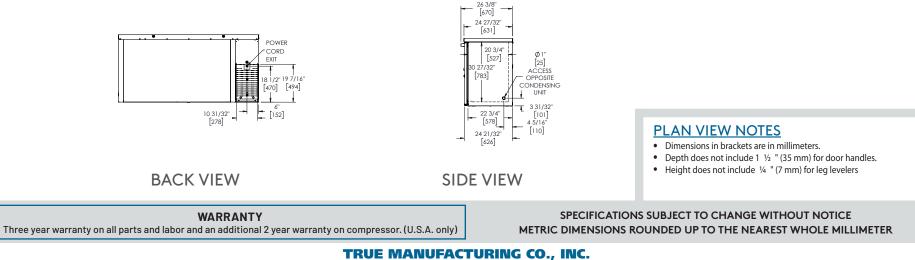

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com