

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project :	
Model #:	
Item #:	Qty:
Available W/H :	
Approval :	

# **Cold Holding Cabinet**

Serving Equipment

**Model: TCR-23D** 

## \_\_\_ FEATURES & BENEFITS =\_\_

### ■ Digital temperature control system

Provides precise and constant temperature. This level of precision allows food products to remain fresh over an extended period of time.

#### High-tech monitor

The monitor digitally displays present cabinet temperatures and setting temperatures at the same time. You can easily change the temperature by adjusting the thermostat.

### ■ LED interior lighting system

Brighter and longer lasting LED lights provide attractive, enhanced illumination compared to fluorescents. It saves energy by producing less heat, while maximizing the visibility.

#### ■ Efficient refrigeration system

Turbo Air's refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

#### Stainless steel cabinet construction

Durable stainless steel cabinet resists corrosion and guarantees the utmost in cleanliness and long product life. It can add a touch of style to the most refined setting.

# Perfect transportation of food at cold temperatures

Turbo Air's Cold Holding Cabinet is perfect in transporting food and beverages while keeping them safe at appropriate holding temperatures. Our full sized, insulated holding cabinet maintains temperatures up to 120 minutes in "power off" mode.

# ■ High-density polyurethane insulation in extra

The entire cabinet structure is foamed-in-place using high density, CFC free, polyurethane insulation in 3" (70mm) extra thickness, providing excellent thermal insulation.

- Safety bumpers provided standard
- Side handles and four swivel casters for improved maneuverability and handling
- Energy conserving system design minimizes compressor usage while keeping constant temperatures





Model	Swing Door	CU./FT.	#of GN Guide	#of GN Pan	HP	AMPS	Crated Weight (lbs.)	L x D x H (inches)
TCR-23D	1	20.48	14(L) / 14(R)	28	1/3	5.5	551	321/4 x 351/4 x 761/4


# **Model: TCR-23D**

ELECTRICAL DATA	TCR-23D				
Voltage	115/60/1				
Plug Type	① NEMA 5-15P				
Full Load Amperes	5.5				
Compressor HP	1/3				
Feed Wires with Ground	3				
Refrigerant	R-134A				
DIMENSIONAL DATA					
# of Door	1 20.48				
Net Capacity (cu. ft.)					
Ext. Length Overall (in.)	321/4 351/4				
Ext. Depth Overall (in.)					
Ext. Height Overall (in.)	761/4				
Int. Length Overall (in.)	231/4				
Int. Depth Overall (in.)	351/4				
Int. Height Overall (in.)	533/4				
Gross Weight (Lbs.)	551				
# of GN Guide	Left : 14 / Right : 14				
GN Pan Size (in.)	1/2" (207/8 x 127/8)				
# of GN Pan	28				


Design and specifications subject to change without notice. Actual shipping weight may differ due to extra packing materials for product protection.

2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor


- Self-contained system
- 4" swivel casters standard
- Door locks standard

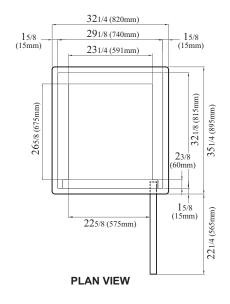

# **PLAN VIEW**

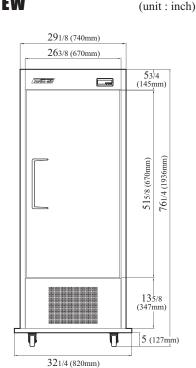

#### **FRONT VIEW**

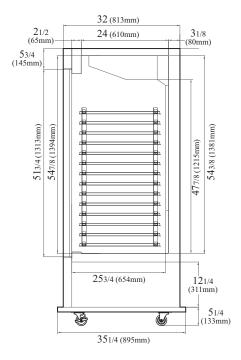

**SIDE VIEW** 

Ver.201501

■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519

■ Warranty: 800-381-7770 ■ AC: 888-900-1002











