

### TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366 (636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name:	AIA #
Location:	
Item #: Qty:	SIS #
Model #:	

# Horizontal Bottle Coolers TD-50-18

# Horizontal Bottle Coolers ☐ TD-24-7, ☐ TD-36-12, ☐ TD-50-18, ☐ TD-65-24, ☐ TD-95-38

True's oversized and balanced refrigeration system with extra large evaporator performs in the hottest, most humid climates. Excellent for all tropical beach bars.

## SPECIFICATIONS / FEATURES

### **CABINET CONSTRUCTION:**

- Durable, non-peel or chip black laminated vinyl exterior.
- All stainless steel countertop and lids.
- Interior long lasting heavy duty galvanized steel. NSF-7 approved for prepackaged and bottled goods.

### DOORS:

· Easy glide stainless steel lid.

### **INSULATION:**

 Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

### **REFRIGERATION SYSTEM:**

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F interior cabinet temperature.
- Evaporator runs length of cooler for efficient balanced cooling, epoxy coated at the time of manufacture to eliminate the potential of corrosion.
- Air vents on side to maximize flow of fresh air through condenser.
- Self-contained system.

### **ELECTRICAL CHARACTERISTICS:**

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



Remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.


Printed in U.S.A.



APPROVALS:

Specifications subject to change without notice.

# TD-Series: Horizontal Bottle Coolers

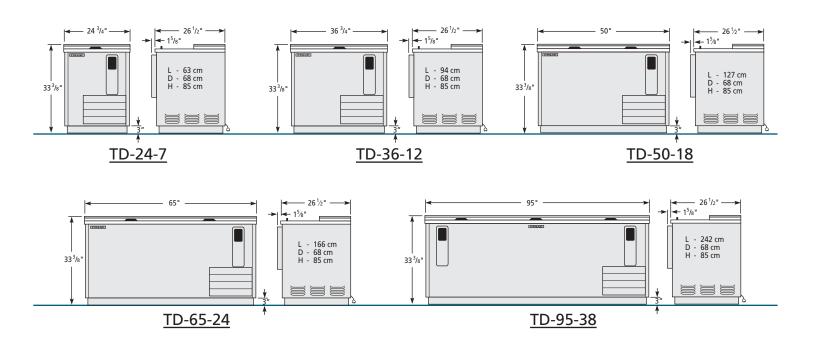

Rough-In Data													
				Dimensions							Cord		
	Type	Capacity	Bin	(inches)						NEMA	Length	Crated	
Model	Unit	(12 oz. btls. / 12 oz. cans)	Dividers	L	D†	Н	HP	Volts	PH	Amps	Config.	(feet)	Weight
TD-24-7	Deep well	4 1/2 cases / 6 cases	2	24 3/4	26 1/2	33 3/8	1/5	115	1	4.1	5-15	7	170
TD-36-12	Deep well	11 cases / 14 1/2 cases	2	36 3/4	26 1/2	33 3/8	1/5	115	1	4.6	5-15	7	210
TD-50-18	Deep well	16 1/2 cases / 24 cases	3	50	26 1/2	33 3/8	1/3	115	1	8.1	5-15	7	250
TD-65-24	Deep well	22 cases / 32 1/2 cases	4	65	26 1/2	33 3/8	1/3	115	1	7.3	5-15	7	290
TD-95-38	Deep well	37 1/2 cases / 55 cases	7	95	26 1/2	33 3/8	1/2	115	1	9.2	5-15	7	420

All models available in stainless steel exterior and low temp models. \* Depth does not include 1 5/8" for cap catcher.

### Specifications subject to change without notice.

### **Standard Features**

- Oversized environmentally friendly (134A) refrigeration system holds 33°F to 38°F.
- Positive guided, forced air cooling cools bottles on top first.
- Stainless steel countertop and lids.
- Aluminum finished back.
- Durable, black laminated vinyl exterior.
- Interior long lasting, heavy duty, galvanized steel. NSF-7 approved for prepackaged and bottled goods
- Huge capacity requires minimum floor space.
- Heavy duty 10 mil thick pure grade vinyl coated adjustable bin dividers.

- Rugged removable bottle cap opener and cap catcher.
- Foamed-in-place high density polyurethane insulation (CFC free).
- Large evaporator coil virtually runs length of cooler for efficient balanced cooling.
- Air vents on side of cooler.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self-contained system.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty (USA).

### **Low Temperature Models Available**

- Oversized environmentally friendly (R404A) refrigeration system.
- Hold 20°F for applications with high ambient temperatures. Designed for alcohol beverages only (note: some low alcohol products freeze below 32°F).

### **Optional Accessories**

- ☐ Optional stainless steel or seismic legs.
- $\square$  2 1/2" or 3" diameter castors.
- Optional ratchet locks.
- ☐ Remote cabinets available, consult factory.



Model	Front	Right	Plan	3D
TD-24-7	TFKY06E	TFKY01S	TFKY06P	TFKY063
TD-36-12	TFKY04E	TFKY01S	TFKY04P	TFKY043
TD-50-18	TFKY03E	TFKY01S	TFKY03P	TFKY033
TD-65-24	TFKY02E	TFKY01S	TFKY02P	TFKY023
TD-95-38	TFKY01E	TFKY01S	TFKY01P	TFKY013



### TRUE FOOD SERVICE EQUIPMENT