



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

24" Back Bar/Direct Draw Beer Dispenser



24" Back Bar/Direct Draw Beer Dispenser

- TDB-24-48,**
- TDB-24-48G,**
- TDB-24-48-1-G-1**

True's oversized and balanced refrigeration system with extra large evaporator performs in the hottest, most humid climates. Excellent for all tropical beach bars.

TDB-24-48-1-G-1

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- 24" depth makes for easy placement in tight areas next to dry cabinetry.
- Durable, non-peel or chip black laminated vinyl exterior. All Stainless steel top.
- Interior - 300 series stainless steel floor with 1/2" lip and heavy galvanized steel walls. NSF-7 approved for prepackaged and bottled goods.
- Bright fluorescent interior lighting for excellent visibility.
- 3" diameter stainless steel beer columns.
- Each cabinet designed to accommodate 1/2 size beer keg.

DOORS:

- Positive seal doors. Door gaskets of one piece construction, and removable for ease in cleaning.
- Solid doors Include 12" long horizontal recessed handle with sheetmetal interlock. Handles foamed-in-place CFC free polyurethane foam.
- Glass doors Include 12" long vertical handle. Energy efficient "Low-E" thermal glass within an extruded aluminum door frame, with reinforcing backing plates in each corner. Glass assembly replaceable without removing the door from hinges.

INSULATION:

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33° to 38°F interior cabinet temperature.
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.
- Air vents on side to maximize flow of fresh air through condenser.
- Condensing unit positioned to allow easy access for maintenance.
- Fan motors direct large volume of cold air into draft columns.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1
NEMA-5-15R

Remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.

Specifications subject to change without notice.

Printed in U.S.A.




APPROVALS:

11/03

Exceptions:



24" TDB-Series: Back Bar / Direct Draw Beer Dispenser

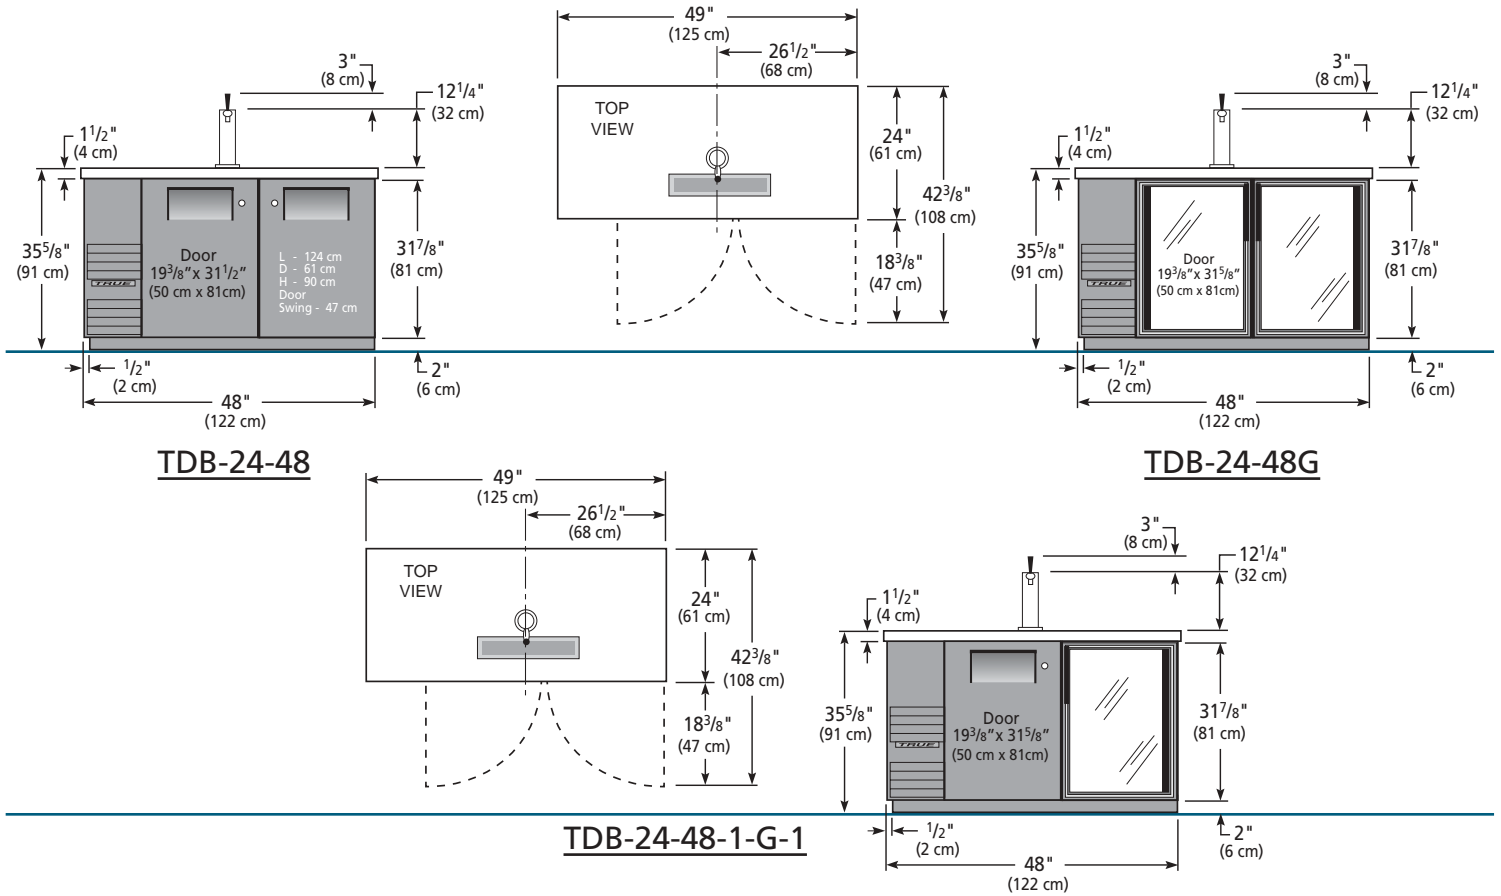

| Rough-In Data | | | | | | | | | | | | | |
|-----------------|-------|------------------------------------|--|------------------------|----|--------|-----|-------|----|------|-----------------|--------------------------|------------------|
| Model | Doors | (left door) 1/2 Size Barrels | (right door) 6-packs 12 oz. cans | Dimensions (inches) | | | HP | Volts | PH | Amps | NEMA Config. | Cord Length (feet) | Crated Weight |
| | | | | L | D† | H* | | | | | | | |
| TDB-24-48 | 2 | 1 | 40.8 | 49 | 24 | 35 5/8 | 1/3 | 115 | 1 | 7.0 | 5-15 | 7 | 270 |
| TDB-24-48G | 2 | 1 | 40.8 | 49 | 24 | 35 5/8 | 1/3 | 115 | 1 | 7.6 | 5-15 | 7 | 295 |
| TDB-24-48-1-G-1 | 2 | 1 | 40.8 | 49 | 24 | 35 5/8 | 1/3 | 115 | 1 | 7.6 | 5-15 | 7 | 290 |

* Height does not include 15 1/4" for draft arm.

† Depth does not include 1 3/8" for door handle (glass door models).

Specifications subject to change without notice.

Standard Features

- Oversized environmentally friendly (134A) refrigeration system maintains cold 33°F to 38°F product temperatures.
- 24" depth makes for easy placement in tight areas. Conserves valuable work space.
- Durable, black laminated vinyl exterior
- Stainless steel top with aluminum back.
- Interior - 300 series stainless steel floor with 1/2" lip & heavy galvanized steel walls. NSF-7 approved for prepackaged and bottled goods.
- 3" diameter insulated stainless steel beer columns.
- 2 heavy duty, 10 mill thick, pure grade vinyl coated wire shelves.
- Positive seal doors.
- Recessed door handles on solid doors.
- Energy efficient "Low-E" thermal glass doors.
- Bright fluorescent interior lighting.
- Door locks standard on solid swing doors.
- Foamed-in-place high density polyurethane insulation (CFC free).
- Air vents on side of cooler.
- Each cabinet designed to accommodate 1/6 size beer kegs.
- Epoxy coated evaporator.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self-contained system.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty (USA).

Optional Accessories

- 2 1/2" or 4" diameter castors.
- Additional shelves.
- Optional organizers.
 - one liter or wine bottle
 - 12 oz. bottle
- Remote cabinets available.

| Model | Front | Right | Plan | 3D |
|-----------------|-----------|-------|------|----|
| | TDB-24-48 | | | |
| TDB-24-48G | | | | |
| TDB-24-48-1-G-1 | | | | |



TRUE FOOD SERVICE EQUIPMENT

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366 • (636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com
Printed in U.S.A.

