



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

TS (Stainless In / Out) Series



TS-49

TRUE, rated the #1 brand in America.

All Stainless Reach-In Refrigerators

- TS-23**, **TS-35**, **TS-49**, **TS-72**

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- 300 series stainless steel interior and exterior.
- Barrel lock standard for each door. Locks keyed alike.
- Solar, digital exterior temperature monitor, large LED display for quick and easy temperature identification.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection. Frame rail fitted with 4" diameter castors, front castors include brakes.

DOORS:

- 300 series stainless steel interior and exterior. Doors extend full width of cabinet shell. Door gaskets of one piece construction, and removable without tools for ease in cleaning.
- Lifetime guaranteed adjustable torsion type closure system with aluminum block supports. The face of each door fitted with a 12" long recessed handle with sheetmetal interlock. Handles are foamed-in-place to insure permanent attachment.

INSULATION:

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- Adjustable vinyl coated wire shelves (3 per door). Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

LIGHTING:

- Incandescent interior lighting. Light(s) activated by rocker switch mounted above door(s).

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F interior cabinet temperature.
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1
NEMA-5-15R

Remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.

Specifications subject to change without notice.

Printed in U.S.A.




APPROVALS:

11/03

Exceptions:



TS-Series: All Stainless Reach-In Refrigerators

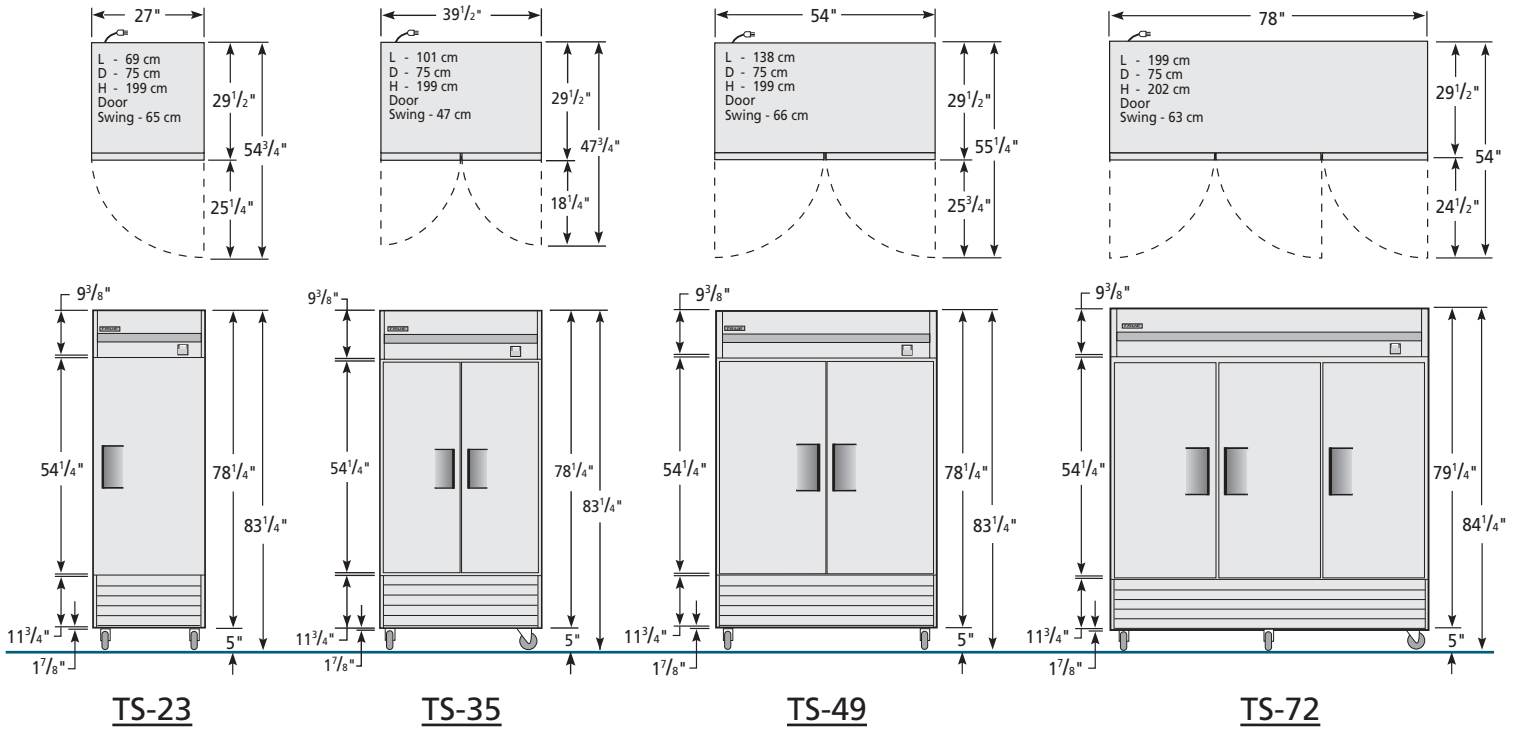

| Rough-In Data | | | | | | | | | | | | | |
|---------------|-------|-------------------|--------------|---------------------|--------|--------|-----|-------|----|------|--------------|--------------------|---------------|
| Model | Doors | Capacity (Cu. Ft) | # of Shelves | Dimensions (inches) | | | HP | Volts | PH | Amps | NEMA Config. | Cord Length (feet) | Crated Weight |
| | | | | L | D | H* | | | | | | | |
| TS-23 (1, 2) | 1 | 23 | 3 | 27 | 29 1/2 | 78 1/4 | 1/3 | 115 | 1 | 7.5 | 5-15 | 9 | 295 |
| TS-35 | 2 | 35 | 6 | 39 1/2 | 29 1/2 | 78 1/4 | 1/2 | 115 | 1 | 9.2 | 5-15 | 9 | 395 |
| TS-49 (1, 2) | 2 | 49 | 6 | 54 | 29 1/2 | 78 1/4 | 1/2 | 115 | 1 | 9.5 | 5-15 | 9 | 455 |
| TS-72 (1, 2) | 3 | 72 | 9 | 78 | 29 1/2 | 79 1/4 | 1/2 | 115 | 1 | 11.8 | 5-15 | 9 | 630 |

(1) Available with full glass doors
 (2) Available with solid half doors, glass half doors & combination solid/glass half doors
 * Height does not include 5" for castors or 6" for optional legs.

Specifications subject to change without notice.

Standard Features

- Oversized and balanced, environmentally friendly (134A) refrigeration system holds 33°F to 38°F.
- 300 series stainless steel interior and exterior.
- Recessed door handles. (lifetime guaranteed)
- Exterior mounted, solar, digital temperature monitor, large LED display for quick and easy temperature identification.
- Door locks standard.
- Magnetic door gaskets.
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Incandescent interior lighting.
- 4" diameter swivel castors standard equipment - locking castors provided for front set.
- Foamed-in-place high density polyurethane insulation (CFC free).

- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self contained system.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty (USA).

Optional Accessories

- 6" stainless steel or optional seismic legs.
- Additional shelves.
- Full and half door bun tray racks.
- Remote cabinets available, consult factory.

| | Model | Front | Right | Plan | 3D |
|--|-------|---------|---------|---------|---------|
| | TS-23 | TFEY83E | TFEY03S | TFEY03P | TFEY033 |
| | TS-35 | | | | |
| | TS-49 | TFEY82E | TFEY02S | TFEY02P | TFEY023 |
| | TS-72 | TFEY81E | TFEY01S | TFEY01P | TFEY013 |

TRUE FOOD SERVICE EQUIPMENT

