

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

D	1	
Projec	۰T	•
	π.	

Model #: Item # :

Qty :

Available W/H :

Approval :

Swing Door Freezers

____ FEATURES & BENEFITS ____

Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

- · Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- · Early Warning Alarm program detects issues before malfunction occurs.
- · Digital display allows for easy monitoring.
- · Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Freeze)
- · Smart defrost system will defrost as needed.
- · Automatic evaporator fan motor delays.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

Individual two cycle refrigeration systems

No electrical cabinet heater is needed

Turbo Air is the first in the industry to replace a frame heater with a method of using compressor-produced heat. This eliminates any unnecessary energy consumption while providing efficient freezing performance.

Shadow free advertising panel

Turbo Air is a pioneer in the refrigerator industry on applying special LED Light Guided Panels (LGP). LGP increases panel visibility and eliminates shadows, enhancing any store atmosphere with eye-catching effects. LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.

High-density polyurethane insulation

Swing

Door

3

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

Triple pane heated glass doors

Equipped with unique triple-pane heated glass doors which enhance energy efficiency by preventing heat transfers and minimizing condensation. Lightweight door construction reduces door maintenance, bushing wear, and facilitates smooth door opening.

LED interior lighting

Model

TGF-72SD-N



Model : TGF-72SD-N



TGF-72SDB-N

Only at Turbo Air, Only in the World

Turbo Air's 2 & 3 Glass Door Freezers are powered by 115V. Not only is our 115V simple and easy to plug in and operate, it also saves customers over \$1,000 in electrical line installation for 220V powered glass door freezers. We are the only company to have achieved this feat, which is proof of our dedication to energy efficiency and the environment.

Freezer holds -10°F ~ 5°F for the best in frozen food preservation



			NATU Refri	verant 🗾 🔤	Prtek Lintertek
 CU./FT.	#of Shelves	HP	AMPS	Crated Weight (1bs.)	$L \ge D^* \ge H^+$ (inches)
60.43	12	2/3 x 2	15.7	915	78 x 317/8 x 77



* Depth does not include 2-1/4" (57mm) for door handle. † Height does not include 2-1/2" (63mm) for leg height.

Swing Door Freezers

(unit : inch)

223/8 (568mm)

Model : TGF-72SD-N

ELECTRICAL DATA			
Voltage	115/60/1		
Plug Type	• NEMA 5-20P		
Full Load Amperes / LRA	15.7 / 34		
Compressor HP	2/3 x 2		
Cord Length (ft.)	7		
Refrigerant	R-290		
DIMENSIONAL DATA	DIMENSIONAL DATA		
# of Doors	3		
Net Capacity (cu. ft.)	60.43		
Ext. Length Overall (in.)	78 (1981mm)		
Ext. Depth Overall (in.)*	317/8 (809mm)		
Ext. Height Overall (in.)†	77 (1956mm)		
Int. Length Overall (in.)	741/2 (1891mm)		
Int. Depth Overall (in.)	277/8 (709mm)		
Int. Height Overall (in.)	611/4 (1556mm)		
Net Weight (lbs.)	818		
Gross Weight (lbs.)	915		
# of Shelves	12		
Shelf Size (L x D) (in.)	223/4 x 233/4 (Left/Right)		
	243/4 x 233/4 (Middle)		

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection. * Depth does not include 2-1/4" (57mm) for door handle. † Height does not include 2-1/2" (63mm) for leg height.

WARRANTY: 3 Year Parts and Labor Warranty Additional 2 Year Warranty on Compressor

STANDARD FEATURES


- Anti-corrosion coated evaporator
- Door locks standard
- Two color options available (standard): Super Deluxe series comes in white cabinet (W), black cabinet with black color trim (B). * Please allow extra lead time for white cabinet with wine color trim.


OPTIONAL ACCESSORIES :

- 4" caster, 1/2" diameter & 13 TPI: G8F6500101 (non-brake), G8F6500201 (w/ brake)
- □ Additional PE coated wire shelf: P0178K0100(Left), P0178K0300(Middle),P0178K0200(Right)
- Price tag channel: P0122K5600 (Left & Right, 21"L), P0122K5400(Middle, 21-1/2"L)

78 (1981mm) 741/2 (1891mm) 223/8 (568mm) 225/8 (575mm) ЯP TOP VIEW

PLAN VIEW



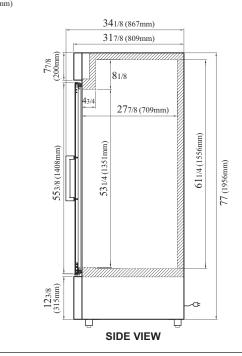

Ver.20190403



(GERMAN)

KNIFE

Turbo Air : 800-627-0032 **GK** : 800-500-3519

Turbo air Texaking

■ Warranty : 800-381-7770 ■ AC : 888-900-1002

