



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

Standard Depth Worktop Units



TWT-48

Standard Depth Worktop Units

- TWT-27,** **TWT-36,**
- TWT-48,** **TWT-60,**
- TWT-72**

True's worktop units feature one piece formed stainless steel backsplash. No bacteria or food particles can be trapped underneath as with other two piece worktop units.

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- Stainless steel front, top and ends. Aluminum finished back.
- White, vinyl coated aluminum interior cabinet liner with 300 series stainless steel floor with coved corners. Construction of liner in accordance with NSF standards.
- 5" diameter stem castors (optional 6" adjustable stainless steel legs available).
- Stainless steel backsplash - one piece formed construction.

DOORS:

- Stainless steel exterior with white aluminum interior to match cabinet liner. Doors extend full width of cabinet shell. Door gaskets of one piece construction, and removable for ease in cleaning.
- Doors include 12" long horizontal recessed handle with sheetmetal interlock. Handles foamed-in-place to insure permanent attachment.

INSULATION:

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- Adjustable vinyl coated wire shelves (2 per door). Shelves capable of supporting up to 250 lbs. (not included in drawered models)
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

Also available:

- **Drawered models**
(hold one 12" x 20" x 6", full size pan per drawer; not included)
- **Freezer models**
- **Deep Worktops (32 1/8" deep)**

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free R134A (refrigerator), R404A (freezer) refrigerant.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33 to 38°F (refrigerator), -10°F (freezer) interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1
NEMA-5-15R

Remote cabinets available 14% off list
(condensing units supplied by others).
Consult factory technical service dept. for BTU information.

Specifications subject to change without notice.

Printed in
U.S.A.




APPROVALS:

2/03

Exceptions:



TWT-Series: Standard Depth Worktop Units

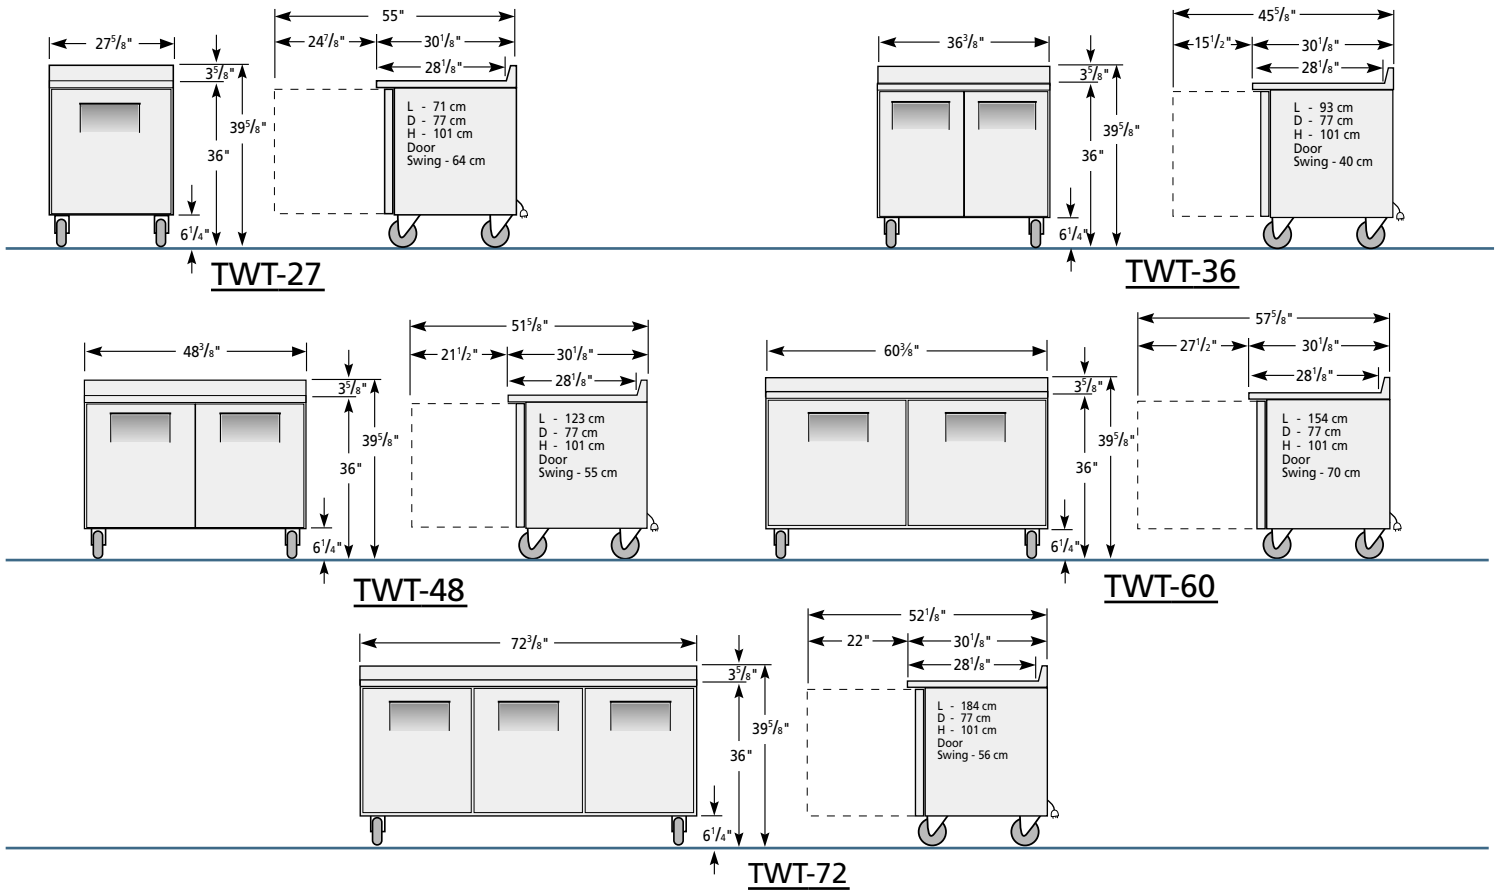

Rough-In Data

Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D	H							
TWT-27 (1, 2)	1	6.5	2	27 5/8	30 1/8	39 5/8	1/5	115	1	4.6	5-15	7	166
TWT-36	2	8.5	4	36 3/8	30 1/8	39 5/8	1/3	115	1	8.3	5-15	7	215
TWT-48 (1, 2)	2	12.0	4	48 3/8	30 1/8	39 5/8	1/3	115	1	8.6	5-15	7	248
TWT-60 (1, 2)	2	15.5	4	60 3/8	30 1/8	39 5/8	1/3	115	1	7.8	5-15	7	292
TWT-72	3	19.0	6	72 3/8	30 1/8	39 5/8	1/2	115	1	10.5	5-15	7	355

- (1) Available in drawered model
- (2) Available in freezer model

Specifications subject to change without notice.

Standard Features

- Oversized and balanced, environmentally friendly refrigeration system - holds 33°F to 38°F (134A, refrigerator), -10°F (R404A, freezer).
- Stainless steel front, top and sides.
- Interior - NSF approved, white vinyl coated aluminum sides and top, coved corners and 300 series stainless steel floor.
- Front breathing.
- Work surface 36" high.
- Recessed handles.
- One piece formed construction stainless steel backsplash.
- Door swings within cabinet dimensions.
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Aluminum finished back.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self-contained system.
- Foamed-in-place high density polyurethane insulation (CFC free).
- Door/drawer variations available at full drawer list pricing.

- 5" diameter castors standard equipment.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.

Optional Accessories

- Cutting board
- 6" stainless steel or optional seismic legs.
- 2 1/2" diameter castors available.
- Low profile models with 2" castor package. 31 1/2" work surface height (available for TWT-27,-36,-48,-60 refrigerators). ADA compliant.
- Heavy, 16 gauge tops available.
- Basic overshef available for TWT-27,-48,-60.
- Service shelf available for TWT-48,-60,-72.

Model	Front	Right	Plan	3D
TWT-27	TFPY01E	TFPY01S	TFPY01P	TFPY013
TWT-36	TFPY03E	TFPY03S	TFPY03P	TFPY033
TWT-48	TFPY02E	TFPY02S	TFPY02P	TFPY023
TWT-60	TFPY03E	TFPY03S	TFPY03P	TFPY033
TWT-72	TFPY04E	TFPY04S	TFPY04P	TFPY043

Clearance Required For Coolers (USA)

Sides Inches/mm	Top Inches/mm	Rear Inches/mm
0 / 0	0 / 0	1 / 26



TRUE FOOD SERVICE EQUIPMENT