



EKFA 412 S1 (120v)

FOUR-TRAY, HALF-SIZE COUNTERTOP
CONVECTION OVEN, MANUAL CONTROLS

FEATURES



Maximum cooking capacity in a small space
Lateral supports for 4 trays at 2 ²⁹/₃₂" pitch
(4) 13" x 18" grids included
Temperature range 200 to 500° F
Stainless-steel cooking chamber
Bottom control panel - manual
Mono-directional fan
High-performance oven insulation
High-efficiency motor and fan
Recessed door gasket
Bottom-hinged, dual-paned glass door
Internal glass designed to facilitate easy cleaning
Timed or infinite cooking mode
Internal halogen light

Conforms to the following standards:

- Standard safety UL 197-2014
- Sanitation NSF / ANSI 4-2014
- Sanitation NSF / ANSI 170-2010
- Sanitation NSF / ANSI 51-2012
- CSAC 22.2 No. 109-M1981



Tecnoeka, Inc.
3385 Denver Drive
Denver, North Carolina 28037

Web Site: www.tecnoeka.com
E-mail: info.usa@tecnoeka.com
Toll Free: 888-626-EKA1 (3521)



Printed in the U.S.A.
March 2021

EKFA 412 S1 (120v)

DIMENSIONS NET AS SHIPPED

Width	23.62 in	30 in
Depth	27.91 in	26 in
Height	23.97 in	23 in
Weight	79 lb	88 lb

UTILITY CONNECTIONS


All utility connections should be within three feet of the centerline of the back of the oven when installed.

ELECTRICAL

Power:	1700W
Frequency:	60Hz
Voltage (AC):	120v
Current:	14.5A
NEMA Plug:	5-20P (included)
Breaker size:	20A (recommended)

AVAILABLE OPTIONS AND ACCESSORIES

Table - standard height (31.14")	EKTAS 412
Table - w/casters (34.76")	EKTARS 412
13" x 18" half-size chrome grid	EKGAHS
13" x 18" half-size stainless-steel grid	EKGAHSX

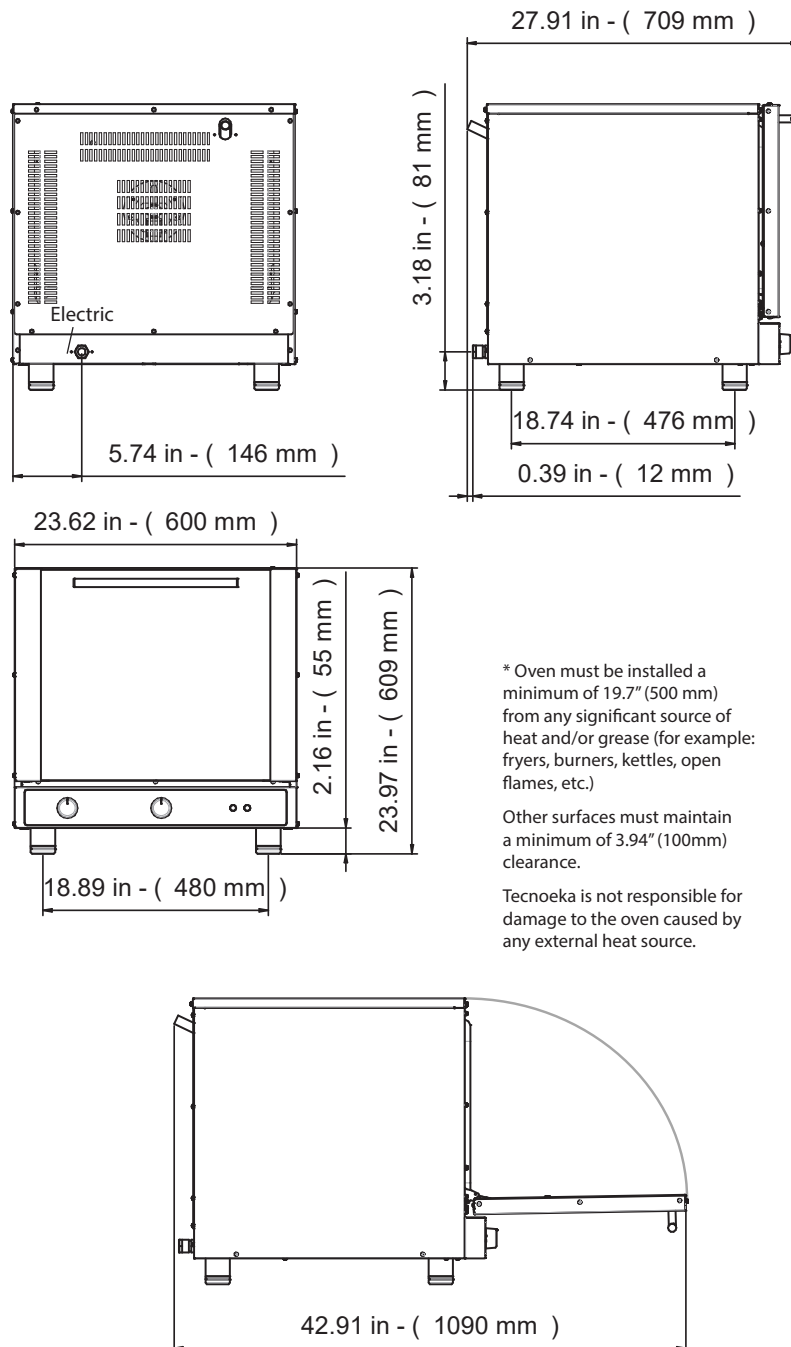

Tecnoeka, Inc.
3385 Denver Drive
Denver, North Carolina 28037

Web Site: www.tecnoeka.com
E-mail: info.usa@tecnoeka.com
Toll Free: 888-626-EKA1 (3521)



Printed in the U.S.A.
March 2021