



EKFA 414 S

FOUR-TRAY, QUARTER-SIZE COUNTERTOP
CONVECTION OVEN, MANUAL CONTROLS

FEATURES



Maximum cooking capacity in a small space
Lateral supports for 4 trays at 1 $\frac{3}{32}$ " pitch
(4) 13" x 9" grids included
Temperature range 200 to 500° F
Stainless-steel cooking chamber
Bottom control panel - manual
Mono-directional fan
High-performance oven insulation
High-efficiency motor and fan
Recessed door gasket
Bottom-hinged, dual-paned glass door
Internal glass designed to facilitate easy cleaning
Timed or infinite cooking mode
Internal halogen light

Conforms to the following standards:

- Standard safety UL 197-2014
- Sanitation NSF / ANSI 4-2014
- Sanitation NSF / ANSI 170-2010
- Sanitation NSF / ANSI 51-2012
- CSAC 22.2 No. 109-M1981



Tecnoeka, Inc.
3385 Denver Drive
Denver, North Carolina 28037

Web Site: www.tecnoeka.com
E-mail: info.usa@tecnoeka.com
Toll Free: 888-626-EKA1 (3521)



Printed in the U.S.A.
March 2021

EKFA 414 S

DIMENSIONS NET AS SHIPPED



Width	18.11 in	22 in
Depth	20.22 in	24 in
Height	18.94 in	18 in
Weight	48 lb	55 lb

UTILITY CONNECTIONS

All utility connections should be within three feet of the centerline of the back of the oven when installed.

ELECTRICAL


Power:	1700W
Frequency:	60Hz
Voltage (AC):	120v
Current:	14.5A
NEMA Plug:	5-20P (included)
Breaker size:	20A (recommended)

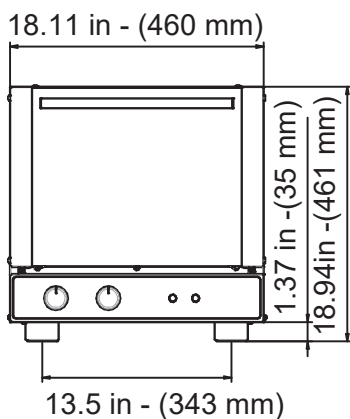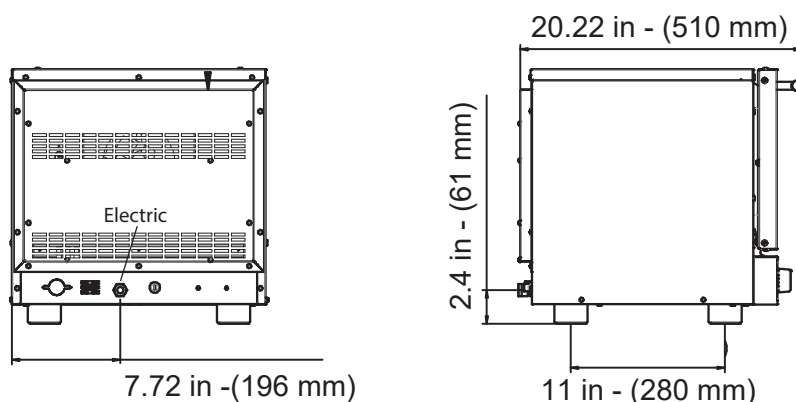

* Oven must be installed a minimum of 19.7" (500 mm) from any significant source of heat and/or grease (for example: fryers, burners, kettles, open flames, etc.)

Other surfaces must maintain a minimum of 3.94" (100mm) clearance.

Tecnoeka is not responsible for damage to the oven caused by any external heat source.

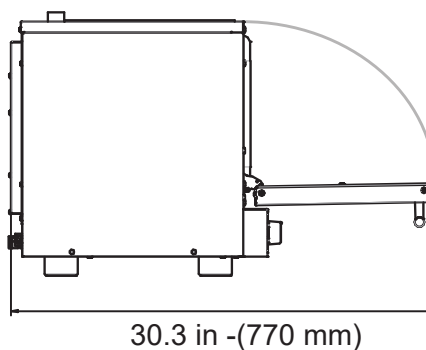

AVAILABLE OPTIONS AND ACCESSORIES

Tecnoeka, Inc.
3385 Denver Drive
Denver, North Carolina 28037

Web Site: www.tecnoeka.com
E-mail: info.usa@tecnoeka.com
Toll Free: 888-626-EKA1 (3521)



Printed in the U.S.A.
March 2021