


Trough Collector™

Model S419 HOW IT WORKS

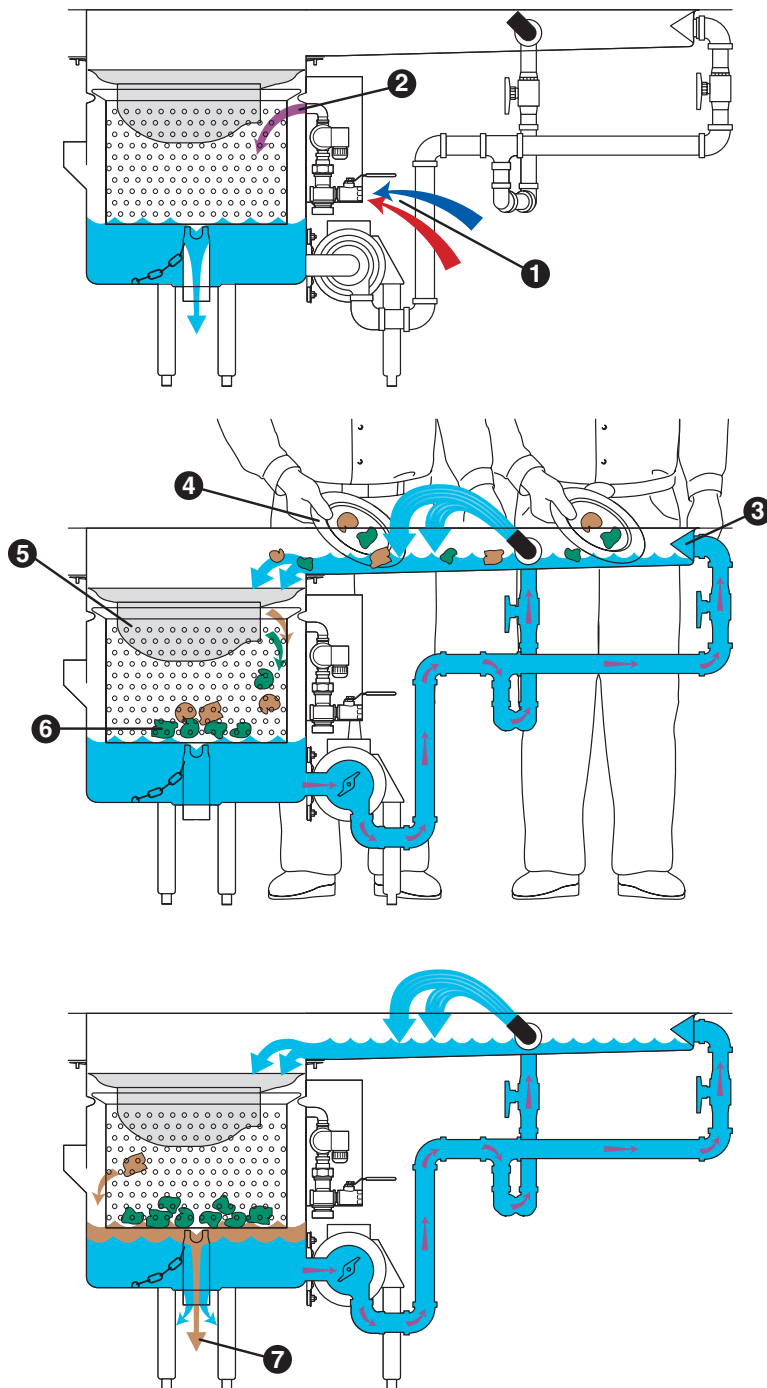

- ❶ Hot and cold water pass through a water blender set at 107° F.
- ❷ The blended water enters the tank reservoir at the rate of 2 gallons per minute.
- ❸ The Collector pump recirculates water down the trough.
- ❹ Dishes are scrapped into the trough by hand or passed through the water plume coming from the rubber gusher heads (optional).
- ❺ Food waste is carried through the basin and into the scrap basket.
- ❻ Soluble food waste washes through the holes in the scrap basket into the tank reservoir. Insoluble and fibrous waste is retained in the scrap basket.
- ❼ Excess waste water flows into the drain.

SALVAJOR® Manufacturers of Commercial Food Waste Solutions - *Since 1944*

4530 East 75th Terrace Kansas City, MO 64132-2081, USA

816.363.1030 | Toll Free: 1.800.725.8256 | Service: 1.888.725.8256 | Fax: 1.800.832.9373

sales@salvajor.com | service@salvajor.com | www.salvajor.com

Printed in USA
HOW-S419 (04-18)