

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

Swing Door Merchandisers

Glass Door Merchandisers
 Refrigerator

FEATURES & BENEFITS

Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Low-emissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

LED interior lighting

Adjustable PE (polyethylene) coated wire shelves

Refrigerator holds 33°F ~ 38°F for the best in food preservation



TGM-10W-N6



TGM-10B-N6

NATURAL
 Refrigerant




Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
TGM-10W(B)-N6	1	8.93	3	1/4	2.6	212	26 3/8 x 25 x 55 3/8

Swing Door Merchandisers

Reach-In Top Mount
Refrigerator

Model: TGM-10W(B)-N6

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	2.6
Compressor HP	1/4
Cord Length (ft.)	7
Refrigerant	R-600a
DIMENSIONAL DATA	
# of Doors	1
Net Capacity (cu. ft.)	8.93
Ext. Length Overall (in.)	26 3/8 (670mm)
Ext. Depth Overall (in.)*	25 (635mm)
Ext. Height Overall (in.)†	55 3/8 (1408mm)
Int. Length Overall (in.)	22 (560mm)
Int. Depth Overall (in.)	20 1/4 (515mm)
Int. Height Overall (in.)	34 1/2 (876mm)
# of Shelves	3
Shelf Size (L x D) (in.)	20 5/8 x 16
Bottle Capacity (12oz.)	205
Net Weight (lbs.)	179
Gross Weight (lbs.)	212

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-5/8" for door handle.

† Height does not include 2-5/8" for caster height.

■ WARRANTY : 2 Year Parts and Labor Warranty 5 Year Compressor Warranty

■ STANDARD FEATURES

- Anti-corrosion coated evaporator
- Adjustable foot (leg bolt) on the front set
- 2" dia. casters with non-brake on the rear set
- Two color options available: white cabinet (W), black cabinet (B).


■ OPTIONAL ACCESSORIES

- 2" dia. swivel plate mount caster: X23G3220-010 (non-brake), X23G32220020 (w/ brake)
- Additional PE coated wire shelf: X15G8360-011


Ver.20251030

PLAN VIEW


(unit : inch)

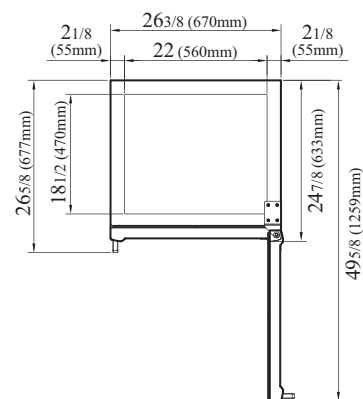

TOP VIEW

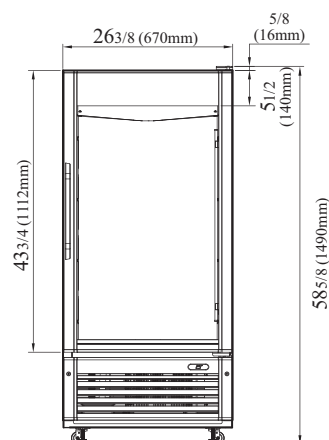

FRONT VIEW

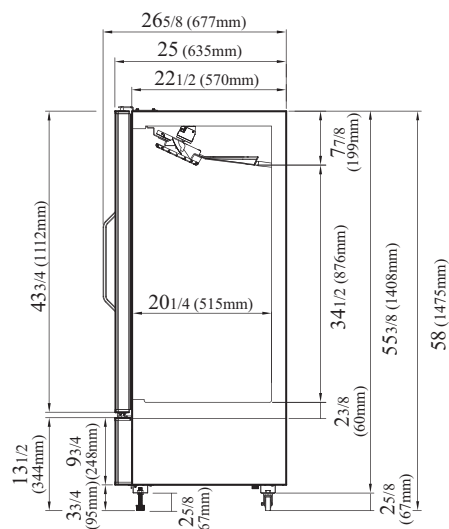

SIDE VIEW



- Turbo Air: 800-627-0032
- Bake Tech : 800-500-3519
- Warranty: 800-381-7770
- AC: 888-900-1002