



## 23 cu ft Refrigerator, Reach-In


CRE427: Refrigerator, Reach-In




Features and Specifications			
Volume of 23 cu ft			
AISI 441 stainless steel interior and exterior with lock			
Temperature range: 28°F to 46°F			
Electronic digital temperature control with alarms			
Autodefrost			
High efficiency compressor, top mount, with 3.8 running amps			
High efficiency evaporator coil & condenser			
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design			
CFC-free high-density polyurethane insulated cabinet			
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P			
Environmentally friendly R290 refrigerant - 3.2 oz (0.090kg)			
1 section, includes 3 epoxy coated wire shelves			
Dimensions: 80 <sup>23</sup> / <sub>32</sub> " H x 27 <sup>9</sup> / <sub>16</sub> " W x 31 <sup>1</sup> / <sub>2</sub> " D			
4 adjustable legs			
Model Details			
Model	Description	Voltage/Hz	Shipping Weight
UCRE427-SS01A	Refrigerator, Reach-In, Field Reversible Hinge	115v / 60hz	287 lb
Accessories			
Model	Description		Shipping Weight
ULA4080584	Shelf Guide		.88 lb
ULAQ32-0002	Epoxy Coated Wire Shelf (20.86" x 25.6")		2.2 lb
ULA89020410	Adjustable Leg kit		11.02 lb
ULA89010340	0340 Caster Kit		13.22 lb
ULA80010380	Door Lock Kit		2.2 lb
ULA80110300	Light Kit		2.2 lb



## Front (Open)

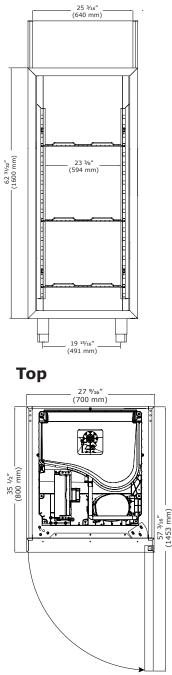

## Front (Closed)

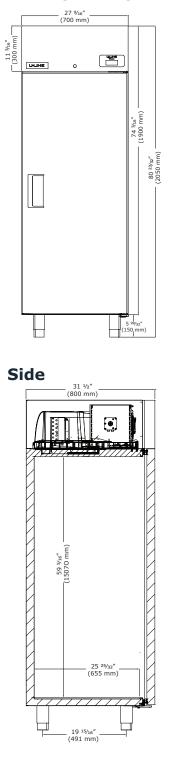

## **Commercial Warranty**

1 Year (parts & labor) / 5 year sealed system (parts) See complete warranty for details



THE MIDDLEBY CORPORATION

u-line.com • +1.414.354.0300 • sales@u-line.com f ♥ @ ▷ in @ h

Please visit u-line.com to view User Guides & Service Manuals. All specifications are subject to change without notice.