

## **Product Specifications**

## 72 cu ft Freezers, Reach-In

CFZ585-SS: Solid Door Freezer, Reach-In CFZ585-SG: Glass Door Freezer, Reach-In





CFZ585-SG


Features and Specifications				
Volume of 72 cu ft				
AISI 304 stainless steel interior and exterior with locks				
Temperature range: -13°F to 14°F				
Electronic digital temperature control with alarms				
Autodefrost				
High efficiency compressor with 20 running amps				
High efficiency evaporator coil & condenser				
Self-lubricating, sealed cast iron evaporator fan motor with high volume air flow design				
Removable magnetic gasket for easy cleaning				
CFC-free high-density polyurethane insulated cabinet				
Factory pre-wired for dedicated outlet, 11 ft. cord and plug included NEMA 5-20P				
Environmentally friendly R290 refrigerant - 2 x 3.5 oz (2 x 0.100kg)				
3 sections, includes 9 epoxy coated wire shelves				
Dimensions: 83 <sup>15</sup> / <sub>32</sub> " H x 85 <sup>3</sup> / <sub>64</sub> " W x 31 <sup>15</sup> / <sub>32</sub> " D				
LED lighting				
8 Adjustable stainless steel legs				

Model Details				
Model	Description	Voltage/Hz	Shipping Weight	
UCFZ585-SS71A	72 cu ft Freezer Solid Door, Reach-In	115v / 60hz	650 lb	
UCFZ585-SG71A	72 cu ft Freezer Glass Door, Reach-In	115v / 60hz	750 lb	
Accessories				
Model	Description		Shipping Weight	
ULA4080584	Shelf Guide		.88 lb	
ULAQ32-0002	Epoxy Coated Wire Shelf (20.86" x 25.6")		2.2 lb	
ULA89010360	Caster Kit (8 casters, 2 with brakes)		13.22 lb	



## Front (Closed - Solid Door)

Front (Open)

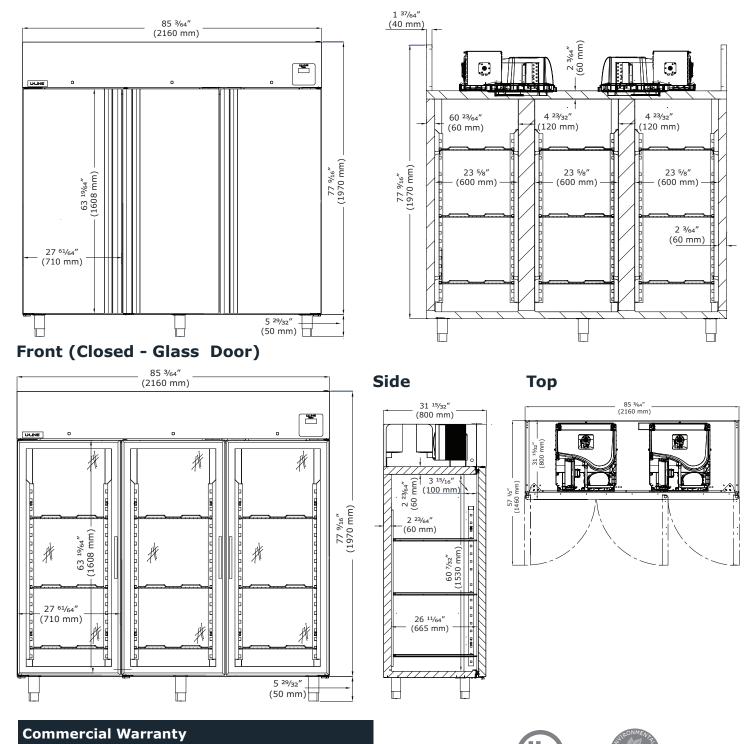

1 Year (parts & labor) / 5 year sealed system (parts) See complete warranty for details

u-line.com • +1.414.354.0300 • sales@u-line.com

THE MIDDLEBY CORPORATION

Please visit u-line.com to view User Guides & Service Manuals. All specifications are subject to change without notice.

f 🕑 🖸 🖬 in 🖗 h