



48 cu ft Refrigerator, Reach-In

CRE455: Refrigerator, Reach-In




Features and Sp	ecifications		
Volume of 48 cu ft			
	eel interior and exterior with locks		
Temperature range:			
	pperature control with alarms		
Autodefrost	,		
High efficiency comp	pressor, top mount, with 6.4 running amps		
	prator coil & condenser		
Self-lubricating, seal	ed cast iron evaporator fan motor with high	volume airflow design	
	y polyurethane insulated cabinet		
Factory pre-wired for	r dedicated outlet, 11 ft cord and plug includ	ded NEMA 5-15P	
Environmentally frier	ndly R290 refrigerant - 3.5 oz (0.100kg)		
2 sections, includes	6 epoxy coated wire shelves		
Dimensions: 80 23/32	"H x 55 ¼8"W x 31 ¼2"D		
4 adjustable legs			
Model Details			
Model	Description	Voltage/Hz/Phase	Shipping Weight
UCRE455-SS71A	Refrigerator, Reach-In	115v / 60hz / 1	396 lb
Accessories			
Model	Description		Shipping Weight
ULA4080584	Shelf Guide		.88 lb
ULAQ32-0002	Epoxy Coated Wire Shelf (20.86" x 25.6")		2.2 lb
ULA89030400	Adjustable Leg kit		11.02 lb
ULA81040300	Caster Kit		11.02 lb
ULA80010380	Door Lock Kit		2.2 lb
ULA80110300	Light Kit		2.2 lb




Front (Closed)


Front (Open)

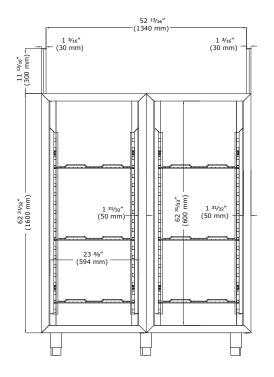

Тор



25 ½%" (1400 mm) (1400 mm) (1400 mm) (120 mm) (120 mm) (1300 mm) (

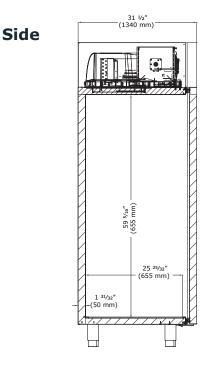

Commercial Warranty

1 Year (parts & labor) / 5 year sealed system (parts) See complete warranty for details



THE MIDDLEBY CORPORATION

u-line.com • +1.414.354.0300 • sales@u-line.com f ⊻ @ ▷ in @ h

Please visit u-line.com to view User Guides & Service Manuals. All specifications are subject to change without notice.