

G-60 GRIDDLE

G-60 GRIDDLE



Wells G-60 Griddle is ideal for any commercial kitchen based on its versatile, easy-to-use design. In addition to the standard griddle surface there are two options to choose from, grooved or chrome-plated. The eight positive-off thermostats allow individual zone control. The grease drawers are easily removable for cleaning.

Specifications

Overall Dimensions:	Inches	MM
Width	69	1753
Depth	29 9/16	751
Height	16	406
<small>(incl. 4" legs & splashguard)</small>		
Griddle Surface Dimensions:		
Width	66 7/8	1699
Depth	24 5/16	633
Area	1626 in ²	1.05 m ²
Temperature Range:	Fahrenheit	Celsius
G-60	200° to 450°	93° to 232°
Number of Thermostats:	8	
Pre-Heat Time to 400° F:	9 minutes	
Watts Per Hour to Maintain 400° F:	4,400	
Typical Production:	Per Load	Per Hour
Hamburgers	130	1950
Steaks	48	576
Pancakes*	96	1344
Eggs*	112	2016
<small>* Not applicable to grooved surface</small>		
Weights:	Lbs.	KG
Installed	420	191
Shipping	545	247

Features

- **Each individual positive-off thermostat** controls one-eighth of the cooking surface.
- **Enclosed tubular elements** are clamped onto the one-half inch thick griddle plate to provide even heat distribution over the entire surface.
- **Removable splashguard** makes clean-up easier.
- **Each removable front-grease drawer** has a four-quart capacity.
- **Controls** are front-mounted with a protective guard ring to help prevent accidental temperature changes.
- **Two terminal blocks** are provided for field wiring connections to the main power supply.
- **The G-60 Griddle** is Underwriters Laboratories, Inc. LISTED and meets NSF International standards.
- **A one-year warranty** against defects covers parts and labor.

Accessories / Options

Chrome-plated griddle surface, allows more efficient heat transfer throughout the cooking area, available by special order.

Grooved griddle surface, 3/4-inch thick ribbed steel plate that allows for the "branding" of meat products, available by special order.





LISTED
E6070




STD.4

**MODEL
G-60
GRIDDLE**

DIMENSIONS: $\frac{\text{INCH}}{\text{(MM)}}$

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE		
BACK	SIDE	BOTTOM
$\frac{1}{(25)}$	$\frac{1}{(25)}$	$\frac{4}{(102)}$

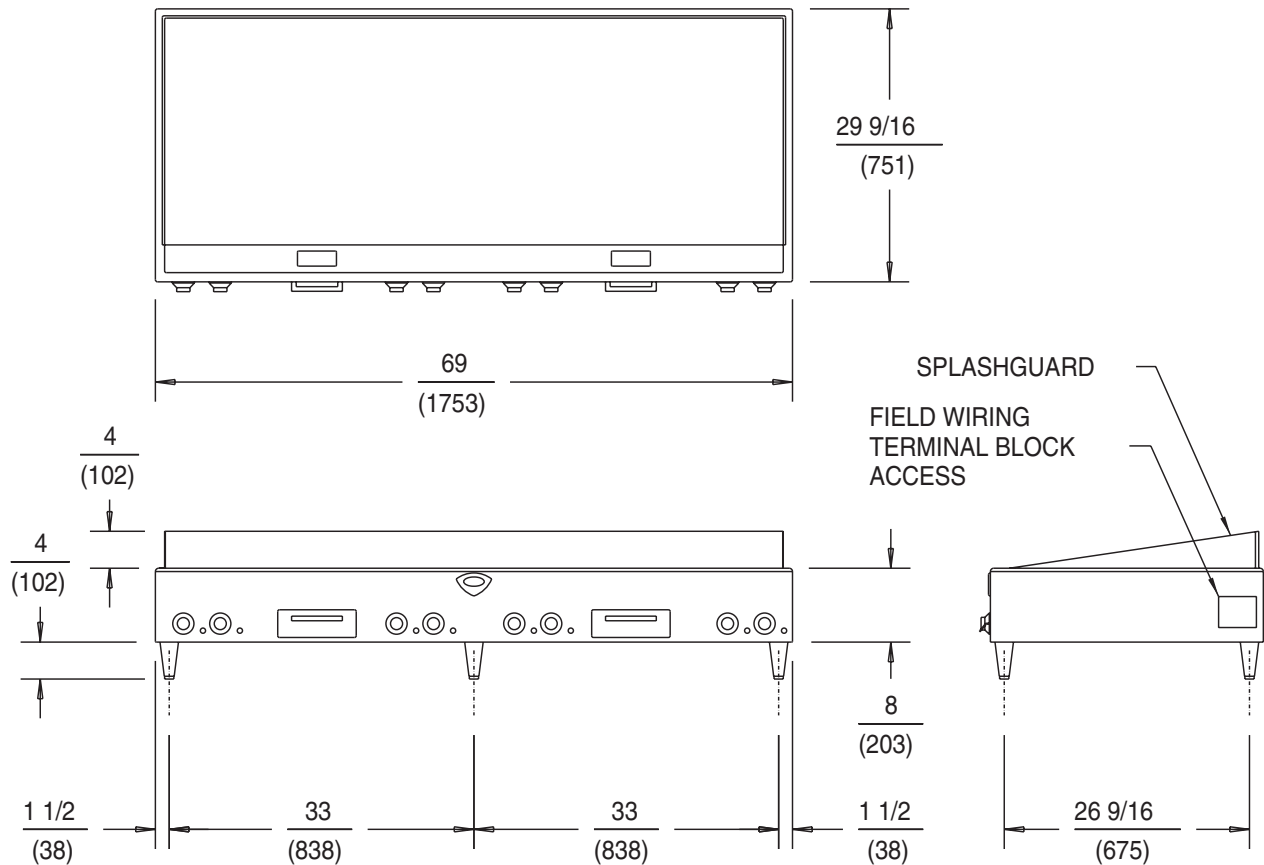

G-60 ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE 3 PHASE			AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3		
G-60	208	16000x2	48.3	51.3	35.0	76.9	NONE
G-60	240	16000x2	41.7	44.4	30.4	66.6	NONE
G-60	480	16000x2	20.9	22.0	15.1	33.3	NONE

NOTE: Specifications are subject to change without notice. 208 and 240 volt griddles have two separate supply connections, electrical specifications shown in chart are for one supply connection (one-half of griddle).

WELLS MANUFACTURING COMPANY
 2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A.
 USA PHONE: (775) 689-5700 • FAX: (775) 689-5972
 FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142
 www.wells-mfg.com
 © 2002 WELLS MANUFACTURING • PRINTED IN THE U.S.A.
 01/02 • REV(F) • PART NO. 38858

