

HOSHIZAKI

AM-50BAE(-AD)
Item # 13158 4/04


AM-50BAE(-AD) SERIES

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN




AM-50BAE

AM-50BAE
Air-Cooled
AM-50BAE-AD*
Air-Cooled
*ADA Compliant unit



AM-50BAE



AM-50BAE-AD

DIMENSION	
Width x Depth x Height	
AM-50BAE	14 7/8 x 22 5/8 x 33 1/2"
AM-50BAE-AD	14 7/8 x 22 5/8 x 31 1/2"

AM-50BAE


- Undercounter design is less than 34 inches tall

AM-50BAE-AD

- Undercounter design is less than 32 inches tall, which complies with the Americans with Disabilities Act (ADA)

AM-50BAE & AM-50BAE-AD

- Up to 55 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- UL approval for outdoor use
- Up to 27 lbs. of built-in storage capacity
- Power switch accessible without panel removal
- Easily disassembled water circuit for easy cleaning
- Front in, front out airflow
- Fewer moving parts for longer life
- Swing style reversible door
- Optional drain pump

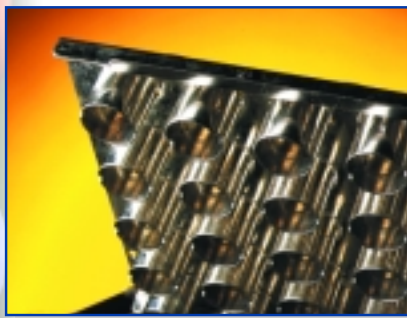

Open cell evaporator

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325


www.hoshizaki.com



Reliability is a beautiful thing™

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

AM-50BAE (AIR-COOLED)
AM-50BAE-AD (AIR-COOLED)



- **AM-50BAE(-AD)** - Up to 55 lbs. of ice production per 24 hours
- 27 lbs. of built-in storage capacity




WARRANTY TWO YEAR - Parts & Labor on entire machine.	R-134a REFRIGERANT
--	---------------------------

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.


STORAGE BINS		UTILITY CONSUMPTION					
Up to 27 lb. Capacity Built-in Bin		Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gallons per 100 lbs.	Condenser Water Gallons per 100 lbs.
OPERATING LIMITS		AM-50BAE(-AD)	Lbs.	Cubes	9.9	53.7	NA
Ambient Temp Range 45 - 100°F		SPECIFICATIONS					
Water Temp Range 45 - 95°F		Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight	
Voltage Range 104 - 127V		AM-50BAE(-AD)	Air-Cooled	3.4	15	99 lbs.*	
Water Pressure 7 - 113 psig		Requires 3/8" Flare fitting (Included)					
AIR - COOLED							
Water Temp ° F. - 50°	55 Lbs.						
Air Temp ° F. - 70°							

Optional: Auxiliary Drain Pump


*Without pallet

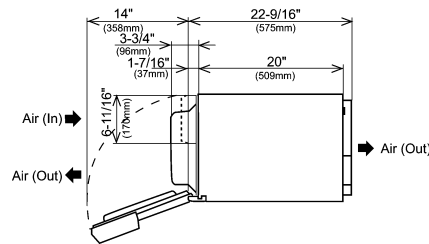


TOP DIMENSIONS

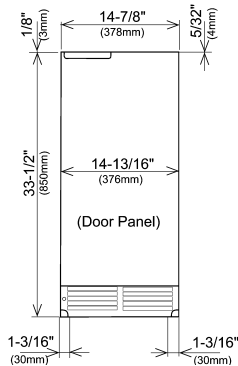


FRONT DIMENSIONS

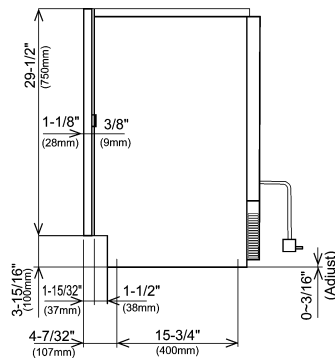


SIDE DIMENSIONS

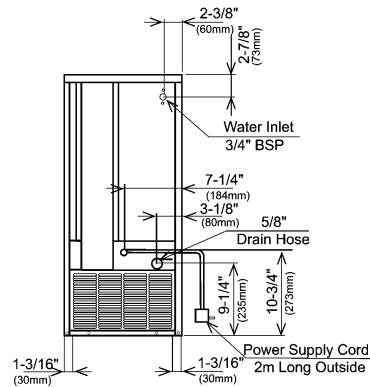


BACK DIMENSIONS

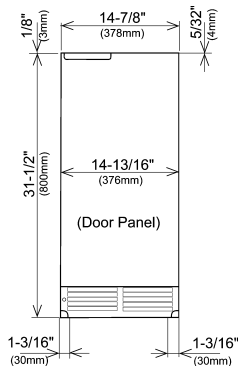

FRONT DIMENSIONS
(ADA compliant unit)

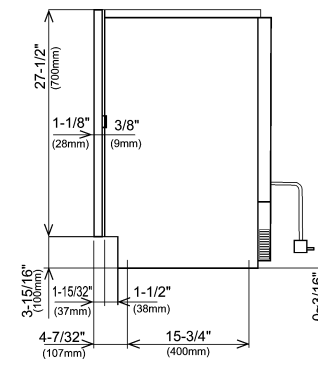

SIDE DIMENSIONS
(ADA compliant unit)

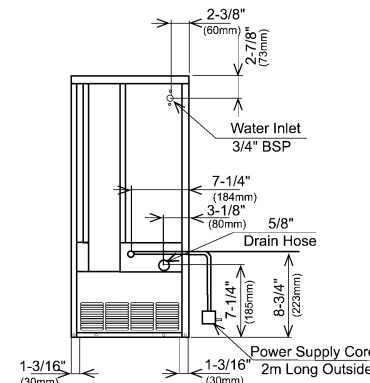

BACK DIMENSIONS
(ADA compliant unit)