

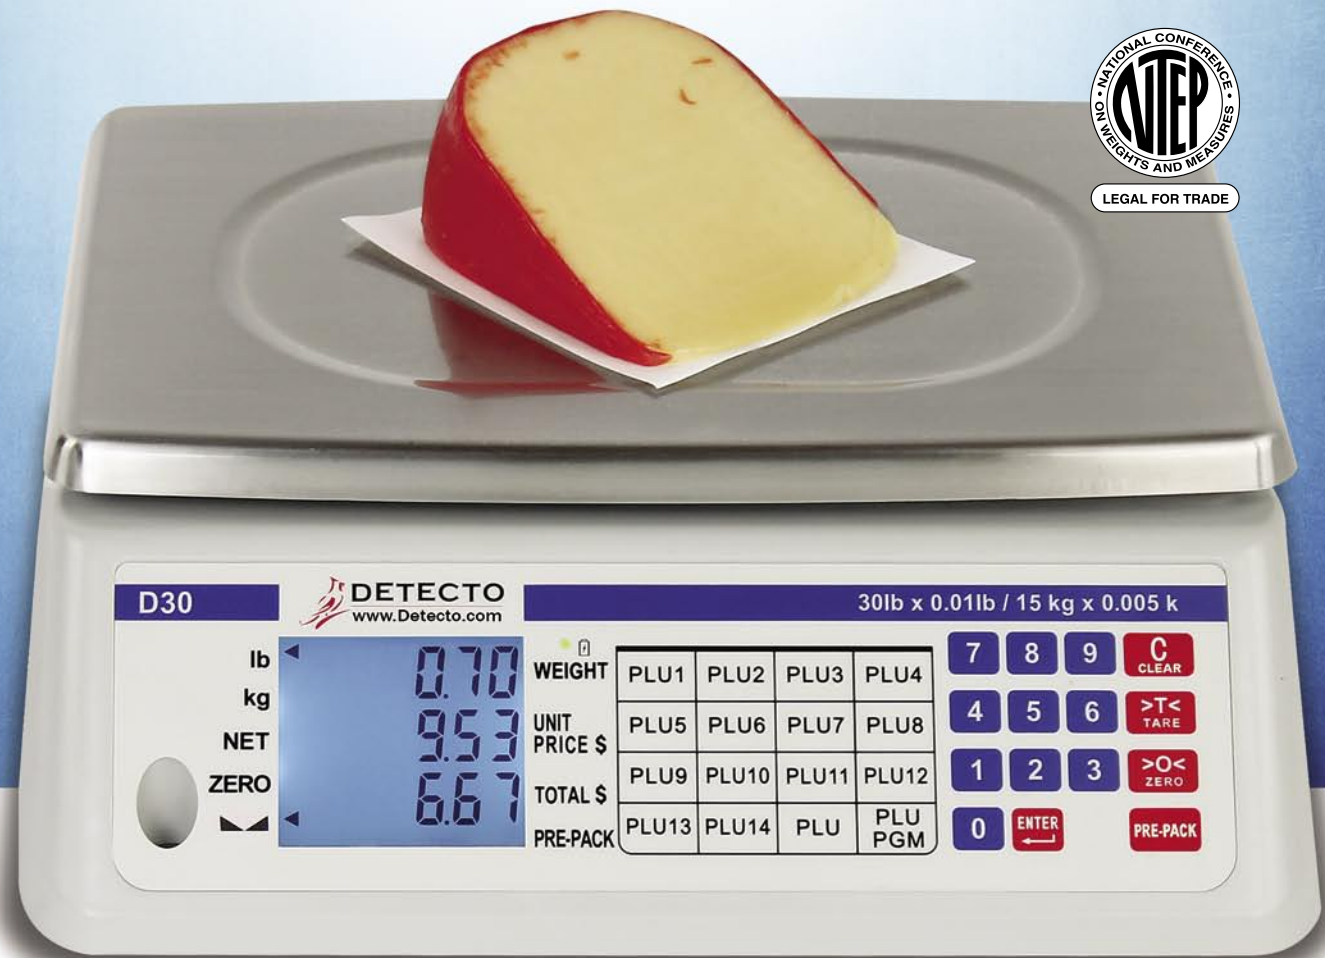


# D series Price Computing SCALES

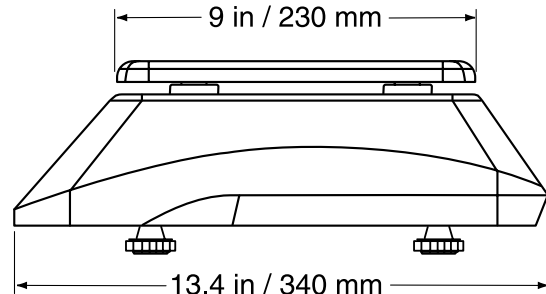

- Up to 99 Easy-to-Add PLUs for Quick Reference (14 direct and 85 indirect)
- Displays Weight, Unit Price, and Total Price with Operator and Customer Views
- Built-in Rechargeable Battery Pack and AC Adapter Included
- NTEP Legal for Commercial Trade - Accuracy Class III

# D series Price Computing SCALES

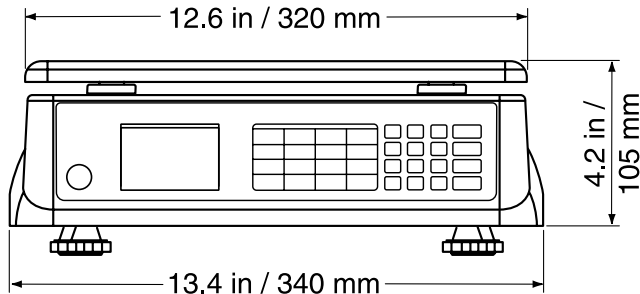

| Model                        | D15   | D30                                   | D60                                  |
|------------------------------|---|---------------------------------------|--------------------------------------|
| <b>Capacity / Divisions</b>  | 15 lb x 0.005 lb /<br>6 kg x 0.002 kg   | 30 lb x 0.01 lb /<br>15 kg x 0.005 kg | 60 lb x 0.02 lb /<br>30 kg x 0.01 kg |
| <b>UPC Code</b>              | 809161190403  | 809161190502                          | 809161190601                         |
| <b>Display</b>               | 0.5-in/13-mm high, 7-segment LCD with backlight<br>Weight: 6 digits<br>Unit Weight: 6 digits<br>Total Price: 6 digits |                                       |                                      |
| <b>Power</b>                 | 12 VDC 1.0A rechargeable battery pack (included) or AC adapter 110/120 VAC 50/60 Hz (included)                        |                                       |                                      |
| <b>Battery Operation</b>     | 120 working hours of continuous use without backlight turned on / 60 hours with backlight turned on                   |                                       |                                      |
| <b>Leveling Components</b>   | 4 adjustable rubber feet and integral front-mounted level bubble indicator  |                                       |                                      |
| <b>PLU</b>                   | Up to 99 Price Look Ups (14 direct quick keys and 85 indirect)  |                                       |                                      |
| <b>Zero</b>                  | Established on power up routine and maintained by auto-zero circuitry   |                                       |                                      |
| <b>Tare</b>                  | 100% of full scale capacity   |                                       |                                      |
| <b>Operating Temperature</b> | 14° to 104° F (-10° to +40° C)  |                                       |                                      |
| <b>Storage Temperature</b>   | -13° to 122° F (-25° to +50° C)   |                                       |                                      |
| <b>Scale Construction</b>    | High-grade molded polymer   |                                       |                                      |
| <b>Platform Construction</b> | Stainless steel   |                                       |                                      |
| <b>Product Weight</b>        | 7.9 lb / 3.6 kg   |                                       |                                      |
| <b>Shipping Weight</b>       | 11.4 lb / 5.2 kg  |                                       |                                      |
| <b>NTEP</b>                  | Certificate of Conformance No. 13-058   |                                       |                                      |
| <b>Accuracy Class</b>        | III   |                                       |                                      |

*Detecto Scale reserves the right to improve, enhance, or modify features and specifications without prior notice.*



**DETECTO**<sup>®</sup>  
A Division of Cardinal Scale Manufacturing Co.  
203 E. Daugherty, Webb City, MO 64870 USA  
Ph: 417-673-4631 or 1-800-641-2008 Fax: 417-673-5001  
[www.Detecto.com](http://www.Detecto.com)

**Mobile:** [m.detecto.com](http://m.detecto.com)

**SOLD BY:**