



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

**9000**

**Self-contained Premier refrigerated display cases**

**Short form specifications**

Exterior sides shall be 22-gauge stainless steel. Exterior back and bottom shall be 20-gauge galvanized metal. Exterior front shall be trimmed with 22-gauge stainless steel.

Interior top, back and bottom shall have 22-gauge stainless steel. Interior ends shall be thermoformed ABS plastic material. Cabinet shall be insulated with 2.00" (5.1cm) of high-density foamed-in-place polyurethane. A 0.25" (0.6cm) thick plate glass mirror shall be mounted at an angle in the rear of the cabinet, in front of the evaporator coil and blower fan.

Doors shall be 0.50" (1.3cm) thick thermopane glass, and shall be self-closing. Doors shall be easily removable for cleaning.

Cabinet shall have (2) 10.00" (25.4cm) deep removable epoxy-coated wire shelves. Cabinet shall have (1) fluorescent light fixture with ON/OFF switch.

Unit shall be supplied with wall-mounting angle on the back, with (2) adjustable brackets shipped loose for field installation. NOTE: The instructions included in the installation manual must be followed exactly to prevent personal injury or damage to the equipment.

Compressor shall be mounted at the rear of the cabinet, and shall include a condenser coil and hot gas condensate evaporator. Refrigerant flow shall be controlled by a capillary tube. Refrigeration system shall use HFC-404A refrigerant, and maintain 36°F (2°C) to 40°F (4°C) interior cabinet temperature.

Electrical connections shall be 120 volts, 60 Hertz, single phase. Unit shall have a 8' (2.4m) long cord and NEMA 5-15P plug.




Model 9048

**Optional accessories & modifications**

- Stainless steel top and back
- Laminate ends
- Sliding door lock
- Legs for table top installation
- Special voltages (consult factory)\*

\*Inclusion of this option will alter the electrical specifications of the unit.



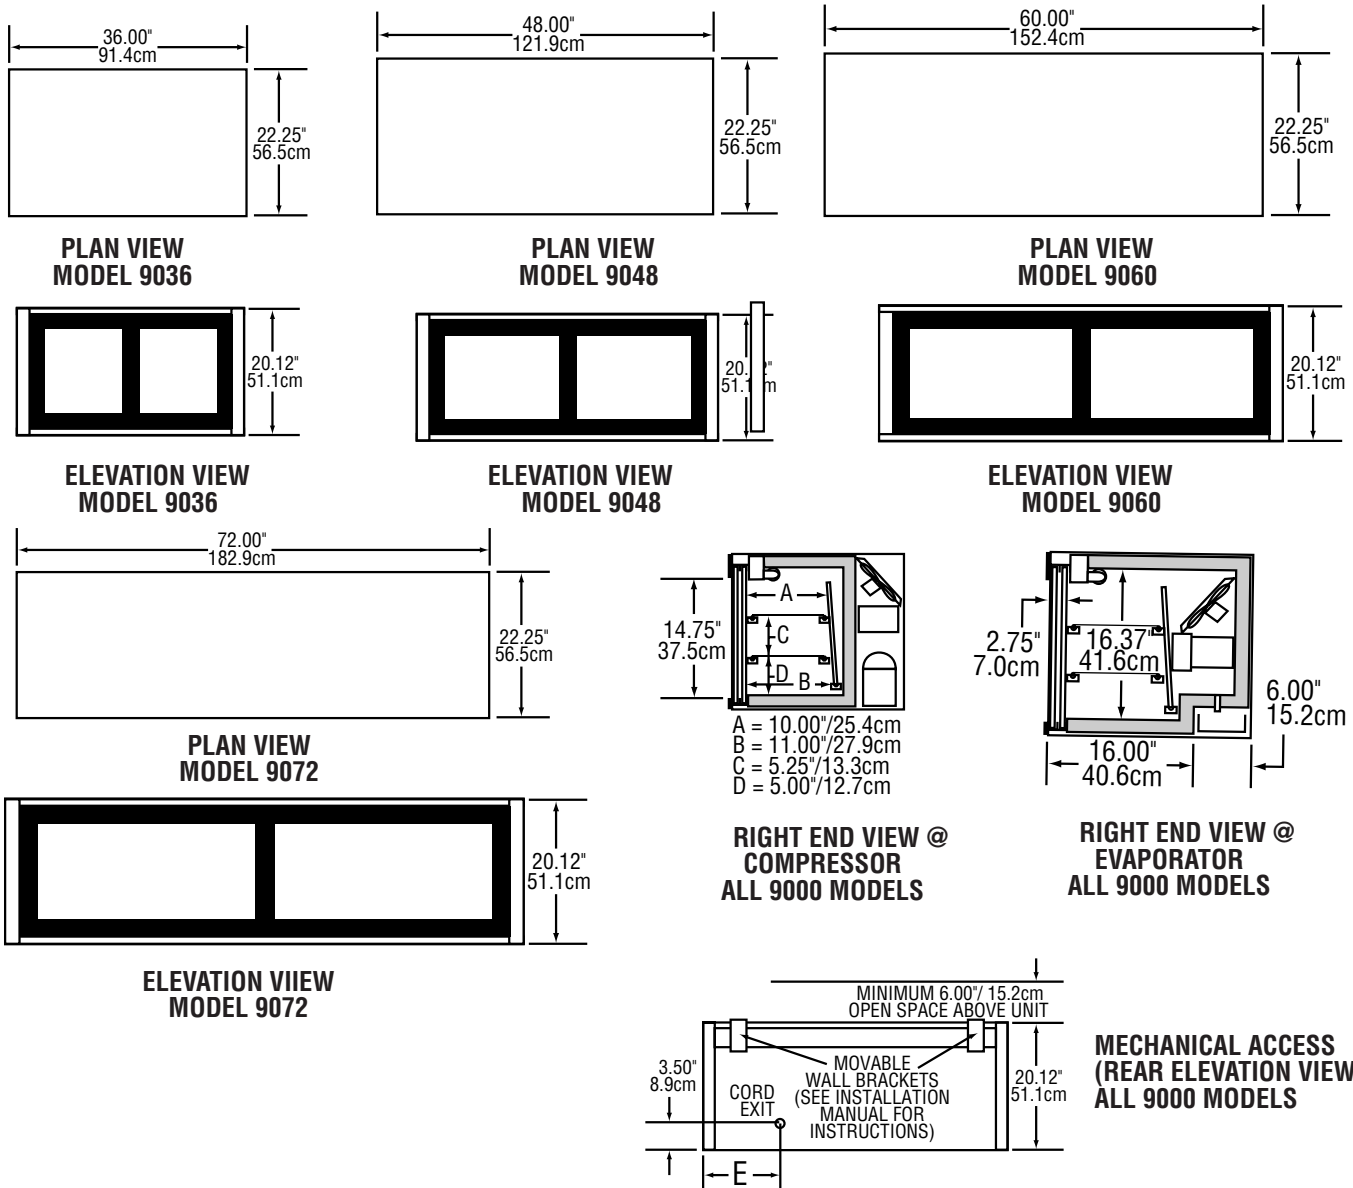

MODEL NUMBER	E	SHELF AREA	STORAGE CAPACITY	SHIP WEIGHT	HORSE-POWER	VOLTS/HERTZ/ PHASE	AMPS	NEMA PLUG
<b>9036</b>	4.50" 11.4cm	6.9 ft 0.64 m	3.7 ft <sup>3</sup> 0.10 m <sup>3</sup>	188 lbs 85 kg	1/5	115/60/1	7.5	5-15P
<b>9048</b>	4.50" 11.4cm	9.5 ft 0.88 m	5.1 ft <sup>3</sup> 0.14 m <sup>3</sup>	220 lbs 100 kg	1/5	115/60/1	7.5	5-15P
<b>9060</b>	12.00" 30.5cm	12.1 ft 1.12 m	6.5 ft <sup>3</sup> 0.18 m <sup>3</sup>	276 lbs 125 kg	1/4	115/60/1	8.5	5-15P
<b>9072</b>	12.00" 30.5cm	14.6 ft 1.36 m	7.9 ft <sup>3</sup> 0.22 m <sup>3</sup>	316 lbs 143 kg	1/4	115/60/1	8.5	5-15P