

HOSHIZAKI

F-300/500BAF
Item # 13142
10/03

F-300/500BAF SERIES


SELF-CONTAINED FLAKER WITH BUILT-IN STORAGE BIN




F-300BAF
Air-Cooled
F-500BAF
Air-Cooled

F-500BAF Flaker
Self-Contained with
Storage Bin and
Optional 6" Legs

- **F-300BAF**
 - Up to 303 lbs. of ice production per 24 hours
 - 110 lbs. built-in storage
- **F-500BAF**
 - Up to 478 lbs. of ice production per 24 hours
 - 250 lbs. built-in storage
- **Designed for long life dependability**
- **Corrosion resistant stainless steel**
- **Automatic system flush when bin control is activated**
- **Gear motor protected from overload**
- **Removable/cleanable air filter**



F300/500BAF



F300/500BAF*

ICEMAKER DIMENSION

Width x Depth x Height

F300BAF
36 x 24 x 33
F300BAF*
36 x 24 x 39
F500BAF
38 x 29 x 36
F500BAF*
38 x 29 x 42

*With optional 6" legs

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com



Reliability is a beautiful thing™



F300/500BAF SERIES

DIMENSIONS (Inches) - CONNECTIONS

SELF CONTAINED FLAKER WITH BUILT-IN STORAGE BIN



F-300BAF (AIR-COOLED)

■ **F-300BAF** - Up to 303 lbs. of ice production per 24 hours

F-500BAF (AIR-COOLED)

■ **F-500BAF** - Up to 478 lbs. of ice production per 24 hours

WARRANTY TWOYEAR - Parts & Labor on entire unit. FIVEYEAR - Parts on: Compressor, Air-Cooled Condenser Coil.	ANTI-MAGNETIC STAINLESS STEEL INTERNAL AUGER	SERVICE Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	R-404 REFRIGERANT	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.








STORAGE BINS F-300BAF - Built-in 110 lb. Capacity F-500BAF - Built-in 250 lb. Capacity	
CIRCUIT BREAKER OR FUSE protects gear motor from overload GEAR MOTOR runs one minute after termination of ice making to clear all ice from evaporator	
OPERATING LIMITS Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F Voltage Range 104 - 127V Water Pressure 10 - 113 psig	ELECTRICAL & PLUMBING F-300 - 115V/60/1 (15 Amp Max Fuse Size) F-500 - 115V/60/1 (20 amp Max Fuse Size) 3/8" OD copper or equivalent independent water supply 3/4" independent drain connection

AIR - COOLED F-300BAF				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	303	290	278
	80°	267	256	246
	90°	236	232	218

AIR - COOLED F-500BAF				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	478	458	438
	80°	419	400	383
	90°	366	359	335

UTILITY CONSUMPTION				
Model Number	Approximate Electrical		KWH per 100 lbs.	
	90/70	70/50	90/70	70/50
F-300BAF	651W	613W	6.7	4.8
F-500BAF	900W	854W	6.0	4.3

SPECIFICATIONS				
Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
F-300BAF	Air-Cooled	9.0	N/A	205 lbs.
F-500BAF	Air-Cooled	10.4	20	250 lbs.

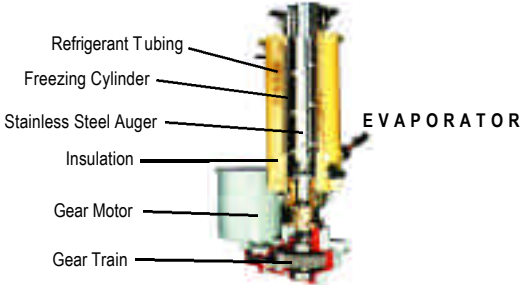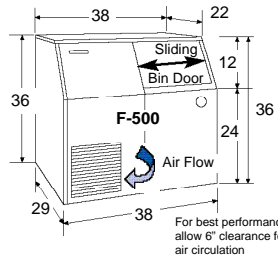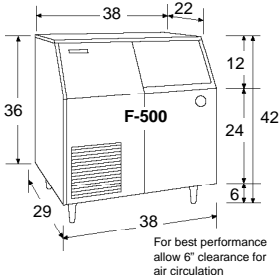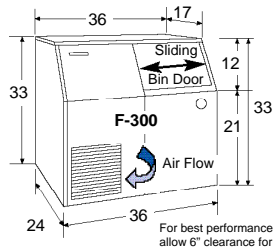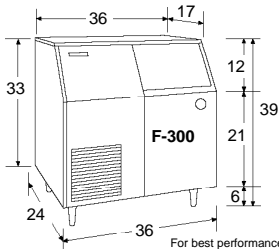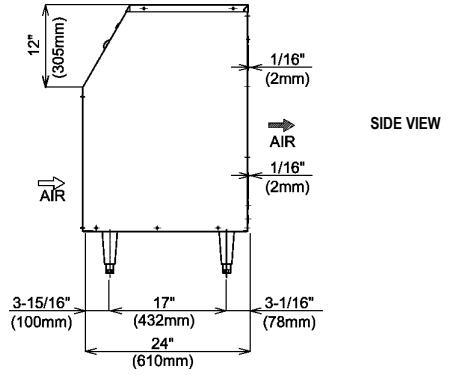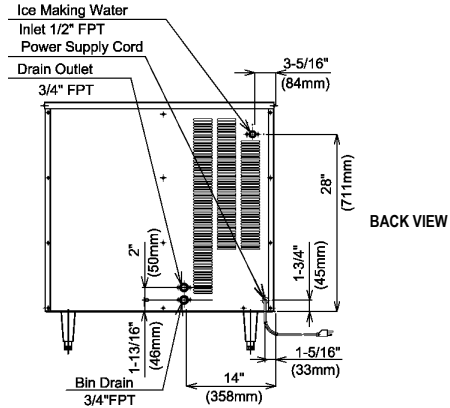

© HOSHIZAKI AMERICA, INC.

We reserve the right to change specifications without notice.

Printed in U.S.A.