




America's Oldest Stove Company
(Est. 1838)


JOB _____ ITEM # _____

HOT PLATES

FHP SERIES

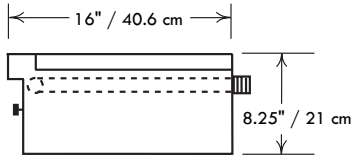

FHP1, 2, 3 & 4 Side view

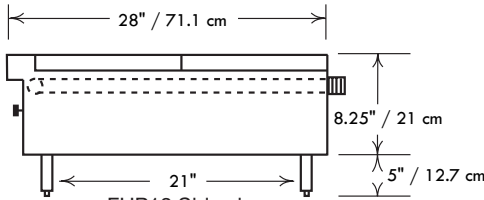

FHP12 Side view



FHP24



FHP12



FHP3S



FHP1



Standard Features & Benefits

CONSTRUCTION: Easy cleaning, corrosion resistant stainless steel finish, welded with angle iron and aluminized inner framing. Sturdy 4" heavy duty stainless pipe legs with adjustable feet. Stainless steel bullnose-rail is safely flush with the cook tops and functional to straddle pots, skillets and plates and also serves as control protection. Double wall construction with heavy insulation for cooler operation. Installation clearances for non-combustible surfaces are 0" on the sides and 0" in the rear, combustible surfaces are 4" on the sides and 5" in the rear.

CONTROLS: Equipped with brass gas valves and automatic standing pilots. Pressure regulators are set at the factory for the gas specified. Optimal pressures are 4" WC for natural gas and 10" WC for propane. Manifold size is 3/4" NPT. All controls are tested and confirmed in good working order. Calibration and adjustments are the responsibility of the installer.

BURNERS: 24,000 BTU "star" pattern top burners with no gaskets to leak. The large 7" flame spread offers a more efficient burn pattern for small to large pots. Cooks faster with less fuel consumption.

TOP GRATES: 12" x 12" solid cast iron with spillover bowl that also reflects heat to the cooking surface for added efficiency. Grates are flush with the front rail for tip & spill safety, more space and easy movement for pots & pans across the tops.

MATCH-UP: FHP Series hot plates are designed to match up with FHP char-broilers and griddles.

ACCESSORIES: Porcelain top grates, lift off griddles, gas hoses, carrying handles, knob protectors, cleaning supplies and matching equipment stands.

SPECIFICATIONS

Model Number	# of burnrs	width in./mm.	Total BTU	Approx. lbs/kg
FRONT TO BACK				
FHP12	2	12/305	48K	80/36
FKHP18*	2	18/457	80K	125/57
FHP24	4	24/610	96K	150/68
FKHP36*	4	36/914	160K	210/95
FHP36	6	36/914	144K	210/95
FHP48	8	48/1219	192K	340/155
FHP60	10	60/1524	240K	400/182
FHP72	12	72/1829	288K	450/205
SIDE BY SIDE (legs extra)				
FHP1	1	12/305	24K	40/19
FHP2	2	24/610	48K	90/41
FHP3	3	36/914	72K	105/48
FHP4	4	48/1219	96K	155/70
FHP2S	2	24/610	48K	105/48
FHP3S	3	36/914	72K	130/59
FHP4S	4	48/1219	96K	195/89

*not ETL design listed



Comstock-Castle Stove Co. • 119 W. Washington • Quincy, IL 62301 USA
Tel.: 217-223-5070 • Telefax: 217-223-0007 • www.castlestove.com

