

# FS-1001MLH-C

## SERENITY SERIES

### CUBELET ICE MACHINE

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

FS-1001MLH-C

10/10

Item # 13165

#### CUBELET DIMENSIONS

W x D x H

**FS-1001MLH-C**  
30 x 11 x 26

#### CONDENSING UNIT DIMENSIONS


W x D x H

**Installation Dimension SRC-10H**

30<sup>1/4</sup> x 25<sup>3/8</sup> x 34<sup>7/8</sup>\*  
\*with legs

**Actual Dimension SRC-10H**

28<sup>1/4</sup> x 23 x 19<sup>7/8</sup>




FS-1001MLH-C



#### FS-1001MLH-C

Remote Air-Cooled  
Shown

- Up to 830 lbs. of ice production per 24 hours
- Less heat in the kitchen
- Minimized noise
- No wires between units
- Durable stainless steel exterior
- Individual cubelet ice
- Small chewable ice
- Ice removed from evaporator after every shut down cycle
- CleanCycle I2® Design 
- Slim depth - easier to clean dispenser
- Front or back serviceability
- R-404A Refrigerant



ISO9001-15014:2001

#### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine. (Serial numbers Vxxxxx) and after.)

**Five Year** - Parts on compressor.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

A City Discount

# FS-100IMLH-C CUBELET ICE MACHINE SERENITY SERIES

**DIMENSIONS**  
W x D x H  
**FS-100IMLH-C**  
30 x 11 x 26

**Installation Dimension**  
**SRC-10H**  
30<sup>1/4</sup> x 25<sup>3/8</sup> x 34<sup>7/8</sup>  
\*with legs  
**Actual Dimension**  
**SRC-10H**  
28<sup>1/4</sup> x 23 x 19<sup>7/8</sup>

## REMOTE AIR-COOLED




Water Temp° F.	50°	70°	90°
Air Temp° F.			
70°	830	805	785
80°	765	750	730
90°	710	<b>705</b>	680

## UTILITY CONSUMPTION


Model Number	Approximate Electrical		KWH per 100 LBS.		Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	90/70	70/50	90/70	70/50		
FS-100IMLH-C with SRC-10H	1745	1713	5.96	4.94	12	N/A

## SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
FS-100IMLH-C	Remote Air-Cooled	15	15	166 lbs.
SRC-10H	Air-Cooled	20	20	180 lbs.

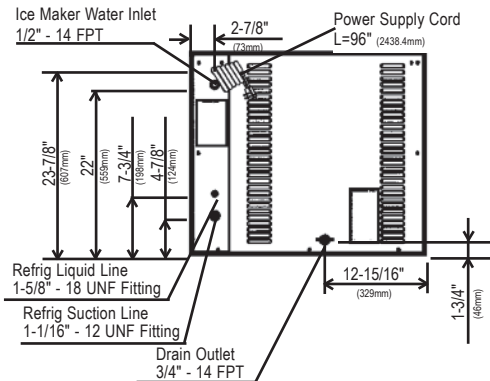

**SRC-10H Remote Condensing Unit** (Sold Separately)  
For Use with FS-100IMLH-C

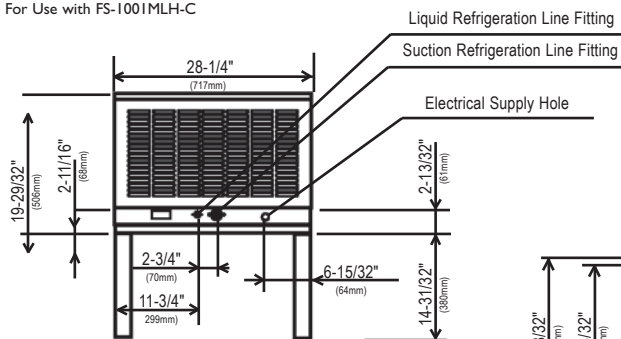

**Pre-Charged Tubing Kits**  
(Sold Separately)  
• 20' R404-20410  
• 35' R404-35410  
• 55' R404-55410

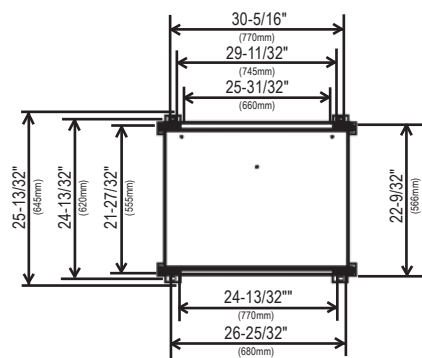

## ELECTRICAL & PLUMBING/FS-100IMLH-C

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 3/8" FPT copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection

## CONDENSING UNIT/SRC-10H

- 208-230V/60/1
- 20 amp Max Fuse/HACR Breaker Size

## OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

## CONDENSING UNIT

- Voltage Range 187 - 253V
- Ambient Temp Range -4 - 122°F

## SERVICE

- Panels easily removed and all components accessible for service.
- No wires between units
- Pump down cycle



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

A City Discount

