



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

AIA #

Location: _____

SIS #

Item #: _____ Qty: _____

Model #: _____

**GDM Series -
Floral Cases**



GDM-49FC

*TRUE is the world's largest manufacturer of
glass door merchandisers.*

Floral Cases

- GDM-12FC**, **GDM-23FC**,
- G4SM-23FC**, **GDM-47FC**,
- GDM-49FC**, **GDM-61FC**
- GDM-69FC**, **GDM-72FC**

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- Durable and permanent non-peel or chip black vinyl exterior (G4SM model standard in copper aluminum exterior).
- Black, vinyl coated aluminum interior cabinet liner with 300 series stainless steel floor. Construction of liner in accordance with NSF standards.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection.
- Safety shielded agro interior lighting.

DOORS:

- Triple pane thermal insulated glass. Swing door models- doors extend full width of cabinet shell and door gaskets of one piece construction.
- Adjustable, self closing, torsion type closure system on swing door models; slide door models feature self closing, counter-balanced weight system; The face of each door fitted with a 12" long handle.

INSULATION:

- Entire cabinet structure insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- 2 adjustable black vinyl coated wire shelves per door. Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator designed to accommodate a broad range of floral temperature settings (33°F to 50°F) interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve). (higher temperature range control available for specific floral applications P/N 800335)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1
NEMA-5-15R

Also available:

- **Glass End Floral Cases**
- **Radius Front Floral Cases**

Remote cabinets available 14% off list
(condensing units supplied by others).
Consult factory technical service dept. for BTU information.

Specifications subject to change without notice.

Printed in
U.S.A.




APPROVALS:

2/03

Exceptions:



GDM Series: Floral Coolers

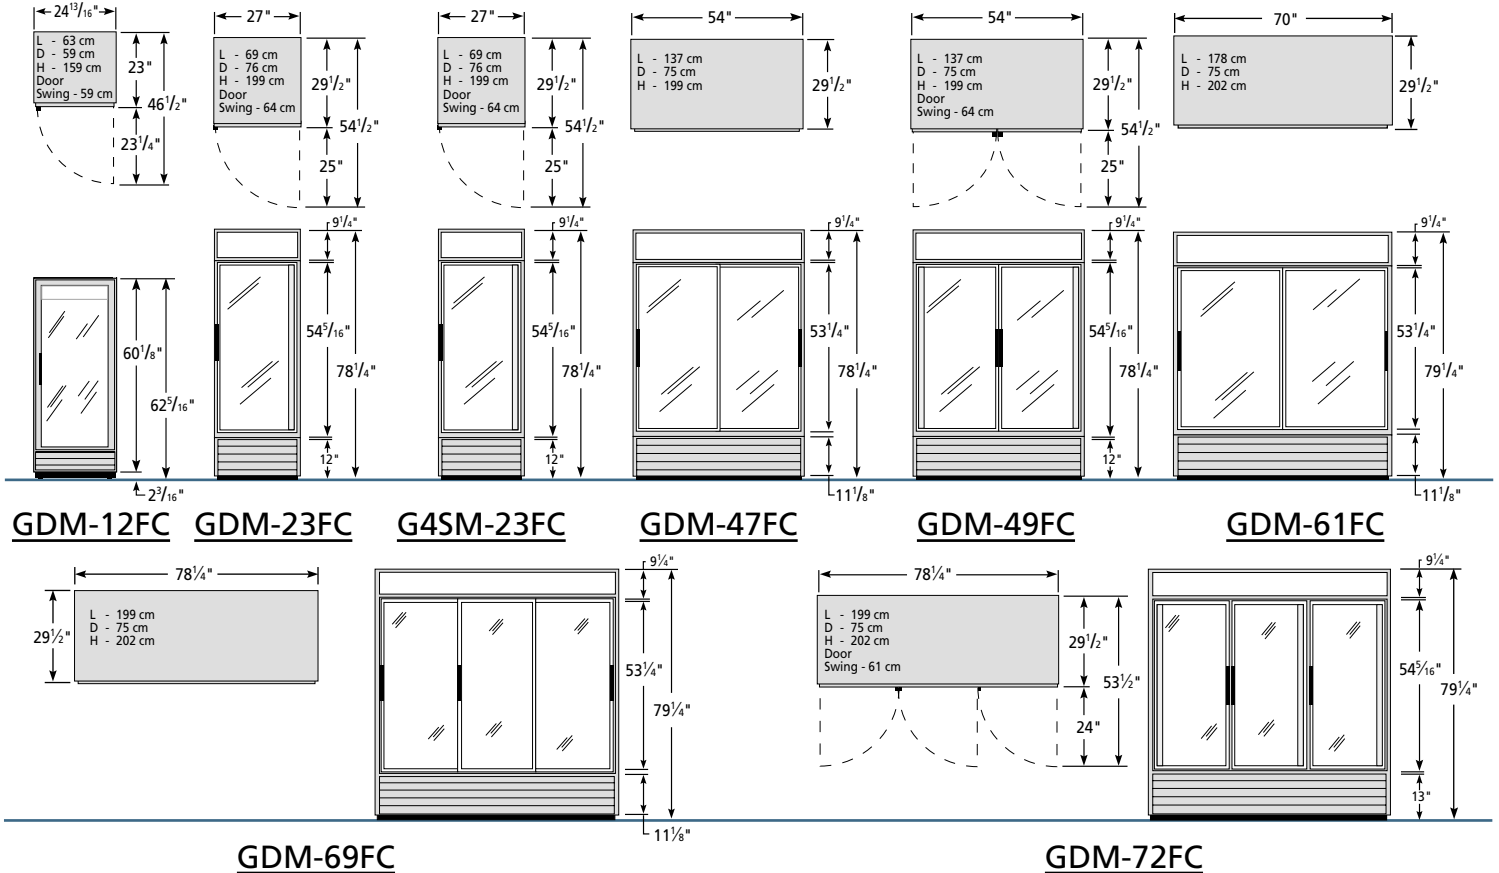

Rough-In Data													
Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D†	H							
GDM-12FC*	1 swing	12	2	24 13/16	23	62 5/16	1/5	115	1	5.0	5-15	6	233
GDM-23FC*	1 swing	23	2	27	29 1/2	78 1/4	1/3	115	1	7.5	5-15	9	312
G4SM-23FC	1 swing	23	2	27	29 3/4	78 1/4	1/2	115	1	10.0	5-15	9	416
GDM-47FC*	2 slide	47	4	54	29 1/2	78 1/4	1/2	115	1	10.6	5-15	9	472
GDM-49FC	2 swing	49	4	54	29 1/2	78 1/4	1/2	115	1	10.6	5-15	9	472
GDM-61FC	2 slide	61	4	70	29 1/2	79 1/4	1/2	115	1	11.3	5-15	9	594
GDM-69FC*	3 slide	69	6	78 1/4	29 1/2	79 1/4	1/2	115	1	12.0	5-15	9	664
GDM-72FC*	3 swing	72	6	78 1/4	29 1/2	79 1/4	1/2	115	1	12.0	5-15	9	660

* Available in Glass End model

† Depth does not include 1 3/8" for handle on swing door models. Or 1/4" for slide door models.

Specifications subject to change without notice.

Standard Features

- Oversized and balanced, environmentally friendly 134A refrigeration system designed to accommodate a broad range of floral temperature settings 33°F to 50°F.
- Black laminated vinyl exterior (G4SM model standard with copper aluminum exterior).
- Black, vinyl coated aluminum interior and 300 series stainless steel bottom.
- Baffled airflow - blossom supporting, correct temperature and humidity for longer shelf life of fresh flowers.
- Interior Agro lighting designed for flowers to prevent browning.
- Triple pane thermal glass.
- Swing doors: positive seal torsion type closure system, self-closing doors. Slide doors: counter-balanced weight system.
- Adjustable black vinyl coated wire shelves.
- Foamed-in-place polyurethane high density cell insulation (CFC free).
- Epoxy coated evaporator.
- Illuminated sign panel with attractive, sales stimulating signs. (decals on 12FC models)
- Bottom mount compressor.
- Slide out compressor can be serviced easily and accessed by a single repairman.

- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.
- See our website www.truemfg.com for the latest color & sign offerings.

Optional Accessories

- Mirrored backs available
- Exterior options: white, walnut, and rosewood vinyl available at no extra charge.
- Floral thermostat available.
- Additional shelves available.
- A variety of sign panels available.
- Available with 2 1/2" or 4" diameter castors.
- Stainless steel or optional seismic legs.

Clearance Required For Coolers (USA)

Sides Inches/mm	Top* Inches/mm	Rear Inches/mm
0 / 0	1 / 26	1 / 26

* GDM-12FC only.

Model	KCL				Model	KCL			
	Front	Right	Plan	3D		Front	Right	Plan	3D
GDM-12FC	TFAY55E	TFAY55S	TFAY55P	TFAY553	GDM-49FC	TFAY03E	TFAY03S	TFAY03P	TFAY033
GDM-23FC	TFAY03E	TFAY03S	TFAY03P	TFAY033	GDM-61FC	TFAY25E	TFAY02S	TFAY25P	TFAY253
G4SM-23FC	TFAY10E	TFAY10S	TFAY10P	TFAY103	GDM-69FC	TFAY02E	TFAY02S	TFAY02P	TFAY023
GDM-47FC	TFAY04E	TFAY07S	TFAY04P	TFAY043	GDM-72FC	TFAY01E	TFAY01S	TFAY01P	TFAY013

TRUE FOOD SERVICE EQUIPMENT

