



**GL-X**


Chemical Sanitizing  
Glasswasher



**MODEL GL-X**

#### FEATURES:


- 30 racks per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and deliming system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.
- Instant start for simple operation.
- Built-in Hot Water Assurance System guarantees hot water every cycle.
- Pumped drain allows for flexible installations. No floor drain required.
- Wash tank sustainer heater keeps water at proper temperature between loads.



Upper and lower rotating wash arms guarantee excellent results.



Uses standard 19-3/4"X 19-3/4" racks. Large 11-1/4" glass clearance.



"Built in" Hot Water Assurance System provides hot water every cycle.




"Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.

#### Available Options

- Sanitizer Alarm

**CMA  
MIZER®**  
Registered Trademark

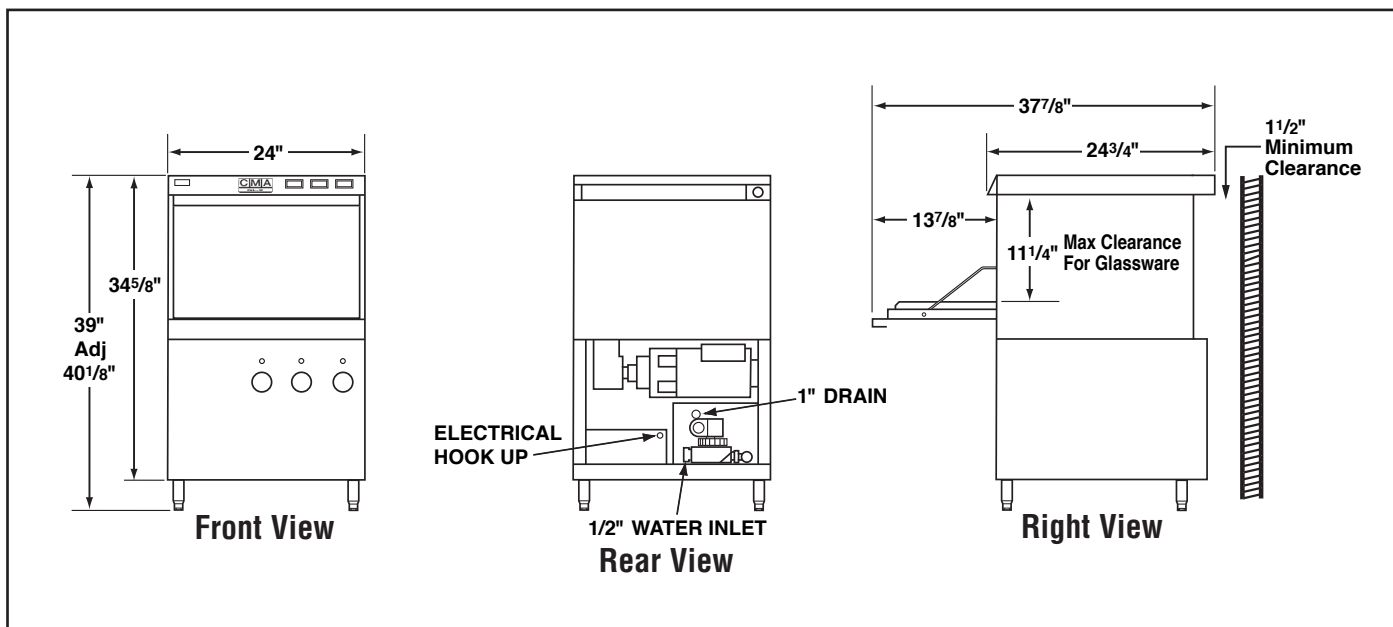

**GL-X**Chemical Sanitizing  
Glasswasher**Specifications:**

MODEL GL-X	USA	METRIC		USA	METRIC
<b>OPERATING CAPACITY</b>			<b>WASH PUMP MOTOR HP</b>	1	1
RACKS PER HOUR	30	30	<b>DIMENSIONS</b>		
<b>OPERATING CYCLE</b>			DEPTH	24-3/4"	(63cm)
WASH TIME-SEC	58	58	WIDTH	24"	(61cm)
RINSE TIME-SEC	32	32	HEIGHT	39"-40-1/8"	(99-102cm)
DWELL/TIME-SEC	30	30	MAXIMUM CLEARANCE FOR GLASSWARE	11-1/4"	(28.57cm)
TOTAL CYCLE TIME	120	120	<b>STANDARD DISHRACK</b>	1	1
WASH TANK CAPACITY	1.7 GAL.	(6.45 L)	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
WASH PUMP CAPACITY	35 GPM	(132 LPM)	<b>ELECTRICAL RATING</b>	<b>VOLTS</b>	<b>AMPS</b>
<b>MINIMUM TEMPERATURE REQUIRED</b>				115	16
WASH TEMP.	120°F	(50°C)	<b>SHIPPING WEIGHT APPROXIMATE</b>	244#	(110.6kg)
<b>WATER CONSUMPTION</b>					
PER RACK	1.7 GAL.	(6.45 L)			
PER HOUR	40.8 GPH	(154.4 LPH)			
WATER INLET	1/2"	(1.27 cm)			
DRAIN	1"	(2.54cm)			

**WARNING:** Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

**Summary Specifications: Model GL-X**

The GL-X glasswasher is designed to produce sparkling clean glassware utilizing our unique Hot Water Assurance System. The GL-X is easy to use, fast and efficient, while conserving water, energy and chemicals. Built-in sustainer heater provides continuous 130°F hot water every cycle. The GL-X is constructed entirely of stainless steel and is equipped with an integrated chemical delivery system. The GL-X incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

**CMA**  
**MIZER®**  
Registered Trademark