

GSR Series - Reach In Sliding Glass Door Refrigerators - Bottom Mount

• PRODUCT SPECIFICATIONS SHEETS



Shown with hinged glass doors

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity

**Self-Contained
Remote**

**GSR48BM
R-GSR48BM**

**GSR75BM
R-GSR75BM**

**GSR102BM
R-GSR102BM**

Length

52-1/4"

78"

103-3/4"

Height

82-1/4"

82-1/4"

82-1/4"

Depth with drain cover

35-1/2"

35-1/2"

35-1/2"

(Dimensions are +/-1/4")

- Specification subject to change without notice

GSR Series - Reach In Sliding Glass Door Refrigerators - Bottom Mount

Standard Specifications and Optional Features

<p>CONSTRUCTION UL Classified to ANSI/NSF 7 Heavy duty construction CFC free foamed in place insulation Removable front grille for easy servicing 2, 3 and 4 door models available Heavy duty easy glide Pike sliding doors</p>	<p>FINISHES Doors-Black vinyl extrusion Exterior-designer white Interior-designer white Rear-coated galvanized</p>
<p>INTERIOR White aluminum ends and back White aluminum floor Aluminum evaporator fan housing 4 heavy duty epoxy coated shelves per door</p>	<p>REFRIGERATION Bottom mounted condensing unit R134a refrigeration 2 & 3 door-capillary tube 4 door-expansion valve Remote available</p>
<p>EXTERIOR White aluminum ends and fronts Double pane glass doors 24-3/4" X 59-1/2" provides wide view display</p>	<p>LIGHTING Vertical light behind mullion 2 Dr = 1 light 3 Dr = 2 lights 4 Dr = 3 lights</p>
<p>ELECTRICAL REQUIREMENTS 2,3 Door Units 115V/60Hz/1Ph Cord and plug 4 Door 115V/208-230V/60Hz/1Ph Unit must be hard wired UL/CUL listed</p>	<p>Important Note: All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.</p> <p>Important Note: Product must be cooled before being displayed within the case.</p>

OPTIONAL FEATURES

<p>Stainless steel, laminate or paint Digital thermometer Extra shelf with clips</p>	<p>Door locks</p>
--	-------------------



GSR Series - Reach In Sliding Glass Door Refrigerators - Bottom Mount

Technical Data

Model #	Self contained	GSR48BM	GSR75BM	GSR102BM
	Remote	R-GSR48BM	R-GSR75BM	R-GSR102BM
Length Height Depth with drain cover (Dimensions are +/- 1/4")		52-1/4" 82-1/4" 35-1/2"	78" 82-1/4" 35-1/2"	103-3/4" 82-1/4" 35-1/2"
Operating temperature Refrigerant System Type Compressor size- HP Refrigeration system BTU's at +20°F Evap. Temp. Voltage Amperage Amperage Cord and plug	Self contained Self contained Remote Self contained Remote	38°F to 41°F R134a Capillary tube 1/3 Temperature Control 2400 115V 10.1A 2.5A Yes	38°F to 41°F R134a Capillary tube 1/2 Temperature Control 4400 115V 13.0A 3.3A Yes	38°F to 41°F R134a Expansion valve 3/4 Pressure control 5920 115/208-230V 6.4/7.1A 4.9A No
Exterior color Interior color Inside end panels Floors Drain Electric Condensate Total shelves Door size Cubic capacity (ft ³)		White White White White Yes 8 24-3/4"X59-1/2" (2) 48	White White White White Yes 12 24-3/4"X59-1/2"(2) 26-1/6"X59-1/2"(2) 75	White White White White Yes 16 24-3/4"X59-1/2"(4) 102


SHIPPING INFORMATION

Height		86"	86"	86"
Length		56"	84"	109"
Depth		44"	44"	44"
Gross weight	Self contained	570#	790#	1075#
	Remote	559#	665#	925#
Cubic feet		77ft ³	125ft ³	236ft ³

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Specification subject to change without notice

GSR Series - Reach In Sliding Glass Door Refrigerators - Bottom Mount

Technical Data • Side View • Plan View

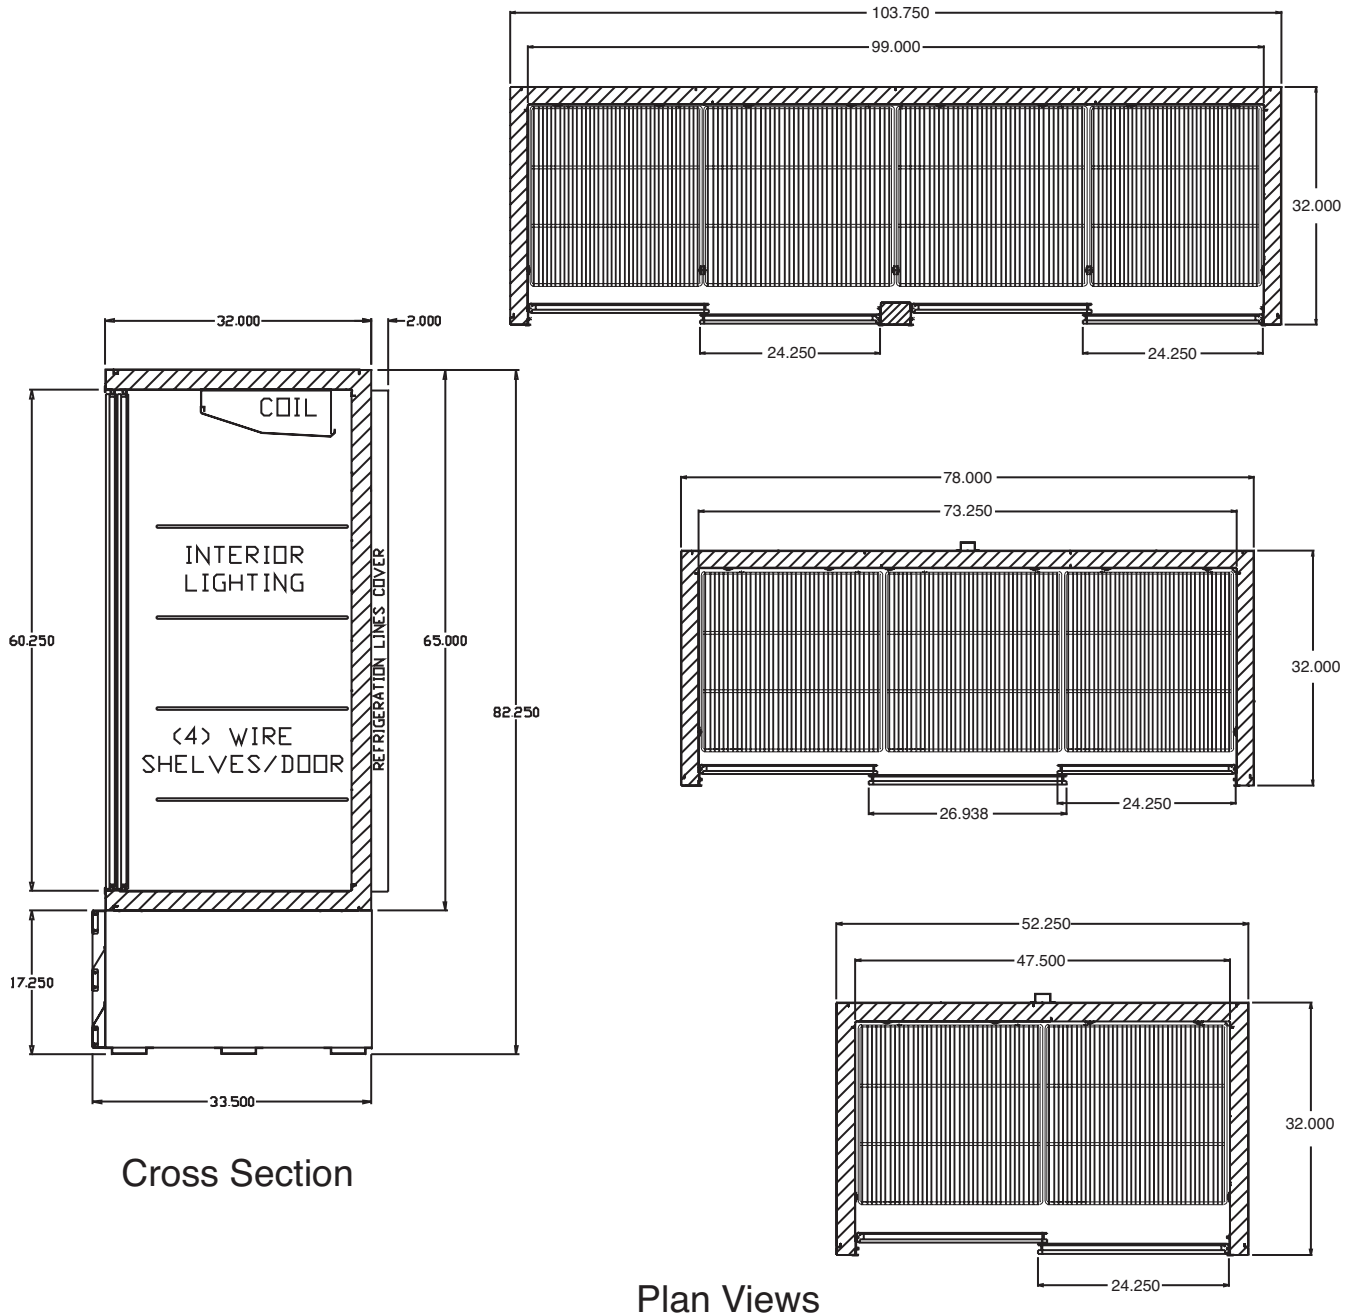

Cross Section

Plan Views