BAKERS PRIDE	HEAVY DUTY COUNTERTOP GAS GRIDDLES
	NEW
- 0-	*WOMERSPRIDE*

Picture is representative only. Not actual product.

SPECIFICATIONS

Gas counter top griddles with a low profile design that are only 13 1/8" tall to grilling surface making them ideal for use on refrigerated cabinets or counter tops.

HD Series Griddles are designed to mix and match with the HD or XX Series Char Broilers and HD or XOB Series counter top ranges.

The griddle plate is 1" thick (25.4mm) and 24" deep (610mm), polished, cold- rolled steel. Six widths are available from 24" (610mm) to 72" (1829mm) in one foot increments.

The HD Series features high-performance, energy-efficient, 33,000 BTUH burners located every 12" with individual, operator-controlled valves and are available in two control types: manual or thermostatic.

The interior combustion chamber is heavy-duty heat resistant 11and 16-gauge steel, and is hand-welded for strength and durability.

Standard features include stainless and aluminized steel exterior, spatula-width front grease trough, stainless steel landing ledge and large capacity, slide-out grease pan. Additional features include individual 3/4" NPT rear gas connection in natural or LP gas, pressure regulator and 4" (102mm) NSF approved legs with adjustable bullet feet. Stainless steel splash guards are continuously welded to the griddle plates.

One year limited parts and labor warranty.

Job	ltem #
JUD	TCTTT //

GAS COUNTER TOP GRIDDLES 6

Manual	Thermostatic
☐ HDMG-2424	☐ HDTG-2424
☐ HDMG-2436	☐ HDTG-2436
☐ HDMG-2448	☐ HDTG-2448
☐ HDMG-2460	☐ HDTG-2460
☐ HDMG-2472	☐ HDTG-2472

STANDARD FEATURES

1" thick griddle plate
24" deep grilling surface
Heavy gauge, hand-welded, heat-resistant steel combustion chamber
33,000 BTUH burners every 12"
Up to 198,000 total BTUH in natural or LP gas
Individually operated burner valves with manual, thermostatic/snap-action controls
Stainless and aluminized steel exterior
Stainless steel landing ledge
Stainless steel, welded splash guards
Low profile, counter top design - only 13 1/8" to grilling surface
Front grease trough
Stainless steel, slide-out grease pan
Heavy-duty 4" NSF approved adjustable chrome legs with bullet feet

OPTIONS & ACCESSORIES

3/4" (19mm) NPT rear gas connection


Limited one year parts & labor warranty


Stainless steel front-mounted work deck with or without sauce pan cut-outs
Condiment rail
Gas connector hoses
Equipment stands with or without casters
One year limited warranty


CERTIFICATIONS





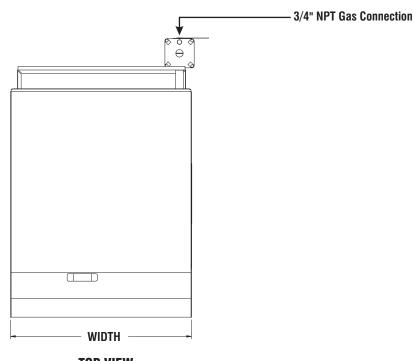





FRONT VIEW

SIDE VIEW

ALL DIMENSIONS NOMINAL

SHIPPING INFORMATION										
	Shipping	y Weigh	t	Carton Dimensions						
W. J. I			Width		Depth		Height		Cubic	
Model	Lhs.	Kilos	Inches	mm	Inches	mm	Inches	mm	Feet	Meter
HDG-2424	308	140	29 3/4	756	42 3/4	1086	18 3/4	476	16.0	.46
HDG-2436	460	209	41 3/4	1060	42 3/4	1086	18 3/4	476	24.6	.71
HDG-2448	540	245	53 3/4	1365	42 3/4	1086	18 3/4	476	30.2	.88
HDG-2460	655	297	65 3/4	1670	42 3/4	1086	18 3/4	476	32.6	.95
HDG-2472	770	349	77 3/4	1975	42 3/4	1086	18 3/4	476	34.9	1.01

GAS SUPPLY				
Model	ВТИН	KW	CONNECTION	
HDG-24	80,000	23.4	3/4"	
HDG-36	120,000	35.1	3/4"	
HDG-48	160,000	46.8	3/4"	
HDG-60	200,000	58.6	3/4"	
HDG-72	240,000	70.3	3/4"	

SPECIFICATION	IS								
	Grilling	g Area	# of			Overall D	imens	ions*	
Model	in.	mm	Burners	Wi Inches	dth mm	Dept Inches	th mm	Heiq Inches	jht mm
HDG-2424	24x23 7/8	610x606	2	24	610	33 5/16	846	15 7/32	387
HDG-2436	24x35 7/8	610x911	3	36	914	33 5/16	846	15 7/32	387
HDG-2448	24x47 7/8	610x1216	4	48	1219	33 5/16	846	15 7/32	387
HDG-2460	24x59 7/8	610x1521	5	60	1524	33 5/16	846	15 7/32	387
HDG-2472	24x71 7/8	610x1826	6	72	1829	33 5/16	846	15 7/32	387

*Height includes 4" (102 mm) standard legs to grilling surface

Non	-combustable constructio	n only
	Inches	mm
Right	0	0
Left	0	0
Rear	0	0