



THE NEW SYMBOL OF INNOVATION

One Glass Swing Door Freezer



J1GF-12S

12 cu.ft., 1 door swing

Recessed Interior Light!
 Triple-Paned Tempered Heated Anthony® Thermal Glass!
 Exterior Digital Temperature Controls!
 Holds at temperatures up to minus-15°F.

STANDARD FEATURES:

- Capillary tube
- CFC-free R-404a Refrigerant
- Fully Covered Interior Corners
- Shielded Fluorescent Interior Light
- Bottom-Mounted Compressor & Condenser Coil
- Foamed-in-place Polyurethane Insulation
- Exterior Digital Temperature Control
- Triple-Paned Heated Glass Door
- Evaporative Condensate Pan
- Epoxy-Coated Wire Shelves
- Self-closing PVC-clad doors
- Automatic Defrost
- Assembled in the USA
- 7' Cord & Plug

MATERIALS:

INTERIOR: Powder-coated cold roll steel ceiling and walls.
 Stainless steel floor.
 Epoxy-coated wire shelves.

EXTERIOR: Powder-coated cold roll steel cabinet.
 Top sign panel.
 Triple-pane glass door.



Conforms to UL Std. 471
 Certified to CSA Std. C22.2

DIMENSIONAL DATA:

Model No.	W	D	H	DOORS	Cu.Ft.	Shelves	H/P	Volt	Amp.	NEMA	Ship wt.
5U-L3-00	21.9	24.4	33.0	1	5	3	1/4	115/60/1	3	5-20P	120
J1GF-12S	25.0	26.0	60.2	1	12	4	1/2	115/60/1	7.8	5-20P	250
J1GF-20S	29.1	31.4	75.5	1	20	4	3/4	115/60/1	9.1	5-20P	420
J2GF-40S	49.6	31.4	75.5	2	40	8	3/4	115/60/1	13.8	5-20P	620



Refrigeration Equipment Manufacturer

Glass Door Freezer Merchandiser J1GF-12S

Description: One glass door freezer merchandiser, 12 cu. ft

Features & Benefits

Self-Contained **bottom mounted** compressor for "no-stoop" easy removal of merchandise.

- Holds $-15^{\circ} F$ to $-5^{\circ} F$ as freezer

2.5" thick foamed-in-place high density polyurethane insulation.

Triple-paned tempered thermal glass for better insulation and energy efficiency.

Exterior LED temperature display with digital controls. **Temperature setting is easy, fast, and accurate.**



Micro-controller with adjustable temperature variance, automatic defrost intervals, setpoint limits, and parameter locking functions.

Illuminated sign panel with manual on/off switch.

Completely sealed, low-noise compressor.

Safety shielded fluorescent interior light for longer and brighter displaying of merchandise.

Four epoxy-coated adjustable steel wire shelves.

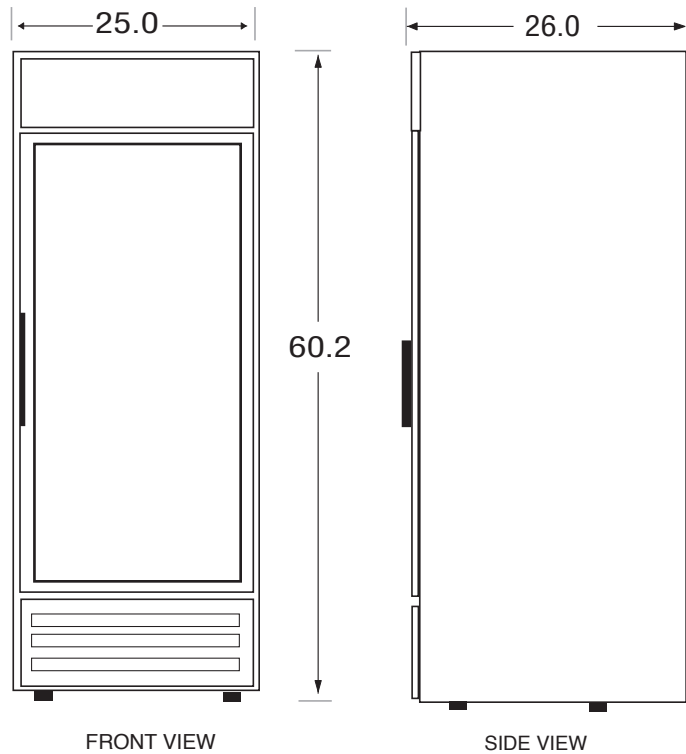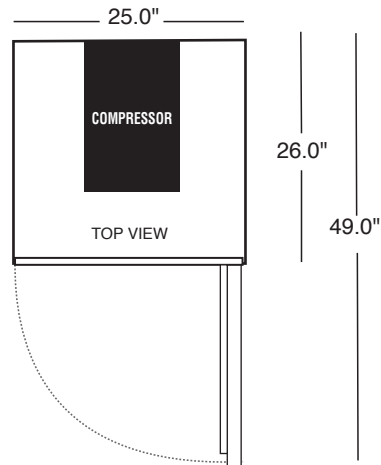

OPTIONS

- Extra Interior Shelves Qty. _____
- Clear plastic top panel (no design)

General Information

Cubic Ft.: 12

Shelf Size: 18.8" x 19.6"

Glass Doors: 1

Unit Weight: 200 lbs.

Exterior: Powder-coated

Ship Weight: 250 lbs.

Interior: Powder-coated

Technical Data

Refrigerant: R-404a

Volts: 115

Start Amps: 8.8

#Compressors: 1

Run Amps: 5.8

Cord Length: 82 in.

Horsepower: 1/2

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE