

HOSHIZAKI

Series



KM2000/2400S_H3
Item # 13128 04/04

KM-2000/2400S_H3 SERIES
CRESCENT ICE CUBER 3-PHASE STACKABLE



KM-2000SWH3
Water-Cooled
KM-2000SRH3
Air-Cooled Remote
KM-2400SRH3
Air-Cooled Remote

KM-2000SRH3 Cuber
Shown on Optional
B-900 Bin

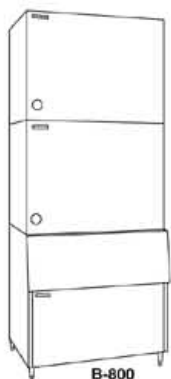

ICEMAKER DIMENSION	
Width x Depth x Height	
KM-2000/2400S_H	
48 x 27 ^{3/8} x 36 ^{7/16}	
DIMENSION BY BIN SIZE	
Width x Depth x Height	
B-800	48 x 32 ^{1/2} x 82 ^{7/16}
B-900	52 x 32 ^{1/2} x 82 ^{7/16}
B-800 (2 stacked)	48 x 32 ^{1/2} x 119 ^{7/8}
B-900 (2 stacked)	52 x 32 ^{1/2} x 119 ^{7/8}

- Durable stainless steel exterior
- CycleSaver® design 
- EverCheck® alert system 
- Individual crescent cube
- Stainless steel evaporator

KM-2000S_H3

- Up to 1891 lbs. of ice production per 24 hours
- Stackable for 3782 lbs. per 24 hour ice production in the same floor space.

KM-2400SRH3

- Up to 2321 lbs. of ice production per 24 hours
- Stackable for 4642 lbs. per 24 hour ice production in the same floor space.



Reliability is a beautiful thing™

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

1-800-438-6087

FAX 1-800-345-1325


TEL 770-487-2331

www.hoshizaki.com

CRESCENT ICE CUBER 3-PHASE STACKABLE



- KM-2000SWH3** (WATER-COOLED)
- KM-2000SRH3** (AIR-COOLED REMOTE)
- KM-2400SRH3** (AIR-COOLED REMOTE)



**STAINLESS STEEL
INTERNAL EVAPORATOR**
R-404 REFRIGERANT

SERVICE
Panels easily removed and all components accessible for service.
Removable/cleanable air filters.

WARRANTY

- THREE YEAR** - Parts & Labor on entire machine.
- FIVE YEAR** - Parts & Labor on : Evaporator
- FIVE YEAR** - Parts on: Compressor, Air-Cooled Condenser Coil.

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

STORAGE BINS

- B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin)
- B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin)
- B-1200 - 1200 lb. Application Capacity
- B-1500 - 1500 lb. Application Capacity

ELECTRICAL & PLUMBING

- 208-230/60/3
- 20 amp Max Fuse/HACR Breaker Size
- 1/2" OD copper or equivalent independent potable water supply
- 3/4" independent drain connection

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Voltage Range 187-253V
- Water Pressure 10 - 113 psig

WATER - COOLED 2000

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	1891	1883	1817
	80°	1885	1873	1776
	90°	1883	1864	1740

AIR - COOLED REMOTE 2000 / 2400


Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	1865 / 2301	1831 / 2307	1746 / 2172
	80°	1839 / 2305	1786 / 2315	1679 / 2100
	90°	1831 / 2307	1748 / 2321	1649 / 1980

UTILITY CONSUMPTION






Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal per 100 lbs.
	Lbs.	Cubes			
KM-2000SWH3	46.3	2160	3.8	20.17	77
KM-2000SRH3	46.3	2160	5.1	20.0	NA
KM-2400SRH3	44	2160	5.1	21.9	NA

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-2000SWH3	Water-Cooled	9.5	20	400 lbs.
KM-2000SRH3	Air-Cooled Remote	12.0	20	400 lbs.
KM-2400SRH3	Air-Cooled Remote	17	30	425 lbs.

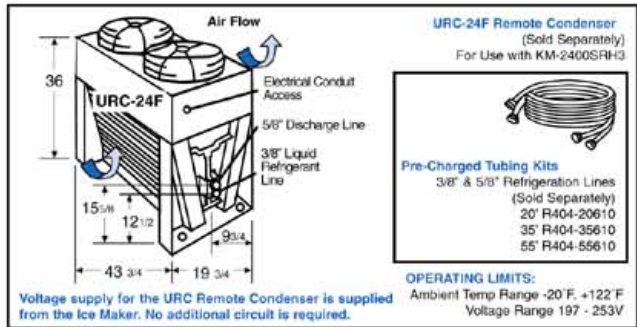

KM2400SRH3

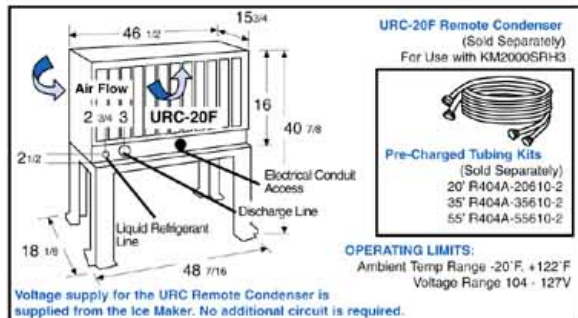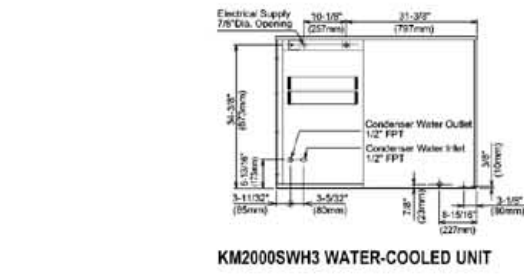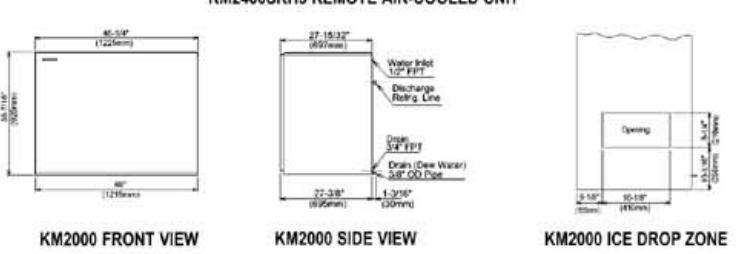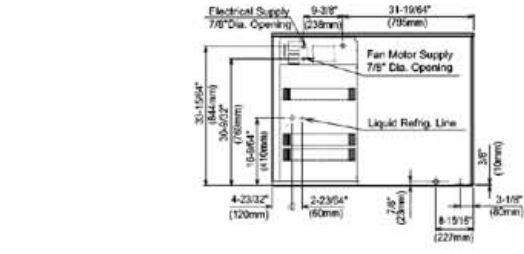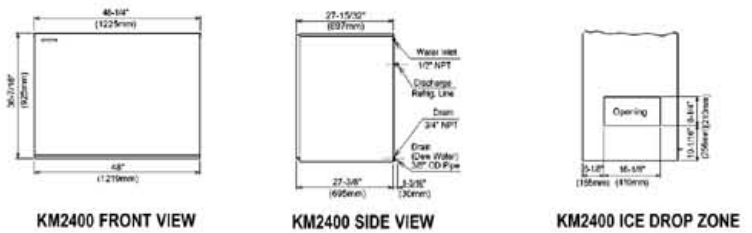

KM2000SRH3