



A JohnsonDiversey Company



L-1X
Chemical Sanitizing
Undercounter
Dishwasher

Item. # _____



FEATURES:

- 24 racks / 96 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All heavy duty 304 stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and delimiting system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.



Spec. # _____



Optional dishtable, faucet and pre-rinse unit sold separately.



Pumped drain will drain uphill. Requires no floor drain.



Upper and lower rotating wash arms guarantee excellent results.



Convenient to service "Works-in-a-drawer", may be removed by unplugging one electrical connection.



Optional pedestal allows the L-1X to be raised up to a full 12" off the floor for easy operator use. Height adjustable from 8" to 12".


AIA # _____



L-1X
Chemical Sanitizing Undercounter Dishwasher

A JohnsonDiversey Company

WARNING: Electrical and plumbing connections need to be made by a qualified service person who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.

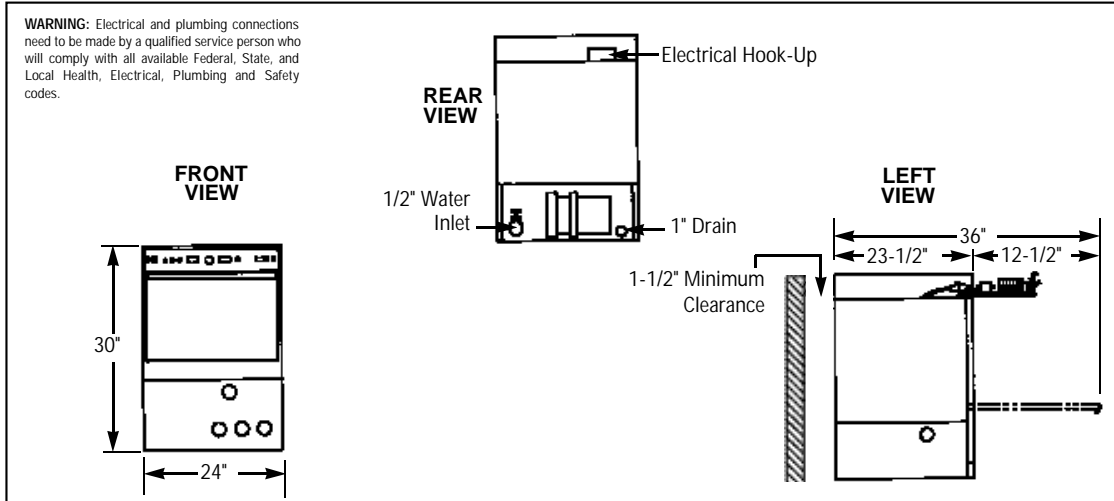

Spec. #

Specifications:

MODEL L-1X	USA	METRIC	USA	METRIC
OPERATING CAPACITY				
RACKS PER HOUR (NSF RATED)	24	24		
OPERATING CYCLE				
WASH TIME-SEC	57	57		
RINSE TIME-SEC	48	48		
DWELL/PURGE-SEC	15	15		
TOTAL CYCLE TIME	120	120		
WASH TANK CAPACITY	1.7 GAL.	(6.43 L)		
WASH PUMP CAPACITY	35 GPM	(132 LPM)		
OPERATING TEMPERATURE				
REQUIRED	120°F	(49°C)		
RECOMMENDED	140°F	(60°C)		
WATER CONSUMPTION				
PER RACK	1.7 GAL.	(6.43 L)		
PER HOUR	40.8 GPH	(154 LPH)		
WATER INLET	1/2"	-		
DRAIN	1"	-		
WASH PUMP MOTORS HP			1	1
DIMENSIONS				
DEPTH	26"	(66cm)		
WIDTH	24"	(61cm)		
HEIGHT	30"	(76.2cm)		
MAXIMUM CLEARANCE				
HEIGHT FOR DISHES	12-1/8"	(31cm)		
STANDARD DISHRACK			1	1
DIMENSIONS			19-3/4"X19-3/4"	(50X50cm)
ELECTRICAL RATING			VOLTS	AMPS
			115	16
SHIPPING WEIGHT				
APPROXIMATE			190#	(86kg)

Summary Specifications: Model L-1X

CMA Energy Mizer model L-1X low temperature, undercounter, chemical sanitizing, commercial dishwasher meets NSF, UL and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model L-1X is constructed entirely of 304 stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4"X19-3/4" racks. Unit comes standard with upper and lower stainless steel wash arms. The L-1X incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

Available Options

- Sustainer Heater
- Sanitizer Alarm
- CMA Temp-Sure™ (Self contained 12kW heater)
- Stainless Steel Legs 6" (set of 4)
- Stainless Steel Pedestal
- 48" Undercounter dishtable
- Alternative electrical available for export

AIA #