

D**TWO 10-GALLON TILTING KETTLES
DIRECT STEAM CONNECTED**

JOB NAME: _____

ITEM NO.: _____

NO. REQUIRED: _____

MODEL: MT10T10**SIZE:** 36" Wide x 47 1/2" High x 33" Front-to-Back
(914mm Wide x 1200mm High x 838mm Front-to-Back)
Height including handle 58" (1473mm)**DESCRIPTION:** Will be a Market Forge Model MT10T10, consisting of two 10-gallon (38-liter) type 304 stainless steel, tilting, steam jacketed trunnion kettles. Kettles will be mounted on a 20" (508mm) high cabinet base. Hot and cold water fill faucet, depressed area and drains, and steam control valves will be located on stainless steel marine-edged countertop. A 4" (102mm) deep 12" x 10" (305mm x 254mm) clean-up pan with removable splash guard will be standard. (*Splash guard will be removable so that it may also be attached to a food receiving pan.*) Kettles will be A.S.M.E.-approved and National Board Registered.

Cabinet base will be of modular design to match other Market Forge cooking equipment. Base with stainless steel frame will be equipped with 6" (152mm) stainless steel legs and adjustable bullet feet, reinforced die-formed stainless steel marine-edged countertop, and hinged doors with magnetic latches. Unit will be polished stainless steel.

OPERATION SHALL BE BY:Direct Steam at 15-50 PSI (1.0-3.5 kg/cm²) 1/3 BHP required per kettle. Over 50 PSI (3.5 kg/cm²), a pressure reducing valve is required.**OPTIONAL AT NO CHARGE:**

- Steam Pressure Relief Valve Not required if kettles connected to Market Forge gas or electric steam generator.

OPTIONS AT EXTRA COST:

- One-Piece Lift-Off Cover, Stainless Steel.
- Stainless Steel Wire Basket.
- Clean-Up Brush.
- Pressure Reducing Valve.
- Condensate Return Kit.
- Ball Float Trap.

The manufacturer reserves the right to modify materials and specifications without notice.

SPEC SHEET: S-3289B
10/12**FOOD SERVICE EQUIPMENT**
Two Ten Gallon Kettles**MARKET FORGE**
INDUSTRIES INC.

PRINTED IN U. S. A.

35 Garvey Street • Everett • MA • 02149
Tel: (617) 387-47100 • Fax: 1-800-227-2659 (Ex. MA) • (617) 387-4456 (MA and Overseas)
E-Mail: CUSTSERV@mfii.com • Website: www.mfii.com

A City Discount

D

TWO 10-GALLON TILTING KETTLES DIRECT STEAM CONNECTED

DETAILS & DIMENSION

SERVICE CONNECTIONS

Direct Connected

S*	Steam Supply - 3/4" (19mm) IPS for incoming steam at 15-50 PSI (1.0-3.5kg/cm ²).
HW	Hot Water - 1/2" (13mm) O.D. tubing for hot water to kettle fill faucet.
CW	Cold Water - 1/2" (13mm) O.D. tubing for cold water to kettle fill faucet.
D	Drain - Pipe full 2" (50mm) IPS to flush floor drain. DO NOT MAKE SOLID CONNECTION TO FLOOR DRAIN.
CR**	Condensate Return - 1/2" (13mm) IPS for incoming condensate return from kettle may be connected to condensate return line.
ST	Steam Take-Off - 3/4" (19mm) IPS for incoming steam from Market Forge Steam Generator.

* Pressure reducing valve is required if incoming pressure exceeds 50 PSI (3.5kg/cm²).



**Optional at extra cost.

Pressure relief valve must be installed in the incoming steam line if not connected to a Market Forge gas or electric steam generator. Valve is supplied on request at no extra cost.

NOTE: PVC & CPVC Pipe are not acceptable materials for drains.

SPEC SHEET: S-3289B
10/12

FOOD SERVICE EQUIPMENT
Two Ten Gallon Kettles

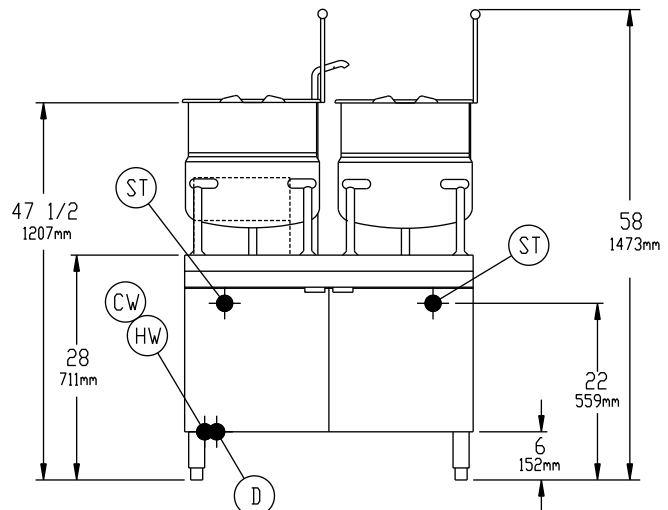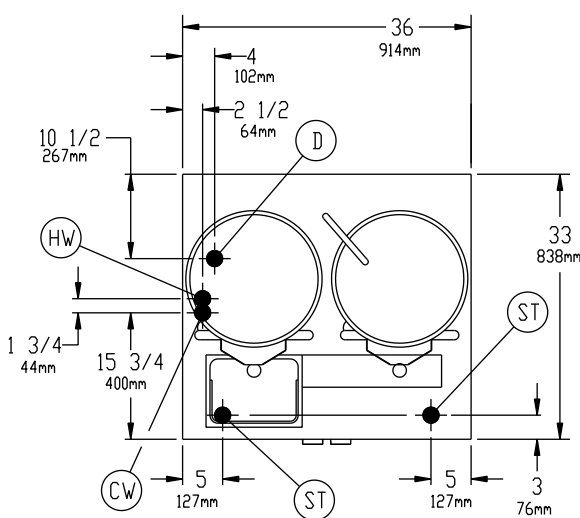

It is our policy to build equipment which is design certified by U.L., A.S.M.E., N.S.F. and C.S.A. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed and consequently not all models bear the appropriate agency labels at all times.



MARKET FORGE
INDUSTRIES INC.

PRINTED IN U. S. A.

35 Garvey Street • Everett • MA • 02149
Tel: (617) 387-47100 • Fax: 1-800-227-2659 (Ex. MA) • (617) 387-4456 (MA and Overseas)
E-Mail: CUSTSERV@mfii.com • Website: www.mfii.com

A City Discount