



N8100NB

Narrow Drop-In Self Contained Mechanically Cooled Refrigerated Cold Pans

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

N8100NB: Narrow Drop-In Self Contained Mechanically Cooled Refrigerated Cold Pans

Models

- N8146NB Two 12" x 20" pan capacity
- N8168NB Three 12" x 20" pan capacity



N8168NB
(pans by others)

Standard Features

- Integral V-stamped pan rest
- 20-gauge stainless steel top construction
- 2 BF stainless steel interior liner wrapped and spot clipped with refrigeration lines; thermal transfer compound is applied for superior cooling
- Adapter bars are provided standard for 12" x 20" openings
- Standard 1" plastic drain
- High density Environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation throughout unit
- Galvanized exterior body
- Non-marring press fit top gasket
- Condensing unit is suspended below on a 16-gauge galvanized frame
- HFC-134A refrigerant
- 8' cord and plug
- Stainless steel louver provided for field installation
- One year parts and 90 day labor standard warranty

Options & Accessories

- Custom sizes and styles
- Single or double service flip-up sneezeguards
- Relocate compressor
- Mullion fan assembly
- Adapter bars
- 220V/50 cycle*
- * Inclusion of this option will alter the electrical specifications of the unit


Specifications

Top is one-piece 20-gauge stainless steel. Interior liner is 22-gauge stainless steel and is creased to a 1.00" (2.5cm) diameter drain. Integral V-stamped pan rest recessed 2" (5cm) to accommodate 12" x 20" (30cm x 51cm) pans 4" (10cm) or 6" (15cm) deep supplied by others. Product temperatures of 33°F (1°C) to 41°F (5°C) are maintained at 86°F (29°C) ambient room temperature, meeting NSF 7 requirements. Adapter bars for 12" x 20" (30cm x 51cm) pans are standard.

Sides are wrapped with refrigeration lines. Sides and bottom are fully insulated with high-density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) closed-cell polyurethane. Exterior housing is 24-gauge galvanized steel.

Condensing unit is suspended below the cold pan on a 16-gauge steel frame and uses HFC-134a refrigerant. Temperature control has ON/OFF position to shut down cold pan. Unit has an 8' (2.4m) cord and NEMA 5-15P plug.

A stainless steel louver is provided for field installation on the front of the cabinet, 4" below top of counter; cutout dimension for each is 12" x 23.5" (30cm x 60cm).




980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858


Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619

www.delfield.com




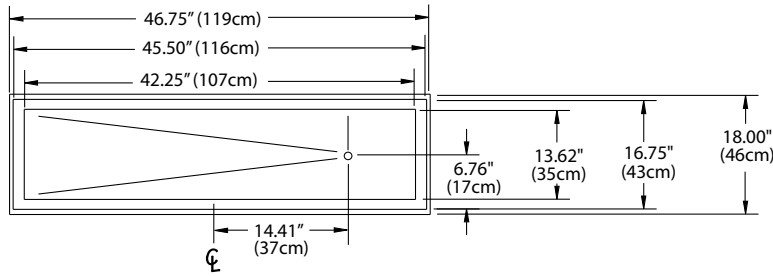


N8146NB Plan View

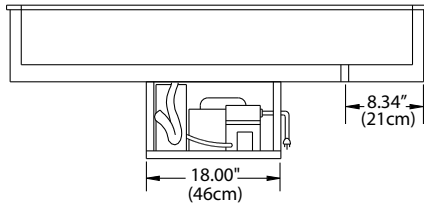


N8146NB Elevation View

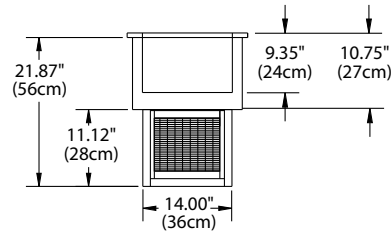


N8146NB End View

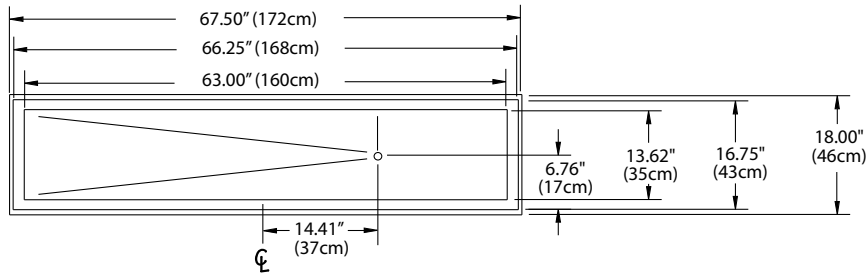

N8168NB Plan View

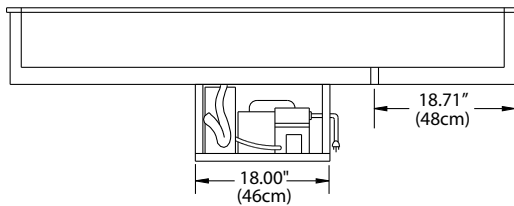

N8168NB Elevation View

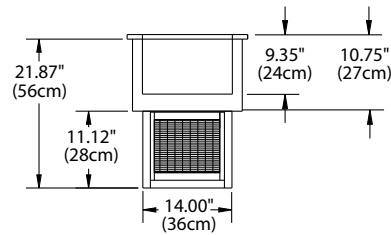

N8168NB End View

Specifications

Model	Counter Cutout Dimensions (DxL)	12" x 20" Pan Capacity	V/Hz/Ph	H.P.	Amps	BTU Load	System Capacity	Ship Weight
N8146NB	17.00" x 45.75" (43cm x 116cm)	2	115/60/1	1/5	4.0	454	680	175lbs/80kg
N8168NB	17.00" x 66.50" (43cm x 169cm)	3	115/60/1	1/5	4.0	676	804	240lbs/109kg

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
DSN8100NB
01/11

