

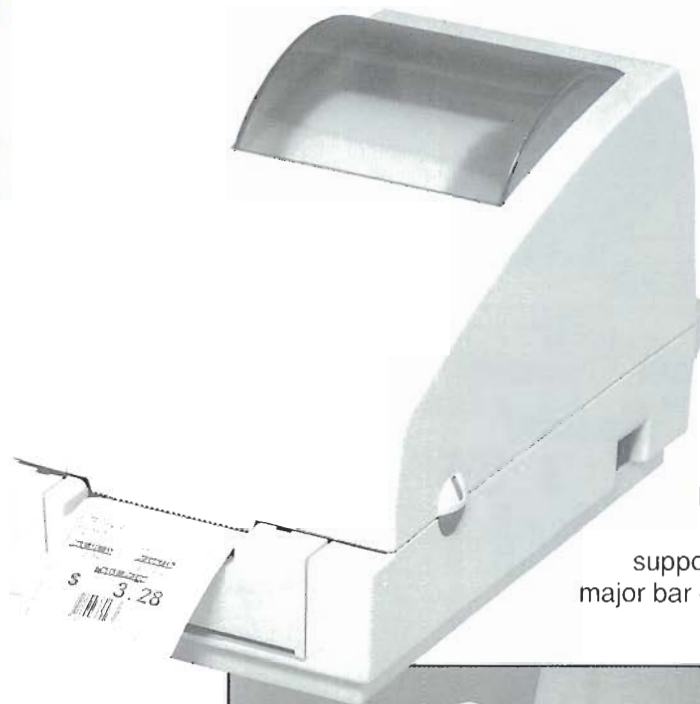


Label Printers for DETECTO'S Price Computing Scales

The P220 high quality Direct Thermal Printer is ideally suited for direct thermal labeling with Detecto's Price Computing Scales. Satisfying the requirements for longevity and high quality with thermal transfer technology. The P220 features a flip-up print head for easy media loading and cleaning. The 5" roll capacity keeps you printing longer while the small footprint fits in the tightest printing environment.

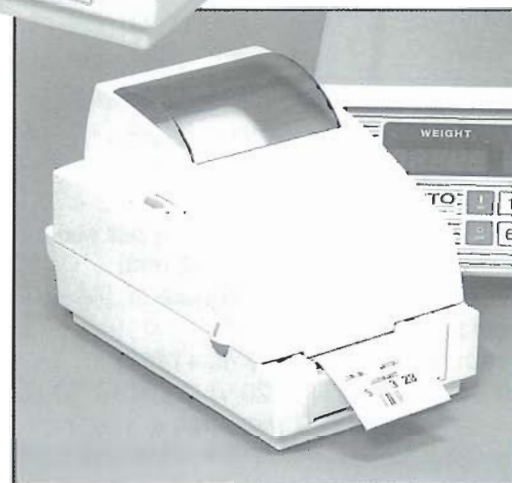

Model
P220
supports all
major bar codes

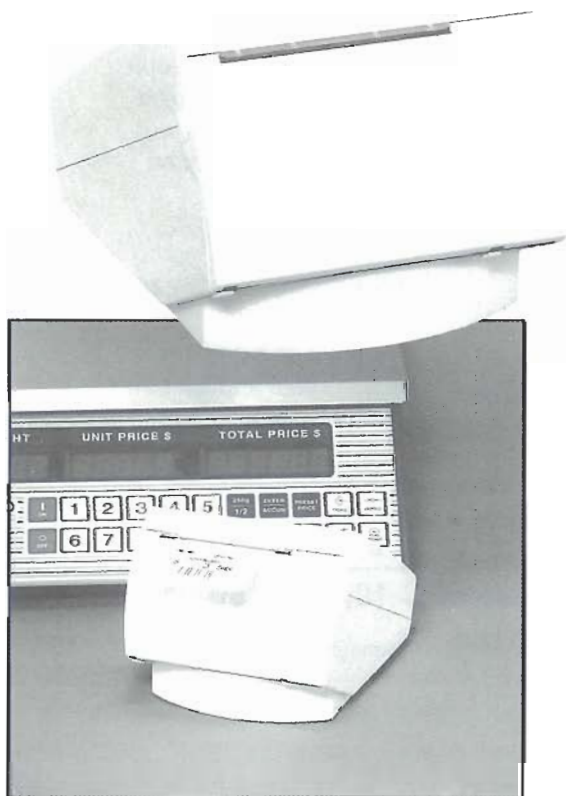


The P200 compact and durable printer measures only 5" x 6" x 4" and, if space is limited, can be wall mounted. The P200's fixed printhead will print on direct thermal paper, labels, and linerless media for virtually every application with superb quality at a reasonable price. With a print resolution of 203 dpi and speed of 1" per second, the P200 easily handles demanding label printing jobs.

The P200 offers superior printing quality at an affordable price.

Space-Saving, Low Cost Printers for Price Computing Scales!

Capable of printing alphanumeric data, bar codes and graphics in a variety of formats on different size labels, these printers are ideal for Detecto Price Computing Scales. Customized printing features include "Packed on" or "Sell by" date and a 32 character bottom line store address or Bar Code prefix.

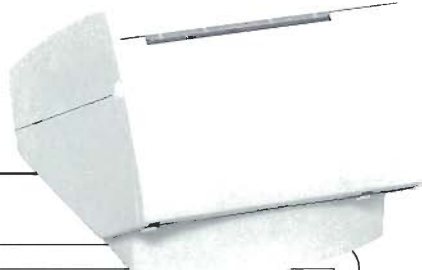

| | |
|--|---------------------|
| THE FOOD STORE | |
| Packed On / / | Sell By / / |
| Net Wt lb 2.00 | Price/lb \$ 1.78 |
| Total Price | |
| \$ 3.56 | |
|  2 70662 00356 9 | |

**Model P200
Price
Computing
Scale Printer**

Actual Size

| | |
|--|---------------------|
| THE FOOD STORE | |
| Packed On / / | Sell By / / |
| Net Wt lb 2.56 | Price/lb \$ 1.28 |
| Total Price | |
| \$ 3.28 | |
|  2 70662 00328 6 | |

**Model P220
Price
Computing
Scale Printer**

Actual Size

P200 SPECIFICATIONS

Print Method: High resolution (203 dpi) direct thermal with fixed print head

Max. Print Speed: 1" (25 mm) per second

Max. Print Width: 2.83" (72 mm)

Max. Print Area: 10" square in. (66 square cm)

Operating Temperature: -40° to +140° F (5° to 40°C)

Power: 120 VAC ± 10%, 60 Hz (nominal) at 1 amp max.

Resident Bar Codes: UPC-A retail applications

Graphics Support: Lines, boxes, and PCX bitmap

Interface: RS-232/TTL Serial

Dimensions: 5"W x 6"D x 4"H (125 x 153 x 102 mm)

Weight: 4.2 lb (1.9 kg)

P220 SPECIFICATIONS

Print Method: High resolution (203 dpi) direct thermal with fixed print head

Max. Print Speed: 2" (50 mm) per second

Max. Print Width: 2.36" (60 mm)

Max. Print Area: 2.20" (56 mm)

Operating Temperature: -40° to +140° F (5° to 40°C)

Power: 120 VAC ± 10%, 60 Hz (nominal) at 1 amp max.

Resident Bar Codes: UPC-A retail applications


Graphics Support: Lines, boxes, and graphics

Interface: RS-232 or Centronics parallel

Dimensions: 6.09"W x 10.31"D x 6.77"H (155 x 262 x 171 mm)

Weight: 2.78 lb (1.26 kg)

Cable is included with each printer to connect to Detecto's PC-10, 20, or 30

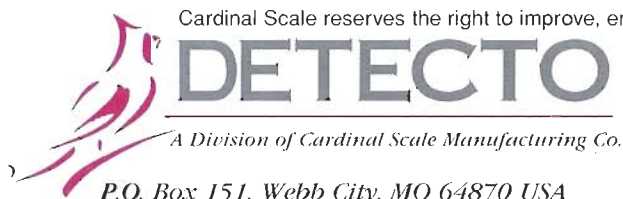

Sold

P.O. Box 151, Webb City, MO 64870 USA
 Ph: 417-673-4631 or 800-641-2008 • Fax: 417-673-5001

Visit our Web site at <http://www.cardet.com>

© Copyright 1997 Cardinal Scale Mfg. Co. • Printed in USA • D-244/1197MWC