



# SANDWICH/SALAD UNITS



ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

### 27" Wide Models:

P-6

### 45" Wide Models:

P-10-6, P-10-8, & P-10-12

### 59" Wide Models:

P-15-8, P-15-12, & P-15-16

### Standard Features

- "One-shot" high-pressure, foamed-in-place Polyurethane insulation
- Automatic defrost
- Matched coil and compressor
- Energy-free automatic condensate evaporator
- No need for plumbing or floor drains
- Heavy-duty stainless steel tops, fronts, doors and exterior ends
- 6" adjustable legs
- Full access, combination stainless steel telescoping box cover and utility shelf
- 4" deep salad/condiment pans
- 12", full-width removable/reversible synthetic cutting board
- Interior thermometer



## Specifications

**Cabinet** - Stainless steel top, front, door(s) and exterior ends. All metal, welded construction. All joints and seams closed and sealed. Enclosed rear with removable machine compartment panel, Zinc coated steel exterior bottom and rear with coved, sanitary aluminum interior (S/S interior available if specified.). Salad and sandwich unit model tops are provided with foamed-in-place, high impact non-conducting thermobarrier, raised edge breaker frame. Opening fitted with 1/6 size 4" deep high-impact plastic salad pans. Openings will accommodate 6" deep inserts (not provided). The unit is supported by 6" minimum height adjustable legs with non-marring feet.

**Doors** - Self-closing with full face S/S exterior and aluminum inner pan standard, stainless steel optional. Door insulated with one-shot, polyurethane and one piece vinyl, self-adjusting

magnetic gasket keyed into a thermal-breaker retainer frame. Gaskets are removable without tools for cleaning. All door openings have full perimeter minimum-wattage anti-condensate heaters behind the S/S facia to retard condensation. One piece door pull with concealed self-closing hinge mechanism, safety stops and stay open feature. Doors on the single section models are reversible and can be quickly rehinged without special tools (with additional hardware). These are shipped from factory hinged on the right, facing cabinet.

**Insulation** - Entire cabinet and door insulated with special, extra rigid one-shot, high pressure, foamed-in-place, closed cell polyurethane, average thickness 2".

**Interior Shelves** - Two heavy-duty, adjustable,


removable epoxy coated shelves are furnished for each door section.

**Self-Contained Refrigeration** - The system is a forced-air, automatic defrost, hermetic design with R-22 refrigeration, capillary-metering device, and automatic, adjustable thermostat. It is self-contained with air-cooled, condensing unit and a high-efficiency, space-saver diffuser with high-humidity, fin coil for extra long life. All models are complete with a removable, energy free automatic condensate evaporator. No floor drain or plumbing connections required.

All units are performance tested on the production line prior to shipping.

McCall Refrigeration / 81 West Holly Street / Parsons, TN 38363  
 Phone (901) 847-5570 / Fax (901) 847-9012 / 1-888-REACH-IN (1-888-732-2446) / www.4mccall.com  
 October 1999 / Printed in U.S.A.

# SANDWICH/SALAD UNITS

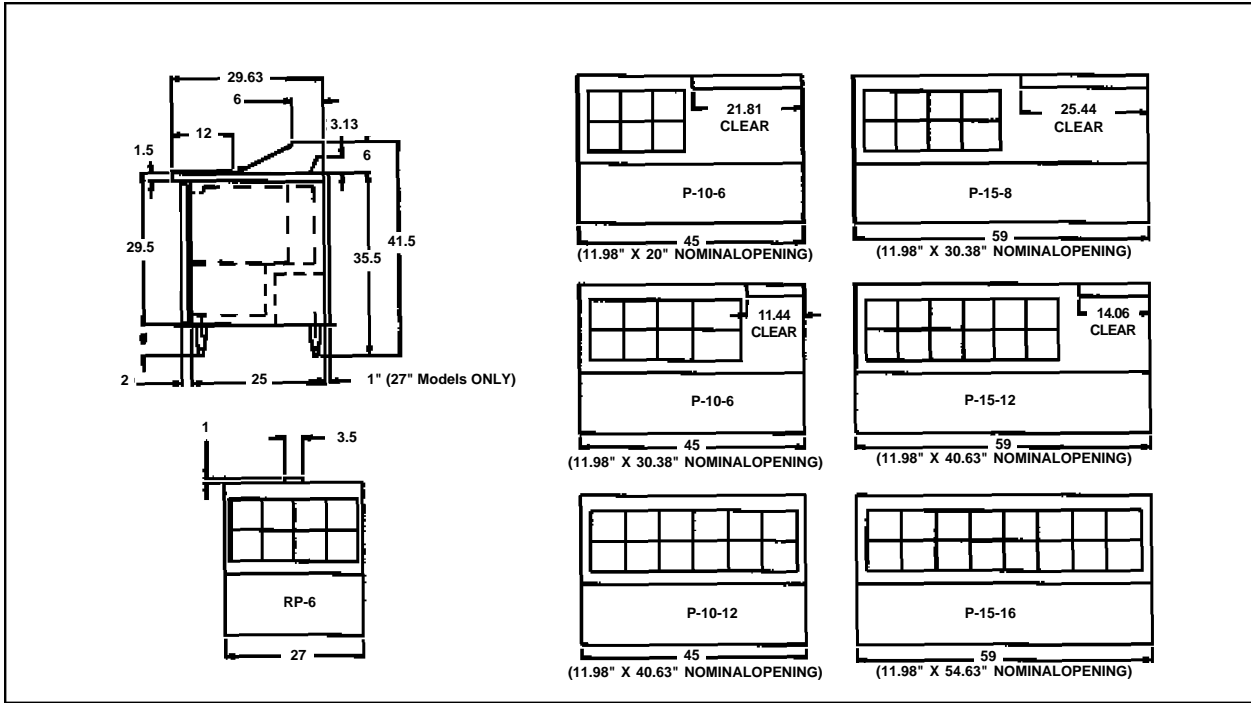

## Options

### Description

- |   |   |  |
|---|---|--|
| <input type="checkbox"/> Stainless steel interior<br><input type="checkbox"/> Stainless steel exterior rear | <input type="checkbox"/> Stainless steel overhead shelf<br><input type="checkbox"/> Door lock, individual cylinder type, keyed alike. | <input type="checkbox"/> **Swivel casters, 2 with brakes, 2 without. |
|---|---|--|

## Statistics

### Single Door Sandwich Units (27" Models)

| Model | Capacity (Cu. Ft.) | Length | Depth  | Wrkg. Ht. | Shelf Area (Sq. Ft.) | Top                  | Comp HP | BTUH* | Cabinet Amps |
|-------|--------------------|--------|--------|-----------|----------------------|----------------------|---------|-------|--------------|
| P-6   | 7                  | 27"    | 30.63" | 35.50"    | 7                    | 8 Std. 1/6 Size Pans | 1/5     | 1755  | 6            |

### Two Door Sandwich Units (45" Models)

| Model   | Capacity (Cu. Ft.) | Length | Depth  | Wrkg. Ht. | Shelf Area (Sq. Ft.) | Top                    | Comp HP | BTUH* | Cabinet Amps |
|---------|--------------------|--------|--------|-----------|----------------------|------------------------|---------|-------|--------------|
| P-10-6  | 12                 | 45"    | 29.63" | 35.50"    | 12.74                | 6 Std. 1/6" Size Pans  | 1/5     | 1755  | 8            |
| P-10-8  | 12                 | 45"    | 29.63" | 35.50"    | 12.74                | 8 Std. 1/6" Size Pans  | 1/5     | 1755  | 8            |
| P-10-12 | 12                 | 45"    | 29.63" | 35.50"    | 12.74                | 12 Std. 1/6" Size Pans | 1/5     | 1755  | 8            |

### Two Door Sandwich Units (59" Models)

| Model   | Capacity (Cu. Ft.) | Length | Depth  | Wrkg. Ht. | Shelf Area (Sq. Ft.) | Top                    | Comp HP | BTUH* | Cabinet Amps |
|---------|--------------------|--------|--------|-----------|----------------------|------------------------|---------|-------|--------------|
| P-15-8  | 16                 | 59"    | 29.63" | 35.50"    | 17.2                 | 8 Std. 1/6" Size Pans  | 1/4     | 2300  | 10           |
| P-15-12 | 16                 | 59"    | 29.63" | 35.50"    | 17.2                 | 12 Std. 1/6" Size Pans | 1/4     | 2300  | 10           |
| P-15-16 | 16                 | 59"    | 29.63" | 35.50"    | 17.2                 | 16 Std. 1/6" Size Pans | 1/4     | 2300  | 10           |

\*Based on 90°F ambient and 20°F evaporator.

\*\*6" height casters for 27" models. 3 3/4", 5", or 6" casters for 45" and 59" models.

All models 115 Volt, 60 Hz, 6', (3) wire power cord and polarized plug (NEMA 5-15).

Specification subject to change without notice.