



# DIGITAL PORTION SCALES

## Models PS-7 and PS-11

NSF®

### MODEL PS-7

The smooth lines of the molded poly enclosure, lift-off stainless steel commodity tray, and sealed membrane keypad make cleaning the PS-7 easy.

Capacity: 7 lb x 0.1 oz, 112 oz x 0.1 oz,  
112 oz x 1/8 oz, 3000 g x 1 g,  
7 lb x 0.005 lb



Built-in  
Rechargeable  
Battery

### MODEL PS-11

Enjoy the durability of the rugged PS-11 stainless steel all-purpose bench and counter top scale which can switch between five units of measurement at the push of a button.

Capacity: 11 lb x 0.1 oz, 176 oz x 0.1 oz,  
176 oz x 1/4 oz, 5000 g x 2 g, 11 lb x 0.005 lb



# DIGITAL PORTION SCALES



## PS-11

- Easy-To-Read LCD Display
- Power-Saving "Auto-off" Feature
- IP52 Water Resistant Enclosure
- Switch Selectable Units
- NSF Certified
- Disable Different Units of Measure
- Easy-To-Clean, Removable Stainless Steel Tray

Ideal for:  
Food Service Operations • Industrial Applications  
Chemical Industry • Retail Establishments (food, drug)

### PS-11 SPECIFICATIONS

<b>Capacity</b>	11 lb x 0.1 oz, 176 oz x 0.1 oz, 176 oz x 1/4 oz, 5000 g x 2 g, 11 lb x 0.005 lb
<b>Display</b>	5-digit, 0.8" x 0.3" characters with fractions LCD digital display
<b>Dimensions</b>	7.48"W x 9.84"D x 2.17"H 190mm W x 250mm D x 55mm H
<b>Platform Size</b>	6.89"W x 6.5"D (175mm W x 165mm D)
<b>Construction</b>	Stainless steel with stainless steel commodity tray
<b>Tare</b>	100% of full scale capacity
<b>Keys</b>	ON/OFF, ZERO, UNITS
<b>Zero</b>	Established on power up routine and maintained by auto-zero circuitry
<b>Temperature</b>	40° to 105° F (5° to 40° C)
<b>Humidity</b>	25% ~95% RH
<b>Power</b>	Built-in rechargeable battery pack included (7.2 VDC/1200mA) or 115 VAC 50/60 Hz or 230 VAC 50/60 Hz powering a 15 VDC 300mA wall plug-in UL/CSA listed power supply.
<b>Features</b>	<ul style="list-style-type: none"> <li>• Power-saving selectable timing auto shut-off which only goes to sleep when using battery operation.</li> <li>• Low battery indicator.</li> <li>• Rechargeable battery pack is able (after 8 hours of charging) to provide up to 24 hours of continuous use, making it ideal as a portable scale.</li> </ul>




## PS-7

Ideal for:  
Restaurants • Cafeterias • Deli's • Pizza Parlors  
Food Service Professionals (industrial)

### PS-7 SPECIFICATIONS

<b>Capacity</b>	7 lb x 0.1 oz, 112 oz x 0.1 oz, 112 oz x 1/8 oz, 3000 g x 1 g, 7 lb x 0.005 lb
<b>Display</b>	5-digit, 0.8" x 0.3" characters with fractions LCD digital display
<b>Dimensions</b>	8.03"W x 7.87"D x 2.44"H 204mm W x 200mm D x 62mm H
<b>Platform Size</b>	8.02"W x 4.96"D (204mm W x 126mm D)
<b>Construction</b>	Molded poly enclosure with stainless steel commodity tray
<b>Tare</b>	100% of full scale capacity
<b>Keys</b>	ON/OFF, ZERO, UNITS
<b>Zero</b>	Established on power up routine and maintained by auto-zero circuitry
<b>Temperature</b>	40° to 105° F (5° to 40° C)
<b>Humidity</b>	25% ~95% RH
<b>Power</b>	115 VAC 50/60 Hz or 230 VAC 50/60 Hz powering a 15 VDC 300 mA wall plug-in UL/CSA listed power supply or one (1) 9 VDC Alkaline battery (battery not included).
<b>Features</b>	<ul style="list-style-type: none"> <li>• Power-saving selectable timing auto shut-off which only goes to sleep when using battery operation.</li> <li>• Low battery indicator.</li> </ul>

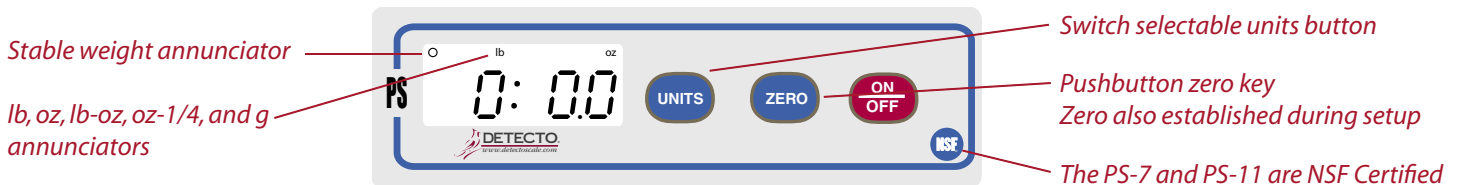

Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice. All registered trademarks are the property of their respective owners.

 **DETECTO**  
A Division of Cardinal Scale Manufacturing Co.  
203 E. Daugherty, Webb City, MO 64870 USA  
Ph: 417-673-4631 or 1-800-641-2008 Fax: 417-673-5001  
www.detectoscale.com

**SOLD BY:**