

BUNN®

Single Soft Heat® Brewer with Docking System

ITEM# _____

PROJECT _____

DATE _____



Model Single SH with 1.5 gallon SH Server*

(server sold separately)

Dimensions: 35.8" H x 9.3" W x 20.0" D
(90.9cm H x 23.6cm W x 50.8cm D)

Features

Coffee brewers with portable servers

- Brews 10.6 to 11.4 gallons (40.1 to 43.2 liters) of perfect coffee per hour.
- Brews ½, 1, or 1½ gallon (1.9, 3.8, 5.7 liters) batches.
- Patented server heat control automatically shuts off once target temperature is reached. Can be set to 175°-190°F (79.4°-87.8°).
- Electronic grinder interface communicates to grinder on exact amount of coffee for selected brew batch size.
- Remote 1 or 2 server docking stations for additional satellite coffee serving.
- Safety-Fresh® patented brew-through lid with vapor seal and spill prevention.
- Variable batch selector knob lets you brew large batches or small servings.
- International electrical configurations available.

For current specification sheets and other information, go to www.bunn.com.

* International models may vary in appearance.

Related Products

Easy Clear® EQ-11-TL

Product No. : 30344.1001

Dimensions:

15⁷/₈" H x 3⁵/₈" W x 4¹⁷/₃₂" D
40.3 cm H x 9.21 cm W x 11.5 cm D



Single/Dual Filter Pack

Product No. : 20138.0000

Packed per case: 500

Dimensions:

5¹/₄" Base x 4¹/₄" Sidewall
13.3 cm Base x 10.8 cm Sidewall



SH Server

Product No.: 27850.0001

1SH Stand

Product No.: 27825.0000



Easy Clear® ED-11-TL

Product No. : 30244.1001

Dimensions:

14⁹/₁₆" H x 5¹/₁₆" W x 5¹/₁₆" D
36.0 cm H x 12.6 cm W x 12.6 cm D



One Position Drip Tray


For use with Single/Single SH

Product No. : 26830.0000

One Position Drip Tray

For use with RWS1

Product No. : 20213.0103



Model	Agency Listing	International Model	Agency Listing
Single SH	UL NSF	Single SH	CE G

Patents Apply

10/04

A2.6

Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Capacity	Cu. Ft.	Shipping Weight	Cord Attached
Single SH Brewer	27800.0001	120/208	18.3	3700	3800	10.6 gal./hr.	7.8	61 lbs. (27.7 kg)	No
Single SH Brewer	27800.0002	120/240	19.1	4000	4300	11.4 gal./hr.	7.9	59 lbs. (26.8 kg)	No
SH Server(1.5 gal.)	27850.0001	n/a	n/a	n/a	n/a	1½ gal.	2.4	17 lbs. (7.7 kg)	No
SH Server(1.75 gal.)	27850.0002	n/a	n/a	n/a	n/a	1¾ gal.	2.4	18 lbs. (8.2 kg)	No
SH Server*(1.5 gal.)	27850.0004	n/a	n/a	n/a	n/a	1½ gal.	2.4	18 lbs. (8.2 kg)	No
SH Server*(1.5 gal.)	27850.0008	n/a	n/a	n/a	n/a	1½ gal.	2.4	18 lbs. (8.2 kg)	No
1SH Stand	27825.0000	120	.8	n/a	90	1 SH Server	1.2	13 lbs. (5.9 kg)	Yes
1SH Stand*	27825.0004	120	.8	n/a	90	1 SH Server	1.2	13 lbs. (5.9 kg)	Yes
2SH Stand	27875.0000	120	1.5	n/a	180	2 SH Servers	2.1	22 lbs. (10.0 kg)	Yes
2SH Stand*	27875.0003	120	1.5	n/a	180	2 SH Servers	2.1	22 lbs. (10.0 kg)	Yes

*Models have black decor. Note: Soft Heat Brewers and Servers are boxed and shipped separately.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Electrical: Brewer is 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" (6.4 mm) male fitting.

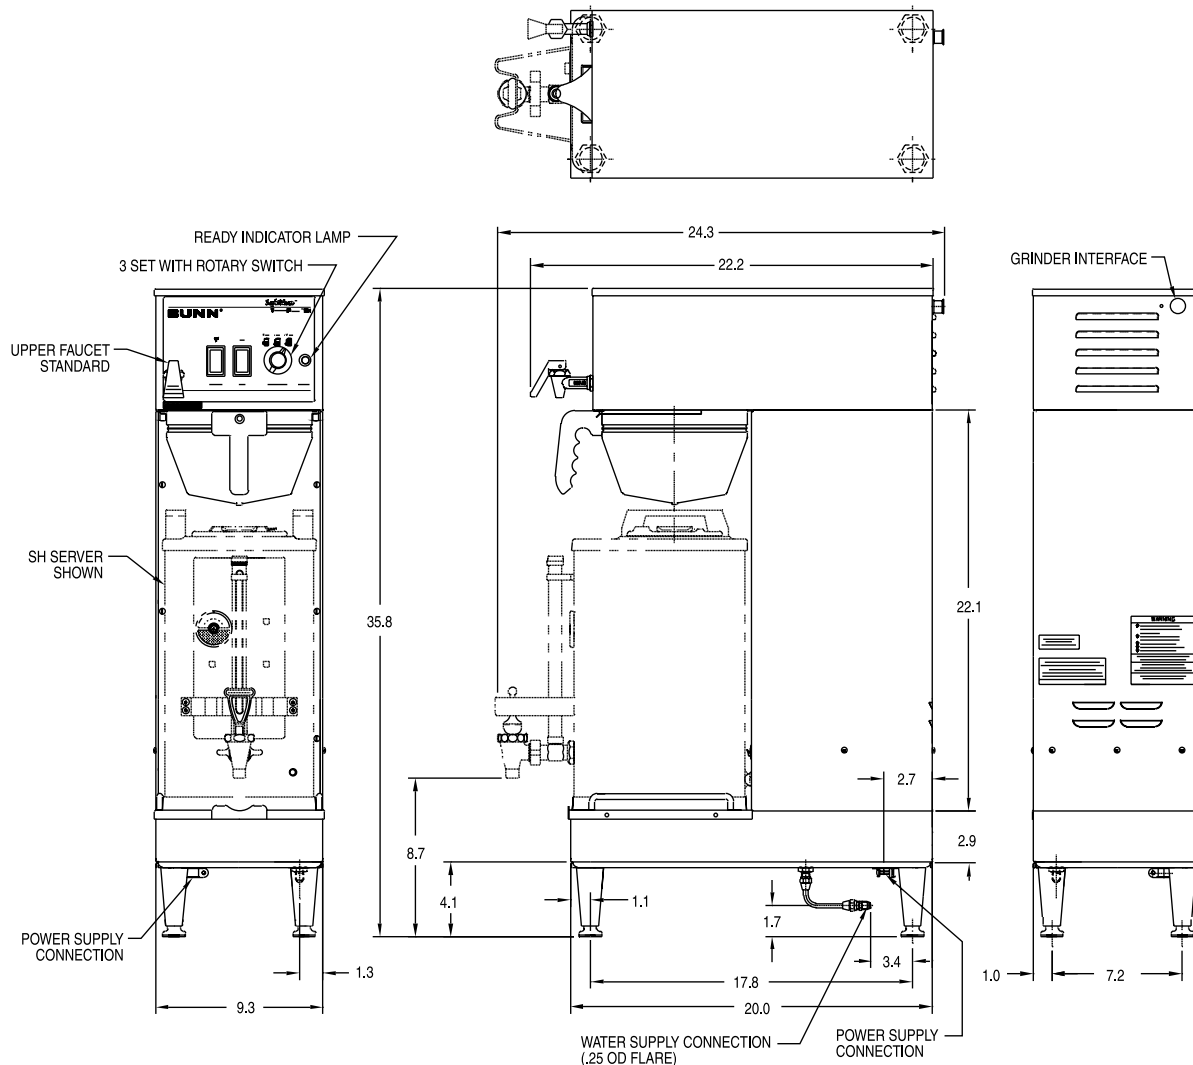

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.