



SANITATION CERTIFIED HIGH PERFORMANCE 7

Ambient (Unheated) Air Curtain

Data Sheet

For Door Heights To 7' (insect control)

STANDARD CONSTRUCTION

- EPH Listed per NSF 37
- 14" high x 13" deep
- 3/4 hp single speed motor(s)
- White aluminum exterior cover (Optional: Custom Color or Stainless)
- Wall Mounting (Top optional)



Berner International Corporation certifies that the air curtains shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (unheated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.



5 Year Limited Warranty



for outdoor use



Air Curtain Fans for ANSI/NSF37 Customer Entry maximum mounting height is 7'

MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Net Wt. (lbs)
SHC07-1036A	36.00	5,917	2,071	1,812	72%	0.68	1 @ 3/4	50
SHC07-1042A	42.00	4,418	1,716	1,752	79%	0.75	1 @ 3/4	52
SHC07-1048A	48.00	3,815	1,613	1,882	55%	0.73	1 @ 3/4	53
SHC07-2060A	60.00	3,963	1,869	2,726	74%	1.18	2 @ 3/4	70
SHC07-2072A	72.00	5,917	2,071	3,624	72%	1.36	2 @ 3/4	84
SHC10-2084A	87.00	4,418	1,657	3,504	79%	1.50	2 @ 3/4	104
SHC10-2096A	99.00	3,815	1,564	3,764	55%	1.46	2 @ 3/4	106
SHC10-3108A	114.00	5,917	1,962	5,436	72%	2.04	3 @ 3/4	150
SHC10-3120A	116.50	4,418	1,899	5,376	72%	2.11	3 @ 3/4	152

NOTE: Operation at 50 Hz will generate approximately a 17% reduction in air performance.
See sheet EP-310 for amp draws/total load requirements.

VELOCITY PROFILE: Model SHC07-1036A			
Distance from Nozzle (in)	40	60	80
Core Velocity (fpm)	2133	1533	1303

MODEL NUMBER CONFIGURATION

SHC07-1 036 A A-B-SS

Series	# of Motors	Opening Width	Heat	Voltage	Opt. Switch	Opt. Cabinet Finish
SHC07	1, 2	036" - 120"	A=Ambient	*A=120/1/60 B=208/1/60 J=240/1/60 V=220/1/50	Built-In Switch	SS=Stainless Steel CC=Custom Color

*Suitable for 50hz
Consult Factory for other voltages

Sound level measured 10' (3m) from the unit in free field:
1 & 2 motor(s): 66 dBA & 69 dBA
Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.



CERTIFIED HIGH PERFORMANCE 7

Ambient (Unheated) Air Curtain Electrical Performance Sheet

		120/1/60 (voltage code A) MOTOR AMP DRAW = 7.5 each		208/1/60 (voltage code B) or 220/1/50 (voltage code V) MOTOR AMP DRAW = 3.8 each			240/1/60 (voltage code J) MOTOR AMP DRAW = 3.8 each		
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
SHC07-1036A SHC07-1042A SHC07-1048A	1	7.5	15	1	3.8	15	1	3.8	15
SHC07-2060A SHC07-2072A SHC07-2084A SHC07-2096A	1	15.0	20	1	7.6	15	1	7.6	15
SHC07-3108A SHC07-3120A	1	22.5	30	1	11.4	15	1	11.4	15

		480/3/60 (voltage code Z) MOTOR AMP DRAW = 1.8 each		600/3/60 (voltage code Q) MOTOR AMP DRAW = 1.5 each		
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
SHC07-1036A SHC07-1042A SHC07-1048A	1	1.8	15	1	1.5	15
SHC07-2060A SHC07-2072A SHC07-2084A SHC07-2096A	1	3.6	15	1	3.0	15
SHC07-3108A SHC07-3120A	1	5.4	15	1	4.5	15





Berner reserves the right to alter specifications without prior notice.

SHC07

AMBIENT SYSTEM SINGLE SPEED

NOTES:

- ⚠ AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C .
- ⚠ ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- ⚠ FIELD VERIFY DIMENSIONS.
- ⚠ ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- ⚠ ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- ⚠ LETTER 'A' IN MODEL NUMBER DESIGNATES AMBIENT UNIT.
- ⚠ DIMENSIONS IN INCHES [CENTIMETERS].

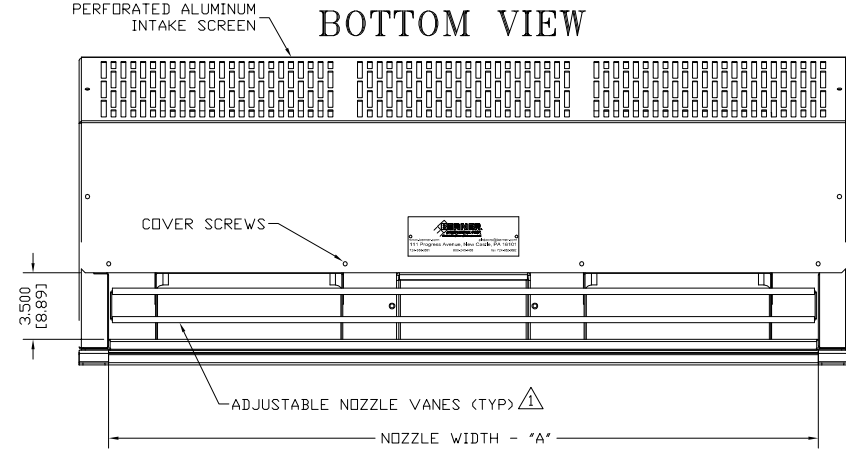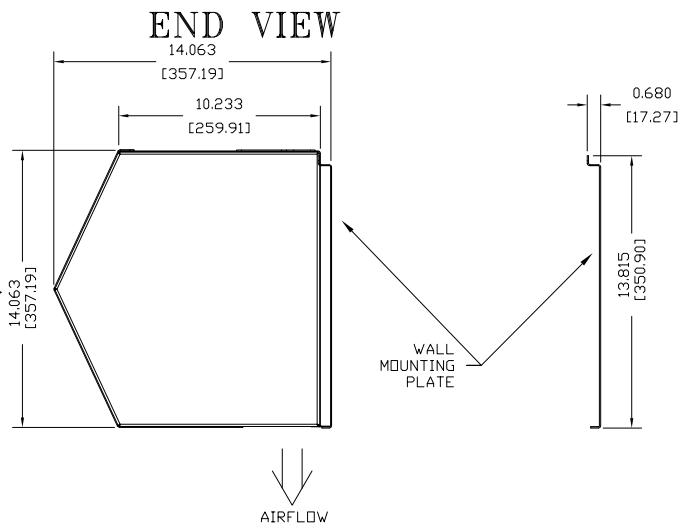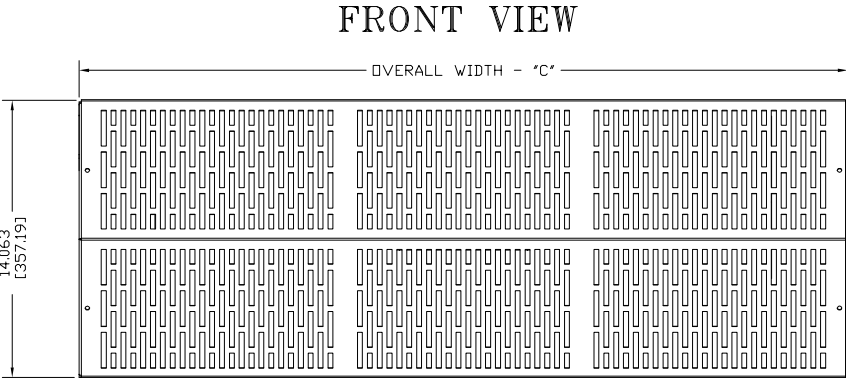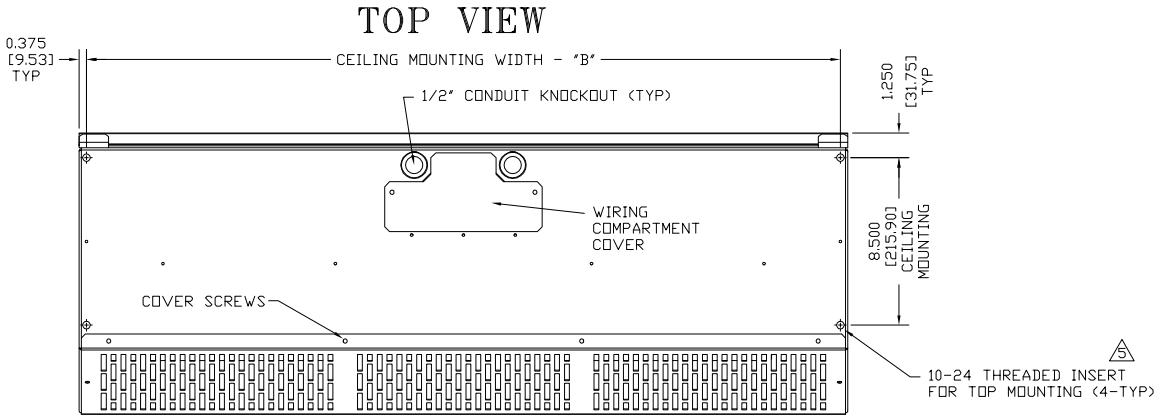

MODEL	NOZZLE "A"	MOUNTING "B"	OVERALL "C"
SHC07-1036A	36.00 [91.44]	38.25 [97.16]	39.00 [99.06]
SHC07-1042A	42.00 [106.68]	44.25 [112.40]	45.00 [114.30]
SHC07-1048A	48.00 [121.92]	50.25 [127.64]	51.00 [129.54]
SHC07-2060A	60.00 [152.40]	62.25 [158.12]	63.00 [160.02]
SHC07-2072A	72.00 [182.88]	74.25 [188.60]	75.00 [190.50]
SHC07-2084A	87.00 [220.98]	89.25 [226.70]	90.00 [228.60]
SHC07-2096A	99.00 [251.46]	101.25 [257.18]	102.00 [259.08]
SHC07-3108A	114.00 [289.56]	116.25 [295.28]	117.00 [297.18]
SHC07-3120A	116.50 [295.91]	118.75 [301.63]	119.50 [303.53]



DWG. NO.	SHC07-AMB	TITLE:	BERNER
DATE	23SEPT14		MODEL SHC07 AIR CURTAIN AMBIENT SYSTEM
BY	S. Beil		
REPLACES	-		
BY	-		BERNER INTERNATIONAL CORP. NEW CASTLE, PA.