

BUNN®

BrewWISE® Single Soft Heat® DBC Brewer

ITEM#

PROJECT

DATE

Features

BrewWISE® Brewing System

- Brews 11.4 gallons (43.2 liters) of perfect coffee per hour.
- Brews ½, 1, or 1½ gallon (1.9, 3.8 or 5.7 liter) batches.
- Stores individual coffee and flavor profiles using adjustable water volume, bypass percentage, Pulse-Brew™, and pre-infusion timing.
- Operate any combination of BrewWISE® equipment error-free with wireless brewer-grinder interface via Smart Funnel.
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present.
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools.
- Consistently brew perfect coffee using Digital Brewer Control with BUNN patented Pulse-Brew.
- Simplify installation and calibration by creating your own recipe cards and dedicated funnels with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- International electrical configurations available.



Model Single SH DBC with 1.5 gallon SH Servers

(servers sold separately)

Dimensions: 35.8" H x 9.3" W x 23.1" D
(90.9cm H x 23.6cm W x 53.8cm D)

For current specification sheets and other information, go to www.bunn.com.

* International models may vary in appearance.

Related Products

Easy Clear® EQ-11-TL

Product No. : 30344.1001

Dimensions:

15⁷/₈" H x 3⁵/₈" W x 4¹⁷/₃₂" D
40.3 cm H x 9.21 cm W x 11.5 cm D



Easy Clear® ED-11-TL

Product No. : 30244.1001

Dimensions:

14³/₁₆" H x 5¹/₁₆" W x 5¹/₁₆" D
36.0 cm H x 12.6 cm W x 12.6 cm D

Single/Dual Filter Pack

Product No. : 20138.0000

Packed per case: 500

Dimensions:

5¹/₄" Base x 4¹/₄" Sidewall
13.3 cm Base x 10.8 cm Sidewall



BrewWISE® Recipe Writer (BRW)

Product No.: 34444.0000 (120V)

Dimensions:

2³/₁₆" H x 6³/₈" W x 9¹/₂" D
5.56 cm H x 16.2 cm W x 24.1 cm D



Recipe Card

Product No.: 34447.0000


- Program a recipe to be used on brewer or grinder.



Ad Card

Product No.: 34448.0000

- Program a message to appear on the brewer's display.



G9-2T DBC

Product No.: 33700.0000

G9-2TA DBC

Intl. Product No.: 33700.0005

- Grinder holds 6 pounds each of regular and decaf or specialty beans.



| Model | Agency Listing | International Model | Agency Listing |
|---------------|----------------|---------------------|----------------|
| Single SH DBC | UL NSF | Single SH DBC | CE G |

Patents Apply

10/04

A2.8

Dimensions & Specifications

| Model | Product # | Volts | Amps | Tank Heater Watts | Total Watts | Capacity | Cu. Ft. | Shipping Weight | Cord Attached |
|----------------------------|------------|---------|------|-------------------|-------------|---------------|---------|-------------------|---------------|
| Single SH DBC | 33600.0000 | 120/240 | 17.5 | 4000 | 4100 | 11.4 gal./hr. | 7.9 | 59 lbs. (26.8 kg) | No |
| Single SH DBC [†] | 33600.0001 | 120/240 | 17.5 | 4000 | 4100 | 11.4 gal./hr. | 7.9 | 59 lbs. (26.8 kg) | No |
| G9-2T DBC | 33700.0000 | 120 | 9.4 | n/a | n/a | n/a | 5.9 | 67 lbs. (30.4 kg) | Yes |
| SH Server(1.5 gal.) | 27850.0001 | n/a | n/a | n/a | n/a | 1½ gal. | 2.4 | 17 lbs. (7.7 kg) | No |
| SH Server(1.75 gal.) | 27850.0002 | n/a | n/a | n/a | n/a | 1¾ gal. | 2.4 | 18 lbs. (8.2 kg) | No |
| SH Server*(1.5 gal.) | 27850.0004 | n/a | n/a | n/a | n/a | 1½ gal. | 2.4 | 18 lbs. (8.2 kg) | No |
| 1SH Stand | 27825.0000 | 120 | .8 | n/a | 90 | 1 SH Server | 1.2 | 13 lbs. (5.9 kg) | Yes |
| 1SH Stand* | 27825.0004 | 120 | .8 | n/a | 90 | 1 SH Server | 1.2 | 13 lbs. (5.9 kg) | Yes |
| 2SH Stand | 27875.0000 | 120 | 1.5 | n/a | 180 | 2 SH Servers | 2.1 | 22 lbs. (10.0 kg) | Yes |
| 2SH Stand* | 27875.0003 | 120 | 1.5 | n/a | 180 | 2 SH Servers | 2.1 | 22 lbs. (10.0 kg) | Yes |


*Models have black decor. †Model has funnel lock system. Note: Soft Heat® Brewers and Servers are boxed and shipped separately.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Electrical: Brewer is 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.

Grinder is 2-wires plus ground service rated 120V, 60Hz, circuit required, ¾ HP motor.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" (6.4 mm) male fitting.

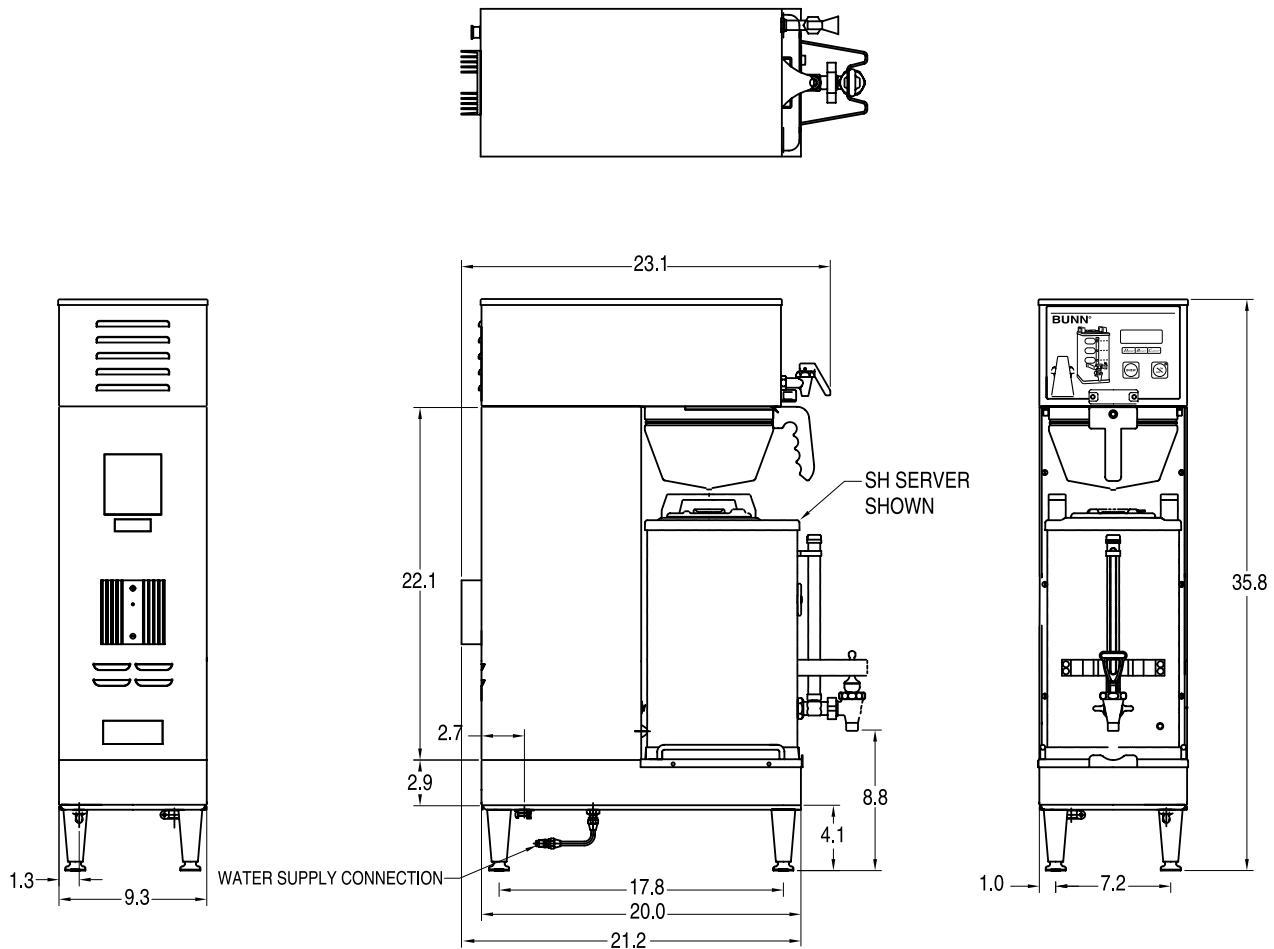

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.