



SUPER SANDWICH/SALAD UNITS



ITEM # _____

MODEL # _____

27" Wide Models:

ST-27-2

45" Wide Models:

ST-45-2 & ST-45-3

59" Wide Models:

ST-59-4 & ST-59-3

Standard Features

- "One-shot" high-pressure, foamed-in-place Polyurethane insulation
- Automatic defrost
- Matched coil and compressor
- Energy-free automatic condensate evaporator
- No need for plumbing or floor drains
- Heavy-duty stainless steel tops, fronts, doors and exterior ends
- 6" adjustable legs
- Full access, combination stainless steel telescoping box cover and utility shelf
- 4" deep salad/condiment pans
- 8.5" full-width removable/reversible synthetic cutting board
- Interior thermometer



Specifications

Cabinet - Stainless steel top, front, door(s) and exterior ends. All metal, welded construction. All joints and seams closed and sealed. Enclosed rear with removable machine compartment panel, Zinc coated steel exterior bottom and rear with coved, sanitary aluminum interior (S/S interior available if specified.). Salad and sandwich unit model tops are provided with foamed-in-place, high impact non-conducting thermobarrier, raised edge breaker frame. Opening fitted with 1/6 size 4" deep high-impact plastic salad pans. Openings will accommodate 6" deep inserts (not provided). The unit is supported by 6" minimum height adjustable legs with non-marring feet.

Doors - Self-closing with full face S/S exterior and aluminum inner pan standard, stainless steel optional. Door insulated with one-shot, polyurethane and one piece vinyl, self-adjusting

magnetic gasket keyed into a thermal-breaker retainer frame. Gaskets are removable without tools for cleaning. All door openings have full perimeter minimum-wattage anti-condensate heaters behind the S/S fascia to retard condensation. One piece door pull with concealed self-closing hinge mechanism, safety stops and stay open feature. Doors on the single section models are reversible and can be quickly rehinged without special tools (with additional hardware). These are shipped from factory hinged on the right, facing cabinet.

Insulation - Entire cabinet and door insulated with special, extra rigid one-shot, high pressure, foamed-in-place, closed cell polyurethane, average thickness 2".

Interior Shelves - Two heavy-duty, adjustable,


removable epoxy coated shelves are furnished for each door section.

Self-Contained Refrigeration - The system is a forced-air, automatic defrost, hermetic design with R-22 refrigeration, capillary-metering device, and automatic, adjustable thermostat. It is self-contained with air-cooled, condensing unit and a high-efficiency, space-saver diffuser with high-humidity, fin coil for extra long life. All models are complete with a removable, energy free automatic condensate evaporator. No floor drain or plumbing connections required.

All units are performance tested on the production line prior to shipping.

McCall Refrigeration / 81 West Holly Street / Parsons, TN 38363
 Phone (901) 847-5570 / Fax (901) 847-9012 / 1-888-REACH-IN (1-888-732-2446) / www.4mccall.com
 October 1999 / Printed in U.S.A.

SUPER SANDWICH/SALAD UNITS

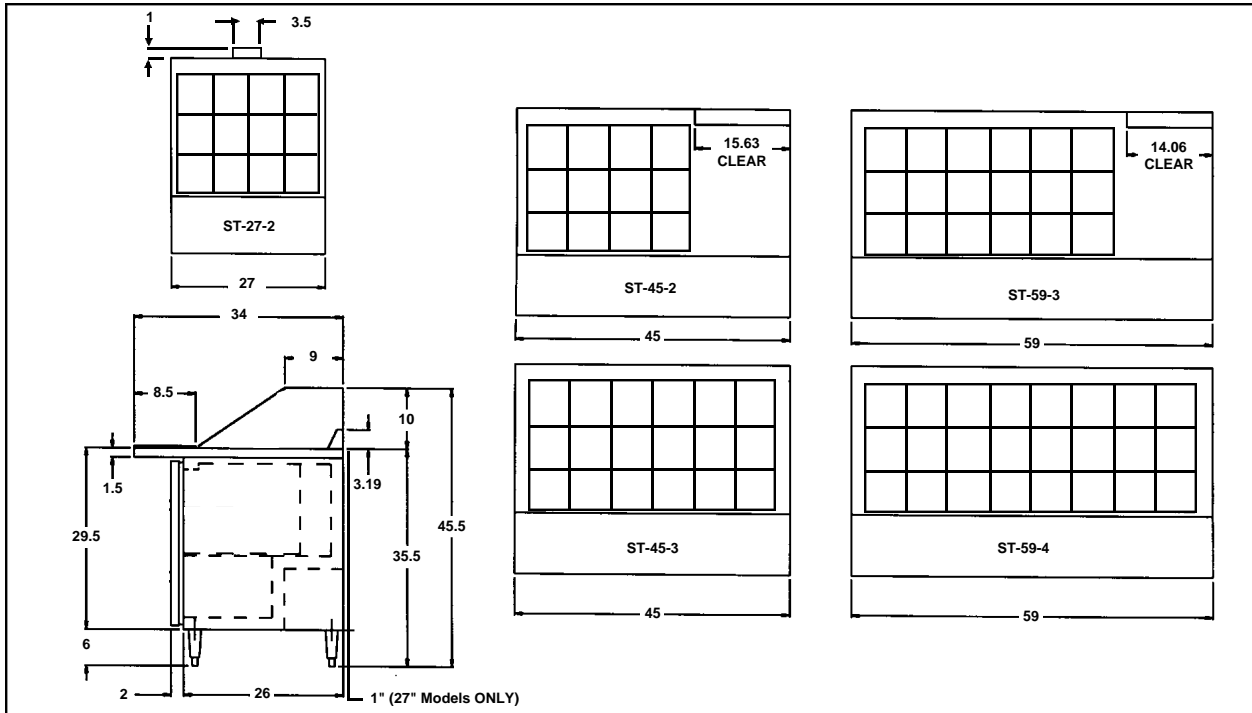

Options

Description

- **Swivel casters, two with brakes and two without brakes.
- Stainless steel overhead shelf.
- Stainless steel interior.
- Stainless steel exterior rear and access panel.
- Door lock, individual cylinder type, keyed alike.

Statistics

Single Door Super Sandwich Units (27" Models)

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Top	Comp HP	BTUH*	Cabinet Amps
ST-27-2	7	27"	35"	35.50"	12 Std. 1/6 Size Pans.	1/5	1755	6

Two Door Super Sandwich Units (45" Models)

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Top	Comp HP	BTUH*	Cabinet Amps
ST-45-2	12	45"	34"	35.50"	12 Std. 1/6 Size Pans.	1/5	1755	8
ST-45-3	12	45"	34"	35.50"	18 Std. 1/6 Size Pans.	1/5	1755	8

Two Door Super Sandwich Units (59" Models)

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Top	Comp HP	BTUH*	Cabinet Amps
ST-59-3	16	59"	34"	35.50"	18 Std. 1/6 Size Pans.	1/4	2300	10
ST-59-4	16	59"	34"	35.50"	24 Std. 1/6 Size Pans.	1/4	2300	10

115 Volt, 60 Hz, 1 phase, 6', (3) wire power cord and polarized plug (NEMA 5-15).

* Based on 90°F ambient and 20°F evaporator.

**6" height casters for 27" models. 3 3/4", 5", or 6" casters for 45" and 59" models.

Specifications subject to change without notice.

McCall Refrigeration / 81 West Holly Street / Parsons, TN 38363
 Phone (901) 847-5570 / Fax (901) 847-9012 / 1-888-REACH-IN (1-888-732-2446) / www.4mccall.com
 October 1999 / Printed in U.S.A.