

## Low Profile Automatic Coffee Brewer with 2 Warmers



### Features

#### Low Profile Automatic Coffee Brewer

- Brews 3.8 gallons (14.4 liters) of perfect coffee per hour.
- Internal components are constructed from stainless steel.
- Hot water faucet.
- Black finish.
- Two individually controlled warmers.
- SplashGard® funnel deflects hot liquids away from the hand.

#### Model VLPF

(decanters sold separately)

Dimensions: 17.4" H x 23.5" W x 13.1" D

(44.2cm H x 59.7cm W x 33.3cm D)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

#### Easy Clear® EQ-17-TL

Product No. : 30200.1000

Dimensions:

12<sup>7</sup>/<sub>16</sub>" H x 2<sup>1</sup>/<sub>2</sub>" W x 3" D

31.6 cm H x 6.35 cm W x 7.62 cm D



#### Paper Filter Pack

Product No. : 20115.0000

Packed per case: 1,000

Dimensions: 4<sup>1</sup>/<sub>4</sub>" Base x 2<sup>3</sup>/<sub>4</sub>" Sidewall

10.8 cm Base x 6.98 cm Sidewall



#### Easy Pour® black decanter

Product No. : 06100.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)



#### Easy Clear® ED-17-TL

Product No. : 30201.1001

Dimensions: 8<sup>1</sup>/<sub>4</sub>" H x 2<sup>5</sup>/<sub>16</sub>" Dia.

20.95 cm H x 5.87 cm Dia.

#### WX1-warmer

Product No. : 06450.0004

One position warmer



#### WX2-warmer

Product No. : 06310.0004 (120V)

Two position warmer



#### WX2A

Product No.: 06310.0006 (200V)

Two position warmer

#### Easy Pour® orange decanter (for decaf)

Product No. : 06101.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)



Model	Agency Listing	International Model	Agency Listing
VLPF	UL NSF	No International model	


## Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
VLPF	07400.0005	120	13.3	1320	1600	3.8 gal./hr.	4.8	28 lbs. (12.7 kg)	Yes

**Brewing capacity:** based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

**Electrical:** Model requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

**Plumbing:** 20-90 psi (138-621 kPa). Machine supplied with 1/4" male flare fitting.

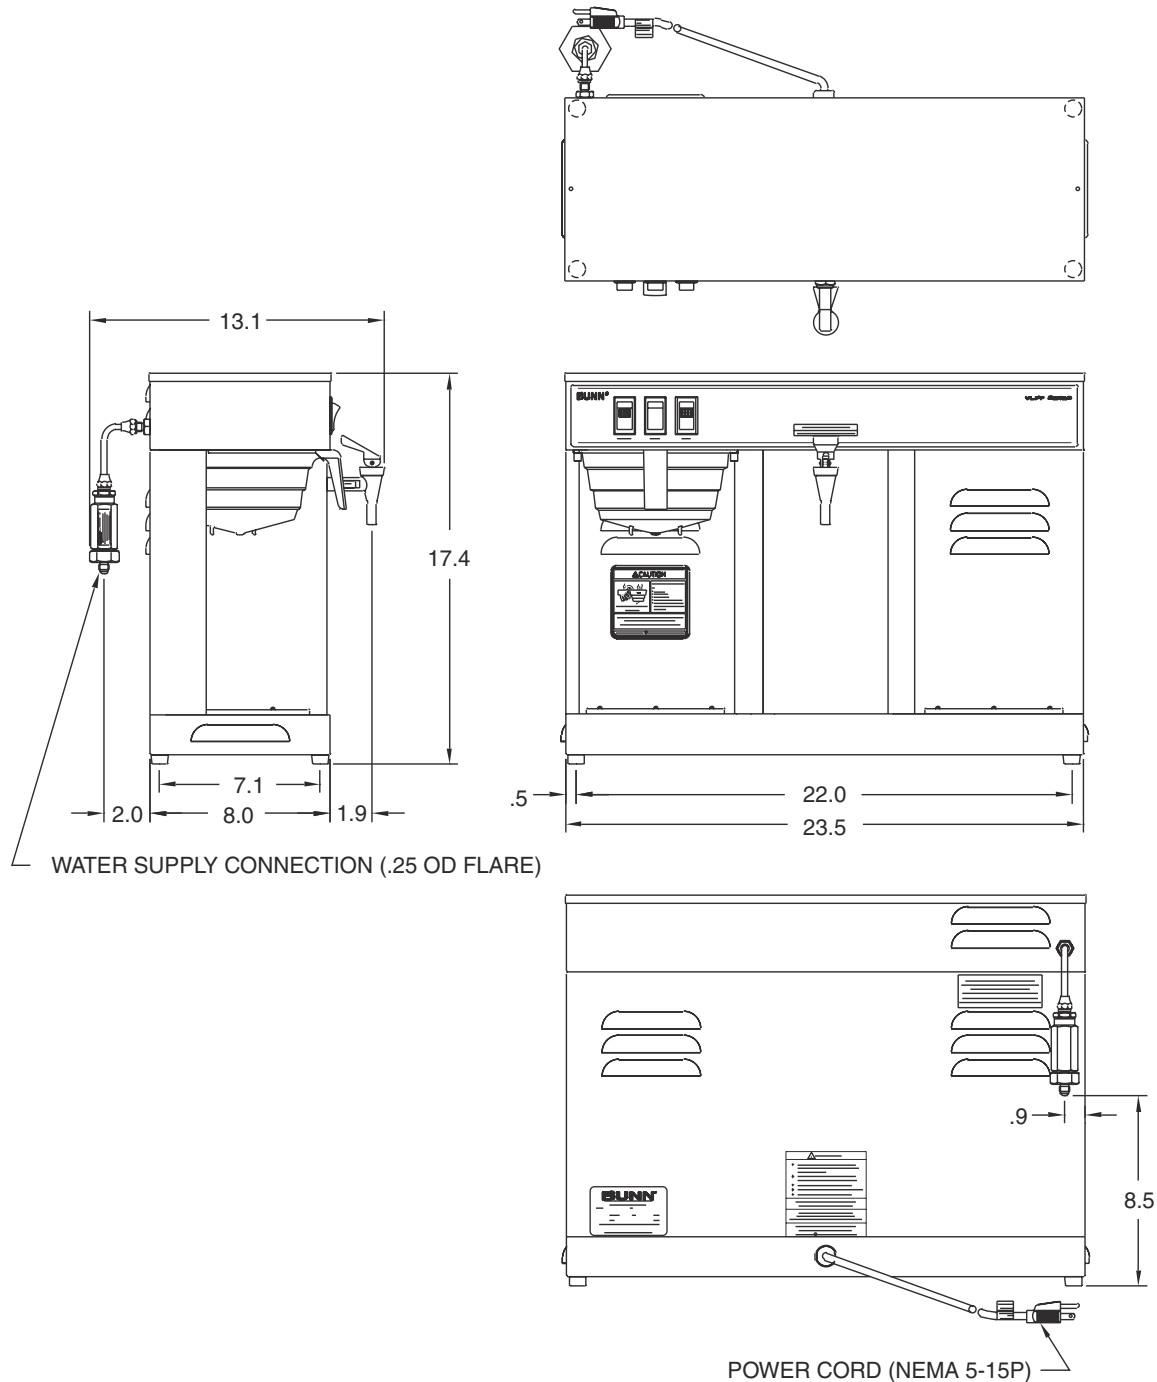

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.